CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:
1. TORQUE TO 13.6Nm +2Nm. DO NOT LOCTITE
2. GASKET THICKNESS.

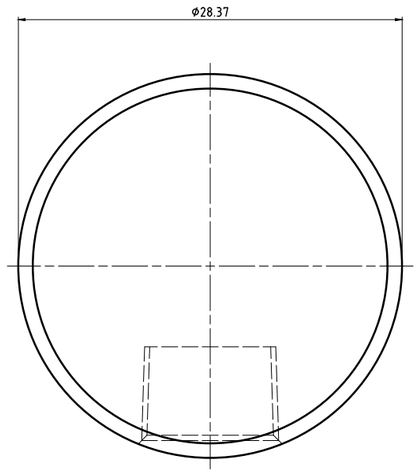

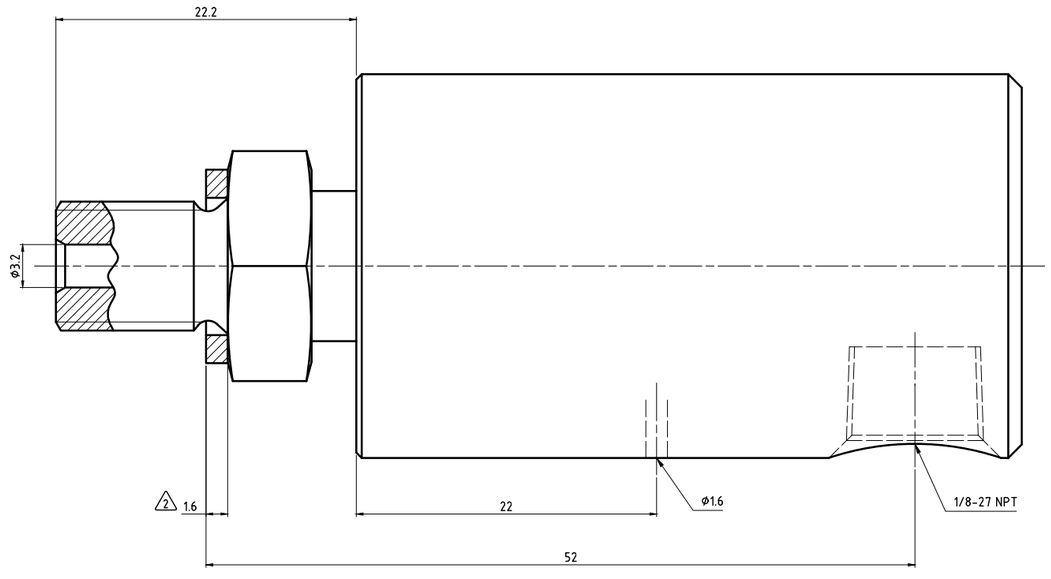

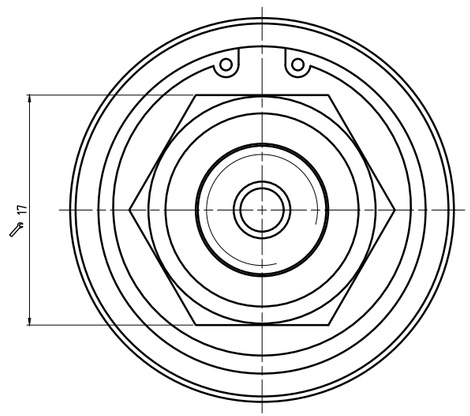

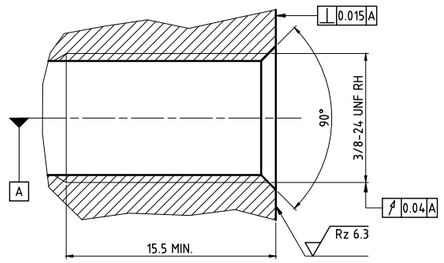

CUSTOMER INTERFACE

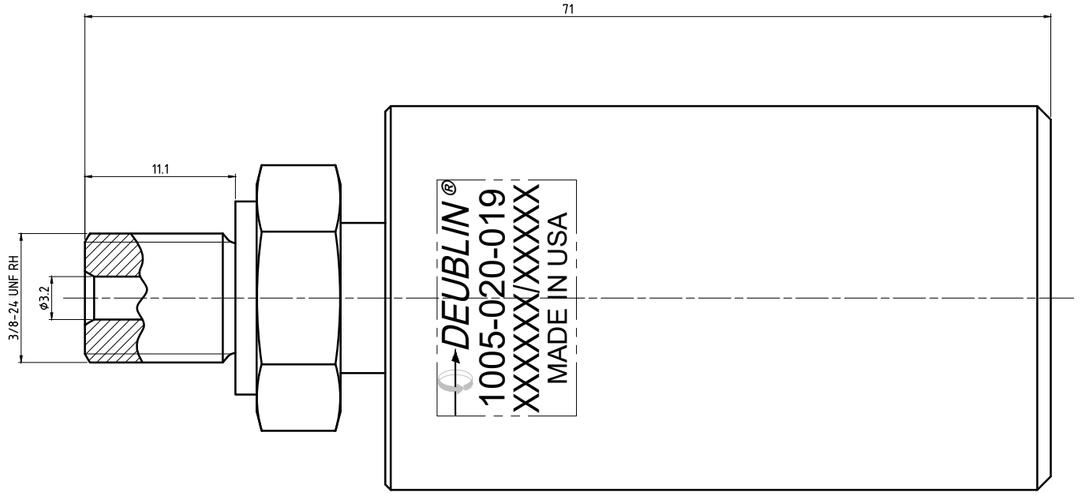

OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX VACUUM	28" Hg	6.7 kPa
MAX HYD. PRESSURE	1000 PSI	70 bar
MAX SPEED	3500 RPM	3500/min
MAX TEMPERATURE	250°F	121°C

ISSUE	MODIFICATION	ECO	DATE	SIGN
D	3D MDTE & REV TABLE	D36779	03/16	RMike
C	ADD VIEWS; UPDATE DATA	D36404	02/16	NR
B	REVISED BORDER TITLE	D18045	04/12	NR
A	UPDATE TO MS	011050	08/10	CB

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

DEUBLIN® Engineered for Performance

PROJECTION:

	DATE	NAME
DRN.	08/20/10	CB
ENGR.	08/23/10	FD
APPD.		

SCALE: 5:1
MATERIAL: INTEFACE CONTROL DRAWING
TITLE: DEUBLIN ROTATING UNION
NO. 1005-020-019
SHEET A2