NOTE:

1 – LUBRICATE INDICATED O-RINGS WITH SILICONE BASED GREASE.

2 – TIGHTEN INDICATED BOLT AND SECURE WITH LOCK NUT.

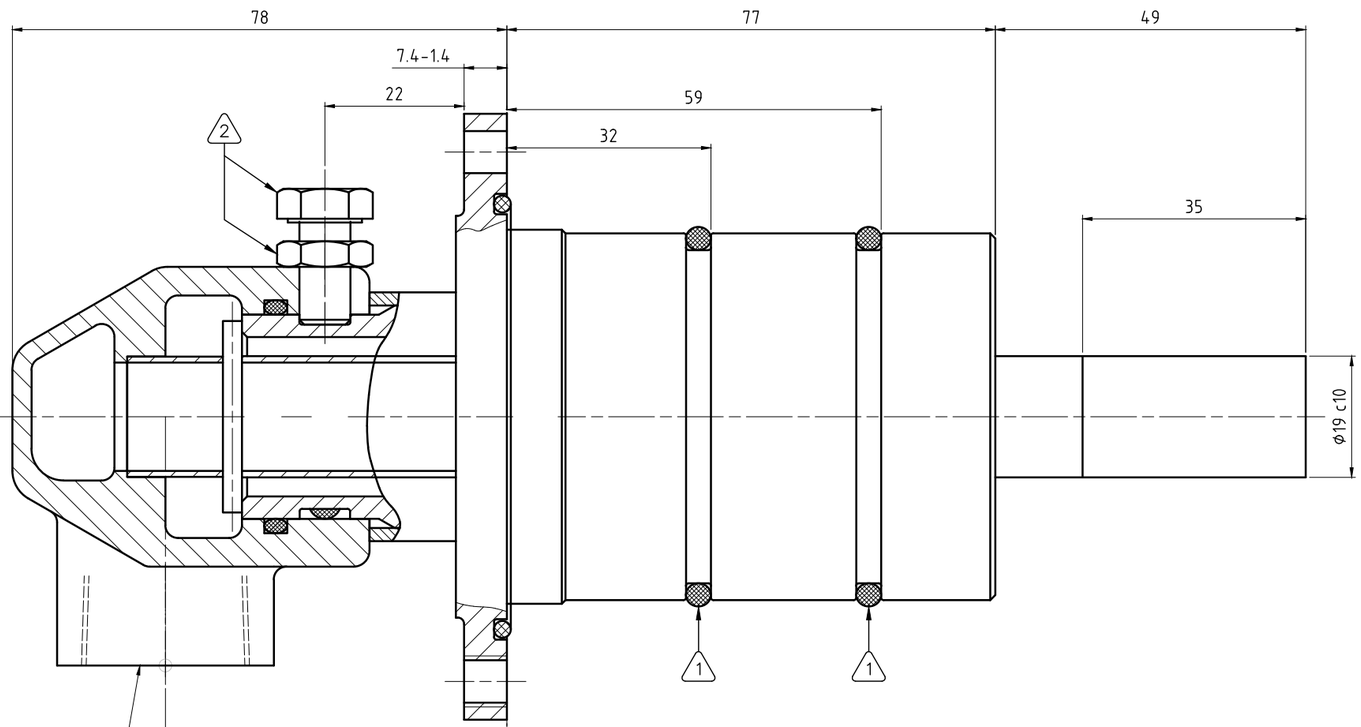

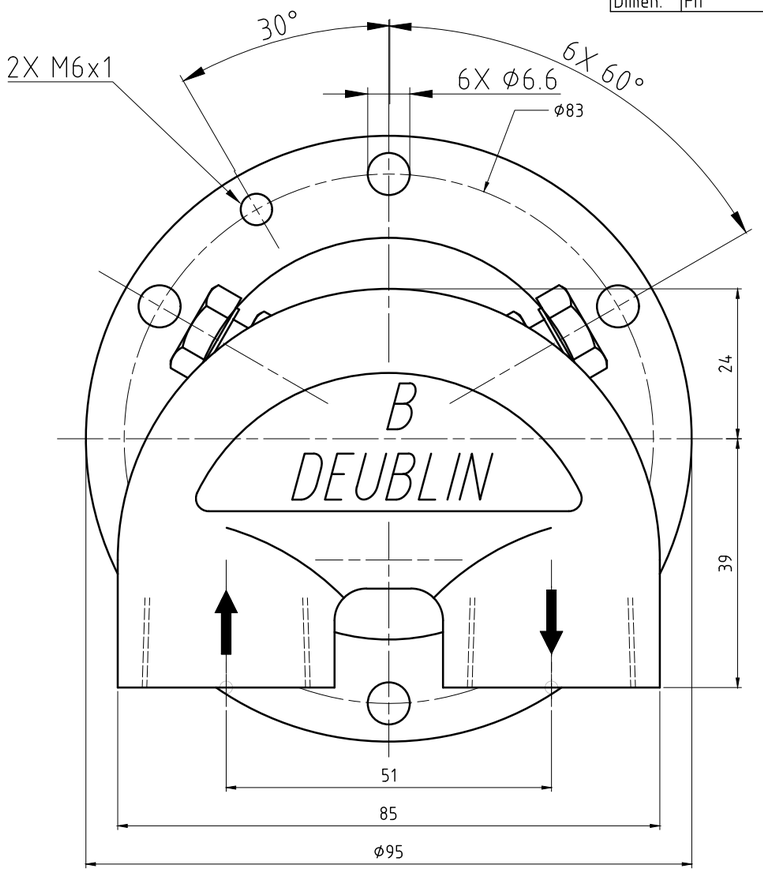

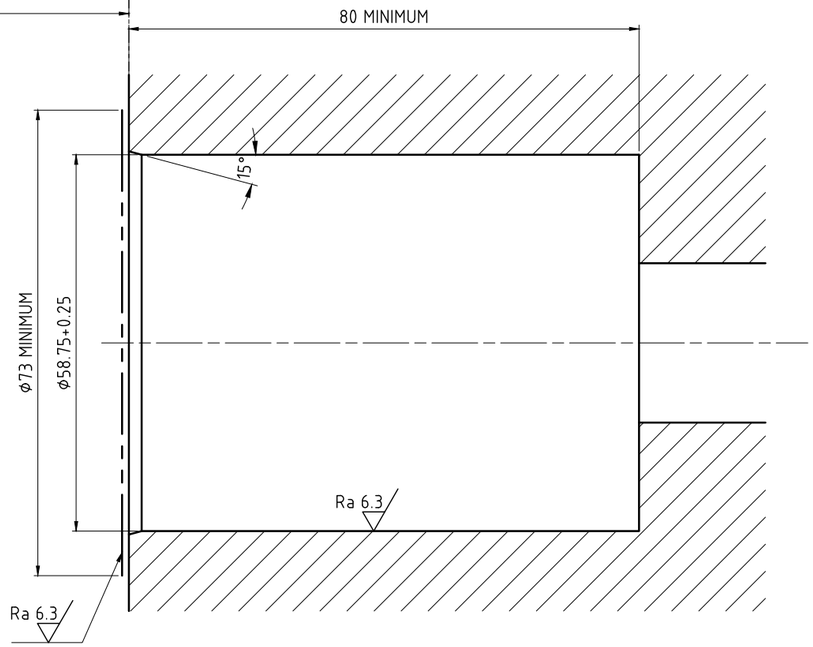

OPERATING PARAMETERS		
MEDIA	WATER	
MAX. PRESSURE	150 PSI	10 bar
MAX. SPEED	100 RPM	100/min
MAX. TEMPERATURE	250 F	121 C
MAX. FLOW	14 GPM	53 L/min

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

ϕ19	c10 -0.11 -0.194	18.89 18.806
Dimen.	Fit	

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

PROJECTION:

SCALE: 1.6667:1

MATERIAL:

	DATE	NAME
DRN.	01/10/07	LG
ENGR.		
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

TITLE: INTERFACE CONTROL DRAWING FOR UNION 2425-002-177-185

NO. 2425-002-177-185-IC

SHEET A2

ISSUE	MODIFICATION	ECO	DATE	SIGN