CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-552

2 - (3) PLUGS INSTALLED HAND TIGHT. NOTE INSTRUCTION MANUAL FOR DRAIN PORT CONNECTION.

3 - 2X MEDIA PORT; 1X PLUGGED APPLIED WITH LOCTITE .

4 - AFTER DRY RUNNING A MAX OF 150 HOURS SEALS MUST BE LUBRICATED WITH COOLANT.

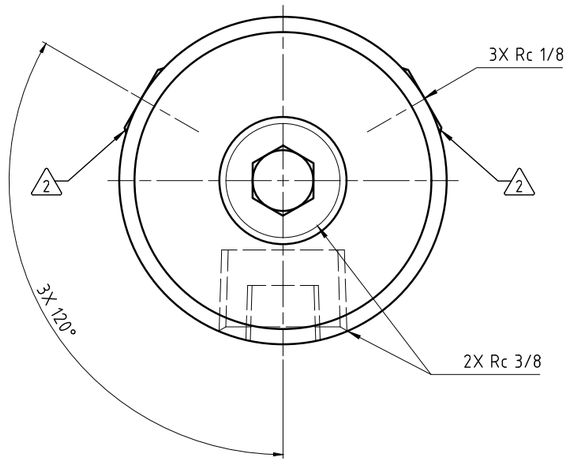

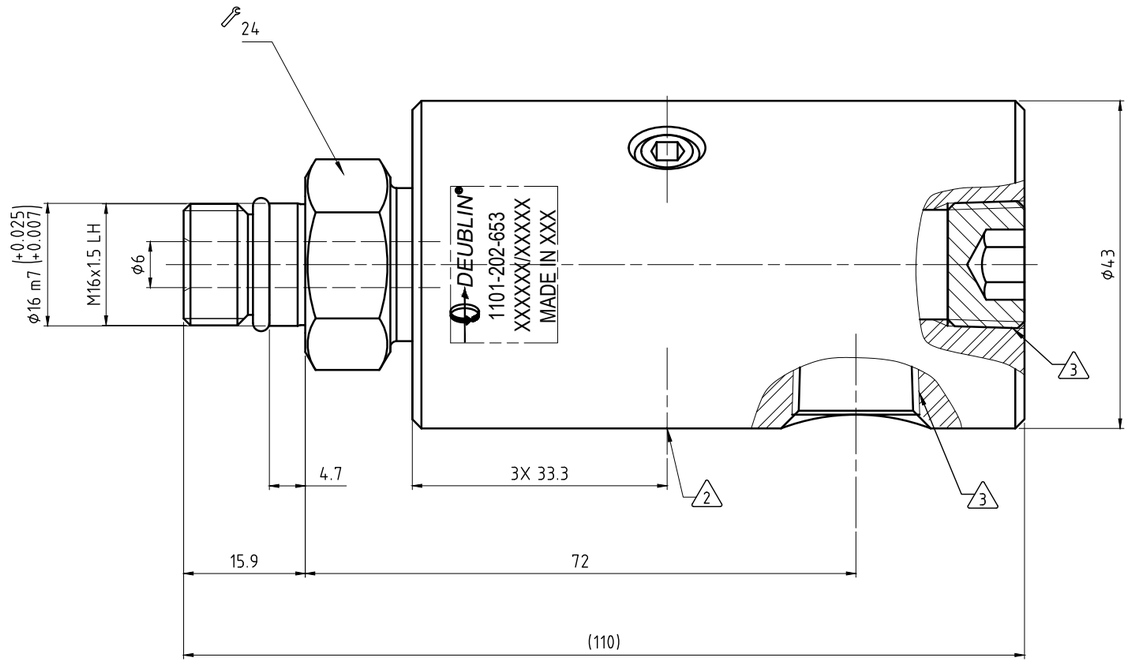

CUSTOMER INTERFACE

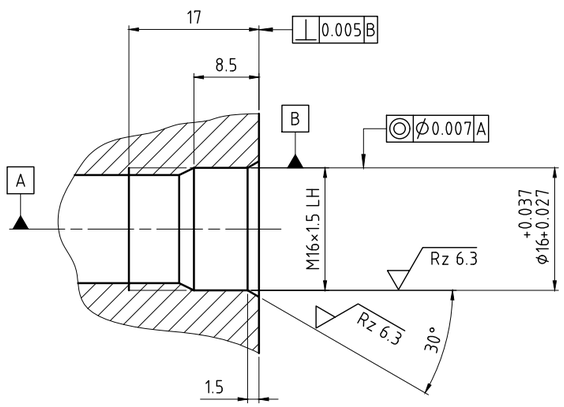

OPERATING DATA			
MEDIA		COOLANT	AIR
MEDIA PRESSURE	MAXIMUM	105 bar	10 bar
	MINIMUM	- bar	1 bar
FLOW RATE	MAXIMUM	24.3 L/min	1128 NL/min
	MINIMUM	- L/min	70 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		15000 min^{-1}	12000 min^{-1}
4 DRY RUN		UNPRESS. ONLY	150 h (max.)
RECOMMENDED FILTRATION		17/15/12	ISO CLASS 4 8573-1

DEUBLIN® Engineered for Performance

PROJECTION:

SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

	DATE	NAME
DRN.	6/15/18	MS
ENGR.	6/15/18	MS
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN

TITLE: DEUBLIN UNION

NO. 1101-203-653

SHEET A2