




CONFIDENTIAL
 The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

φ16	m7	+0.025 -0.007	16.025 16.007
Maß	Passung		

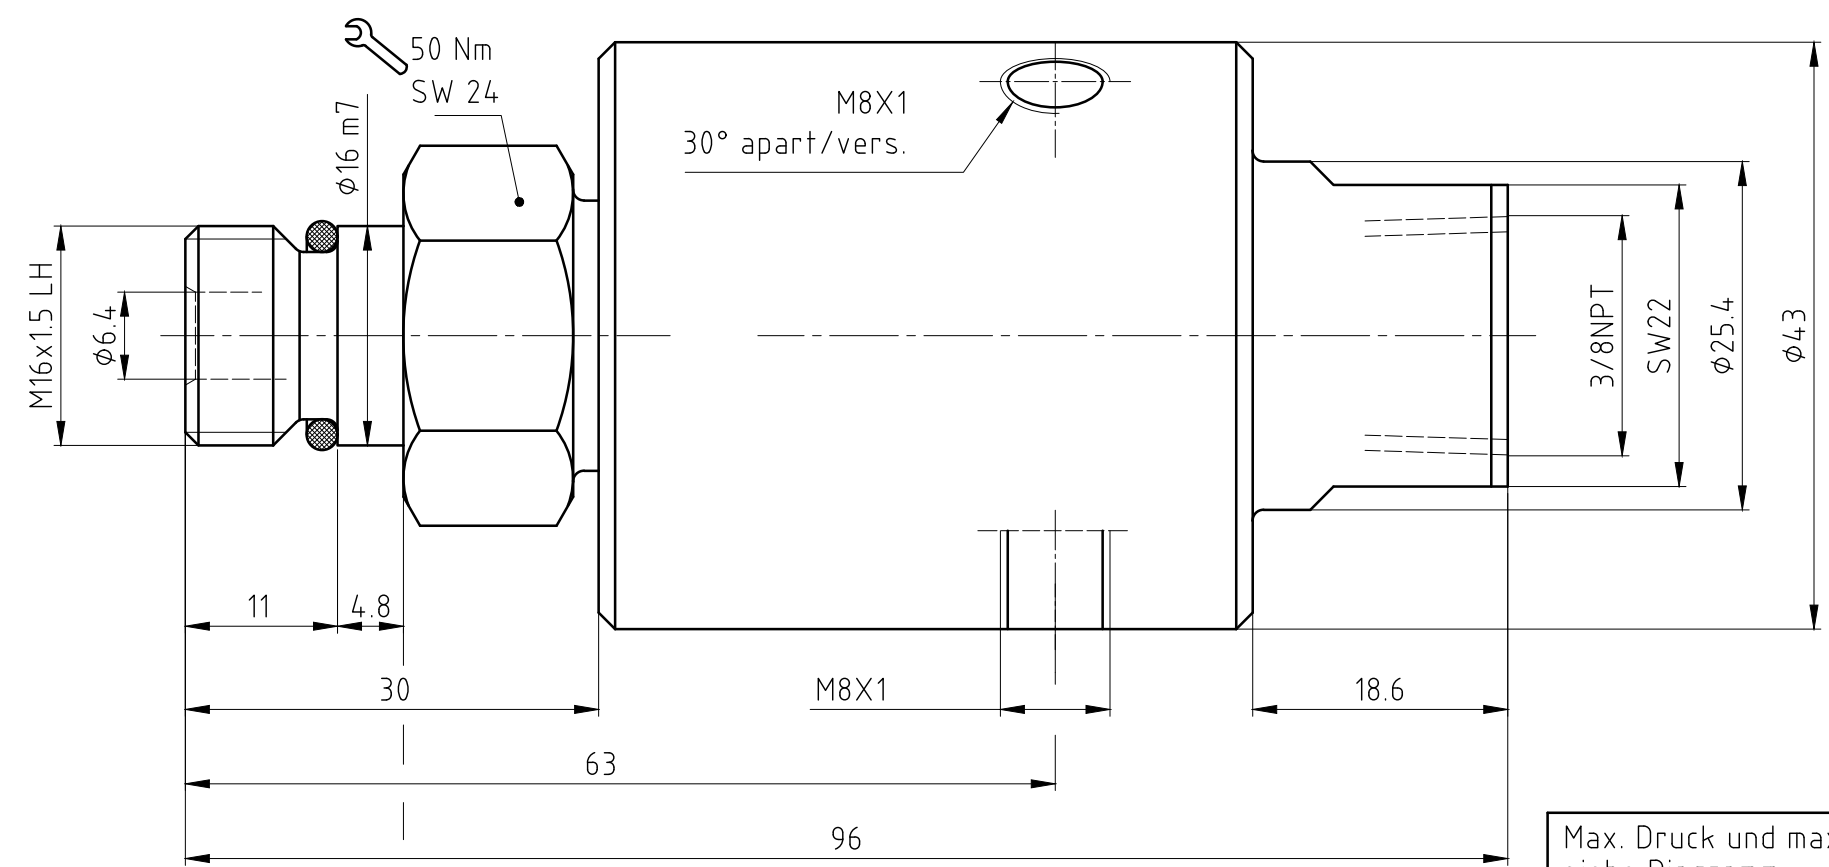

Max. Druck und max. Drehzahl gleichzeitig sind zu vermeiden. Zuordnung siehe Diagramm.
 OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED. IF THE OPERATING CONDITIONS ARE CLOSE TO THESE LIMITS, LOOK ON THE DIAGRAM.

Spindelende des Kunden
 CUSTOMER'S SPINDLE END

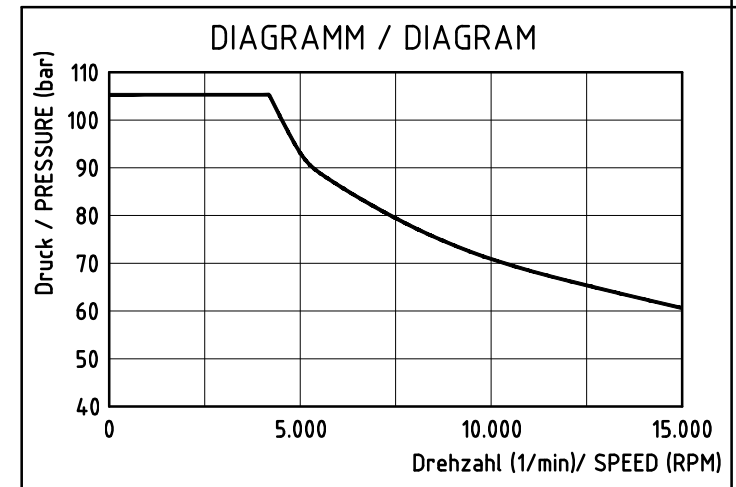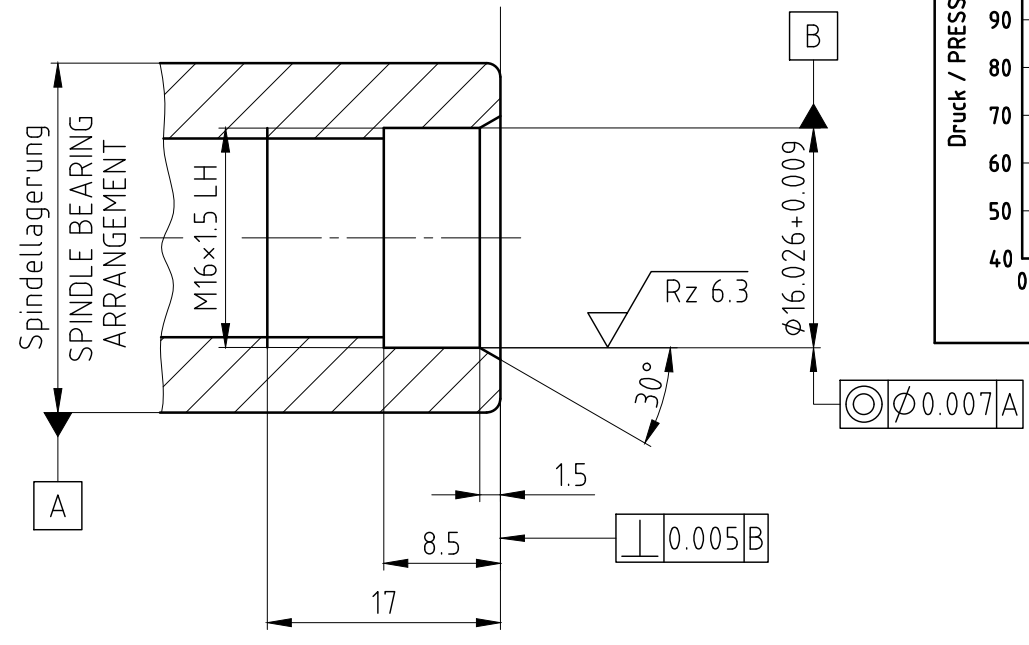

OPERATING DATA / Betriebsdaten		
MEDIA/Medium	COOLANT	KSS
p max.	1500 PSI	105 bar
n max.	15000 RPM	15000 1/min
t max.	160 °F	70 °C
Q max.	4 GPM	15 l/min
FILTRATION/Filterung	60 µm	60 µm

		PROJECTION:	SCALE: 2:1	Z:\UNIONS\
			MATERIAL: INTERFACE CONTROL DRAWING	
		DATE	NAME	TITLE:
		DRN. 13.03.2006	Ch. Wolf	DEUBLIN ROTATING UNION
		ENGR. 13.03.2006	F. Dahl	DEUBLIN Drehdurchführung
		APPD.		
b	Updated Border	054624	01/20	RM
a	NO DRY RUN	06041	02.03.06	FD
ISSUE/MODIFICATION		ECO	DATE	SIGN
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE				NO. 1101-338-259
				SHEET A3