


NOTES:

- 1 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1116-052-143.
- 2 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.  
IF OPERATING CONDITIONS ARE MARGINAL, PLEASE CONSULT DEUBLIN ENGINEERING.
- 3 - RECOMMENDED FILTRATION IS 25 MICRONS.
- 4 - DO NOT RUN DRY.

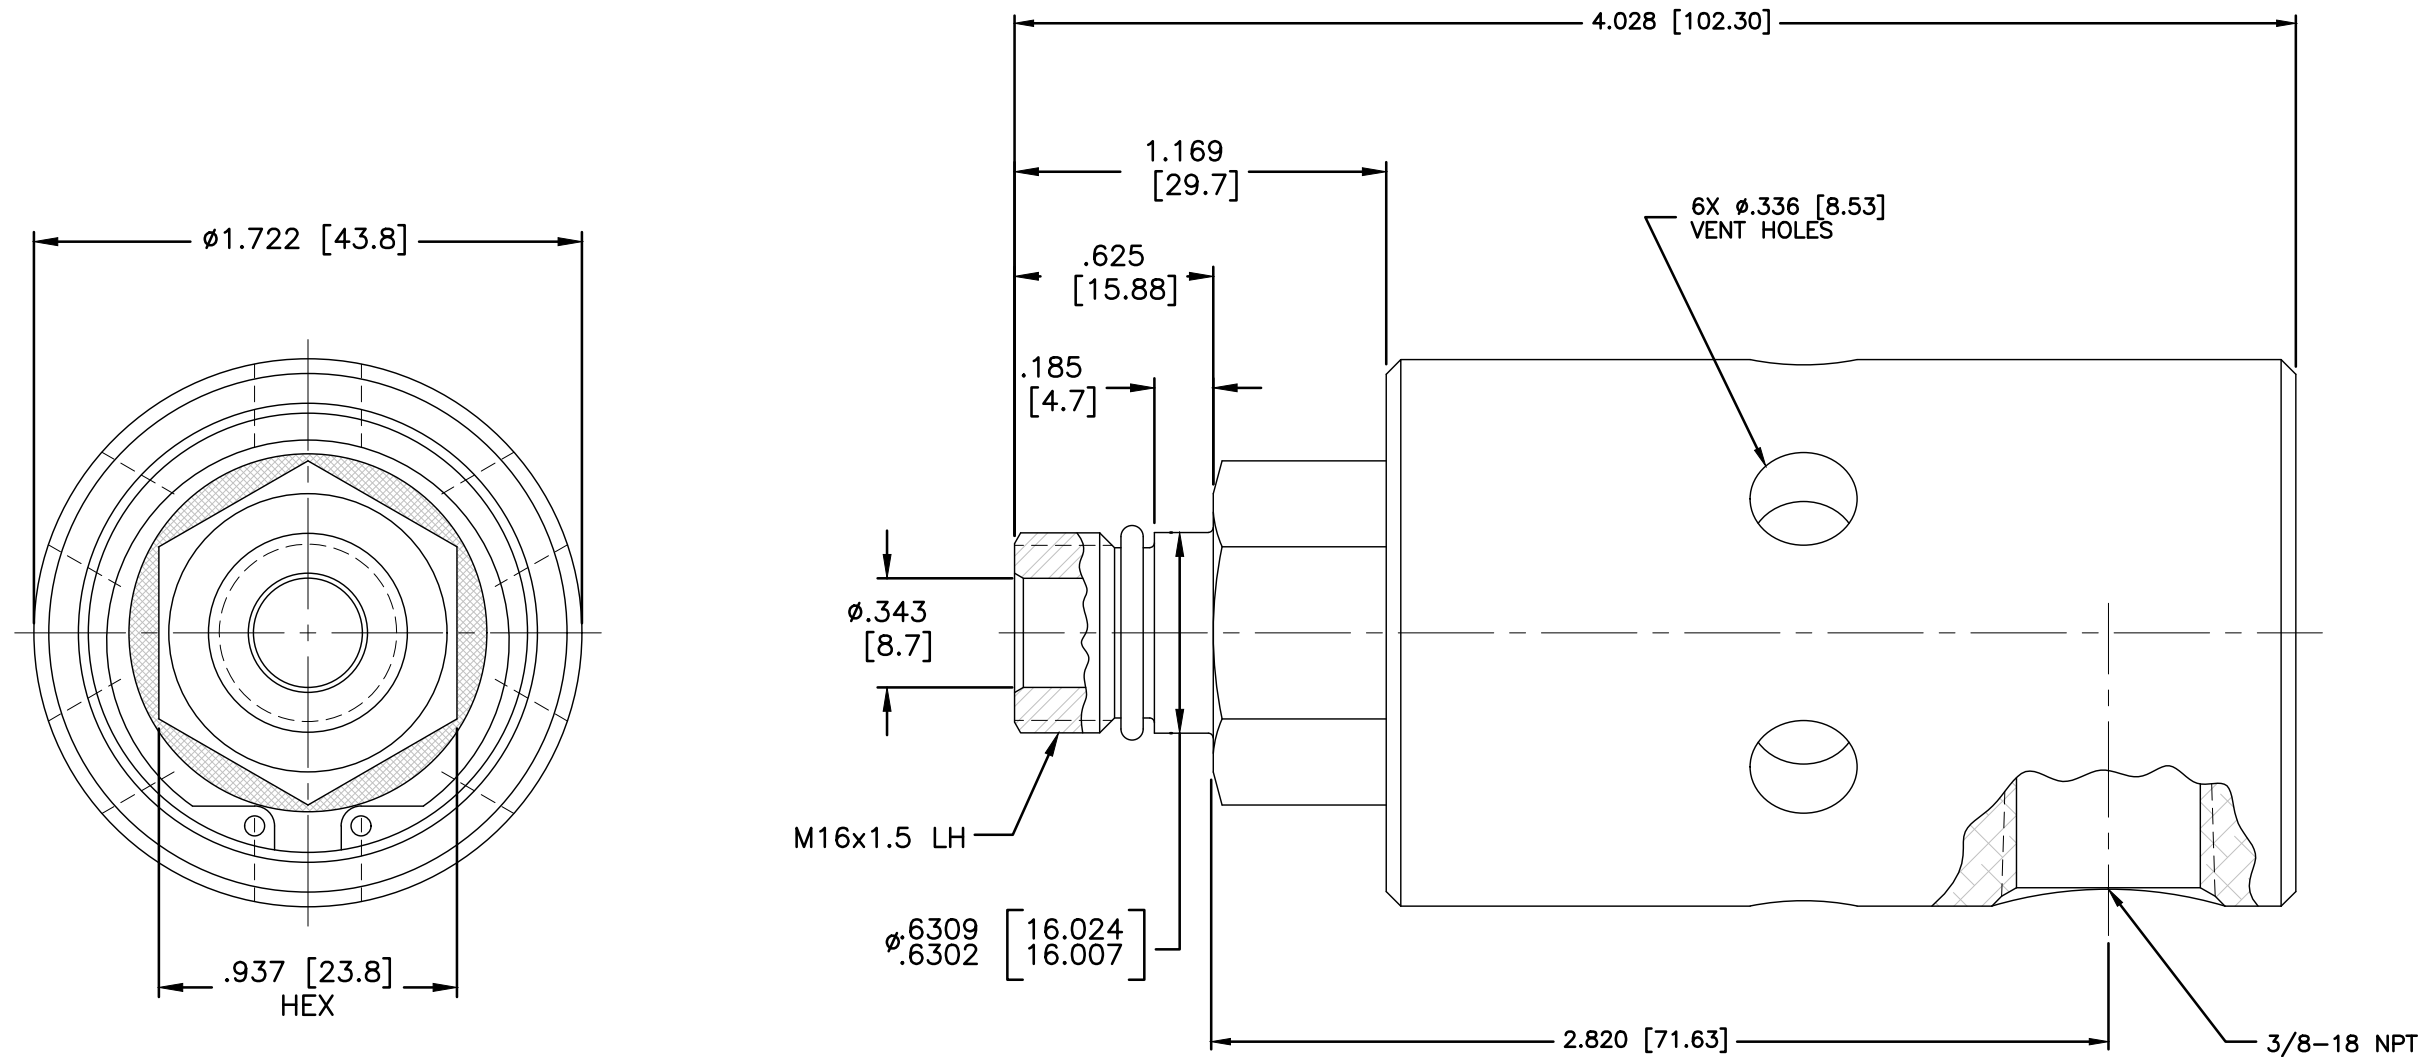

OPERATING DATA		
MEDIA	COOLANT	
MAX COOLANT PRESSURE	1000 PSI	70 bar
MAX SPEED	10,000 RPM	10,000/min
MAX FLOW RATE	13.8 GPM	50 L/min
MAX TEMPERATURE	250°F	121°C

CONFIDENTIAL  
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF THE DEUBLIN COMPANY.

				EQUIPMENT REF:		SCALE	2.5:1	DWG SIZE	C
						DRN	LG	09/29/03	
						ENGR			
						APPD			
				ASSY/TEST FIXTURES REQUIRED:		UNLESS OTHERWISE SPECIFIED TOLERANCES ±.010. DIMENSIONS IN [ ] ARE IN MILLIMETERS.			
						TITLE: INTERFACE CONTROL DRAWING FOR DEUBLIN UNION 1116-052-143			
						NO. 1116-052-143			
LET.	REVISION	ECO	DATE	SIGN					



TITLE: INTERFACE CONTROL DRAWING FOR DEUBLIN UNION 1116-052-143  
NO. 1116-052-143  
C.A.D. DRAWING