


NOTES:

- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.  
IF OPERATING CONDITIONS ARE MARGINAL, PLEASE CONSULT DEUBLIN ENGINEERING.
- 2 - RECOMMENDED FILTRATION IS 25 MICRONS.
- 3 - DO NOT RUN DRY.

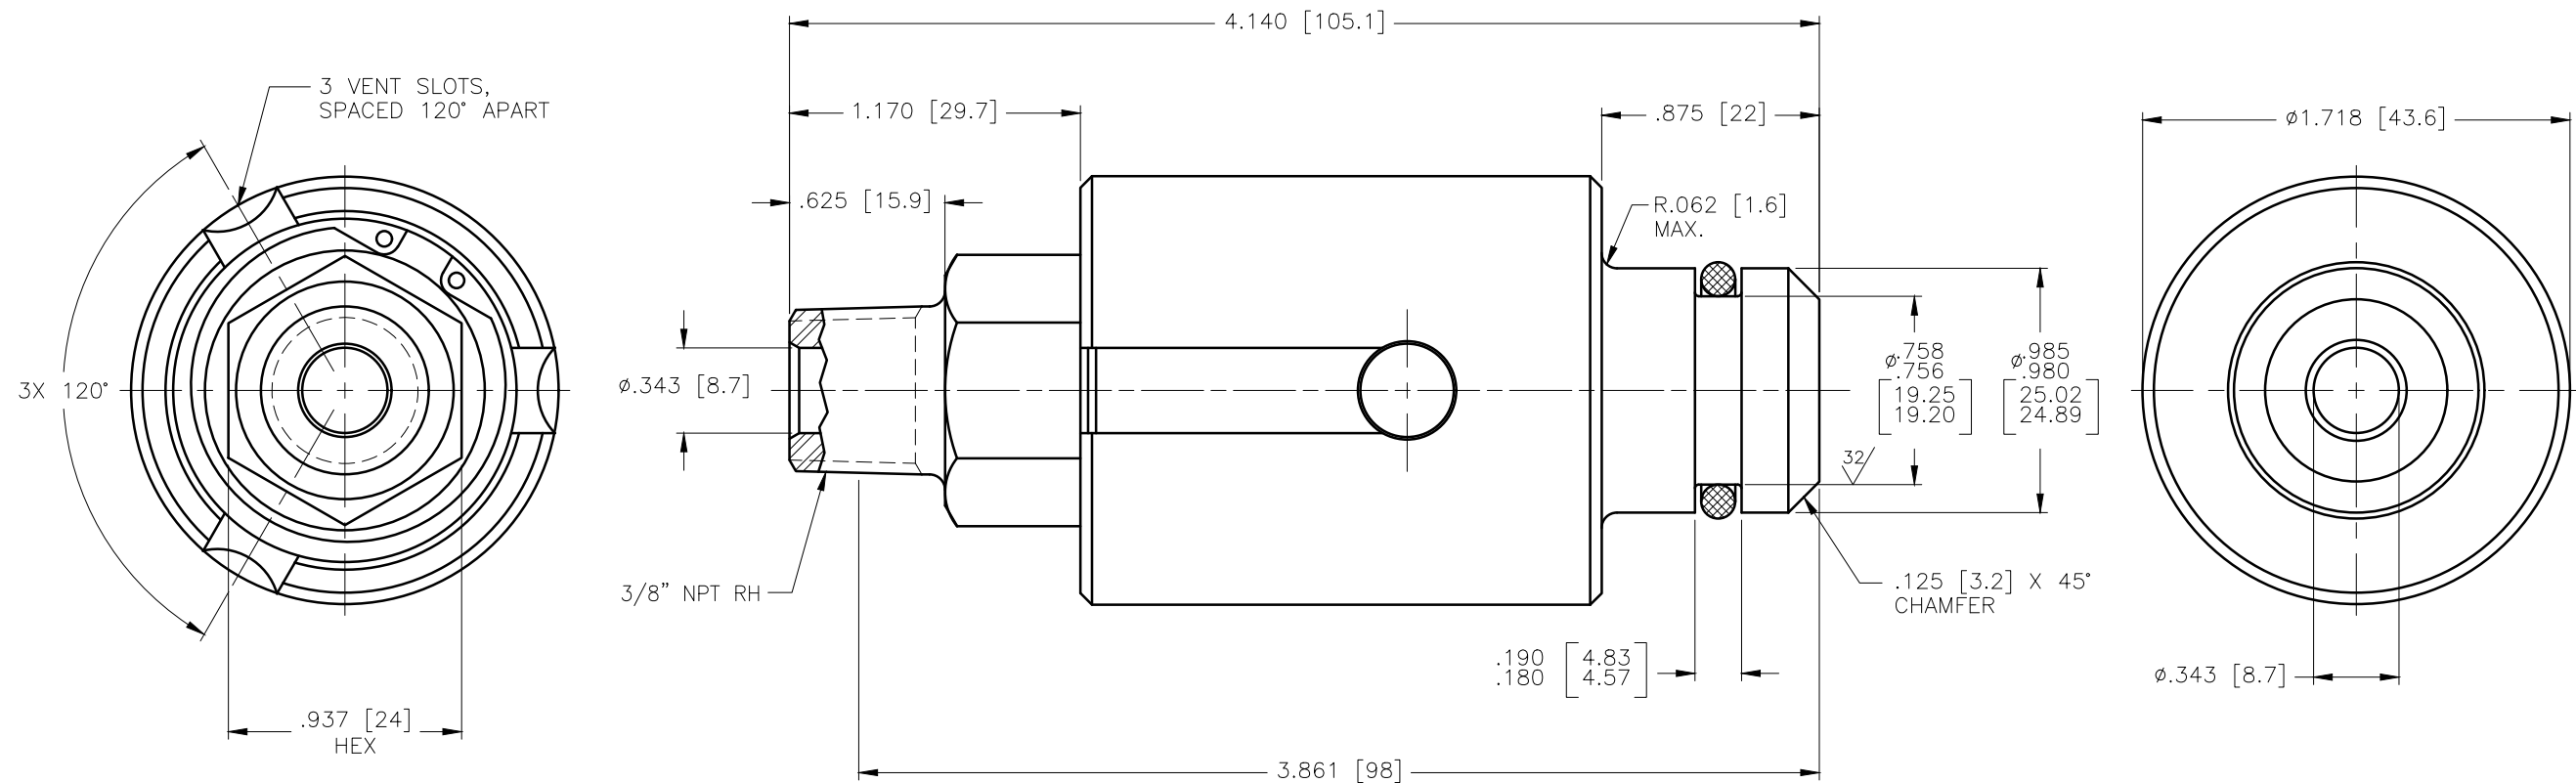

OPERATING DATA		
MEDIA	COOLANT	
MAX COOLANT PRESSURE	1000 PSI	70 bar
MAX SPEED	3,500 RPM	3,500/min (A)
MAX FLOW RATE	13.8 GPM	50 L/min
MAX TEMPERATURE	250°F	121°C

**CONFIDENTIAL**  
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



TITLE: INTERFACE CONTROL  
 DRAWING FOR DEUBLIN  
 UNION 1116-319-248

DWG. NO. 1116-319-248  
 C.A.D. DRAWING

SCALE	2:1	DWG SIZE	C
DRN	LG	10/17/05	
ENGR	LG	10/17/05	
APPD			
PART NO.	1116-319-248		
CUSTOMER			
LET.	REVISION	ECO	DATE SIGN
A	REVISED OPERATING DATA	046660	04/18 NR

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE  
 DIMENSIONS IN [ ] ARE IN MILLIMETERS.