NOTES:

1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER 357-000-074.

2 – PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

## OPERATING DATA:

WATER SERVICE
150 PSI (10bar) MAX. WATER PRESSURE
3000 RPM (3000/min) MAX. SPEED
200°F (93°C) MAX. TEMPERATURE

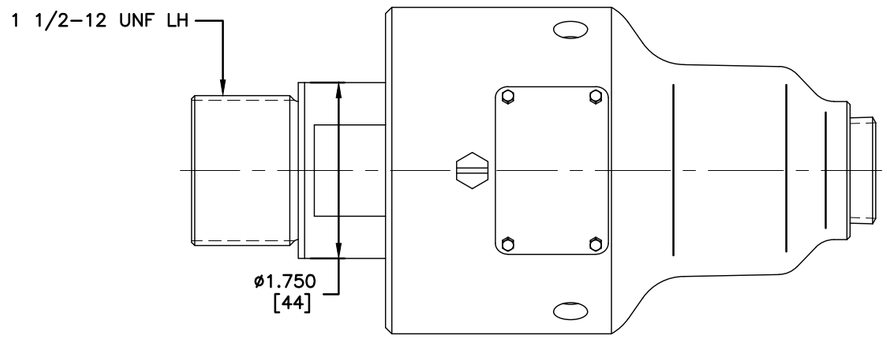


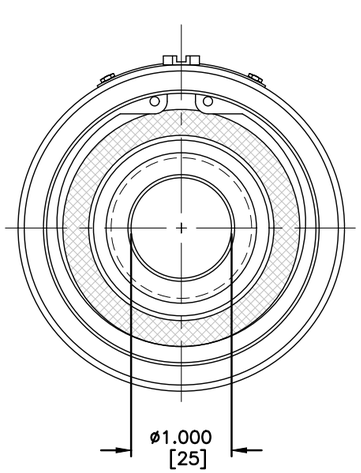


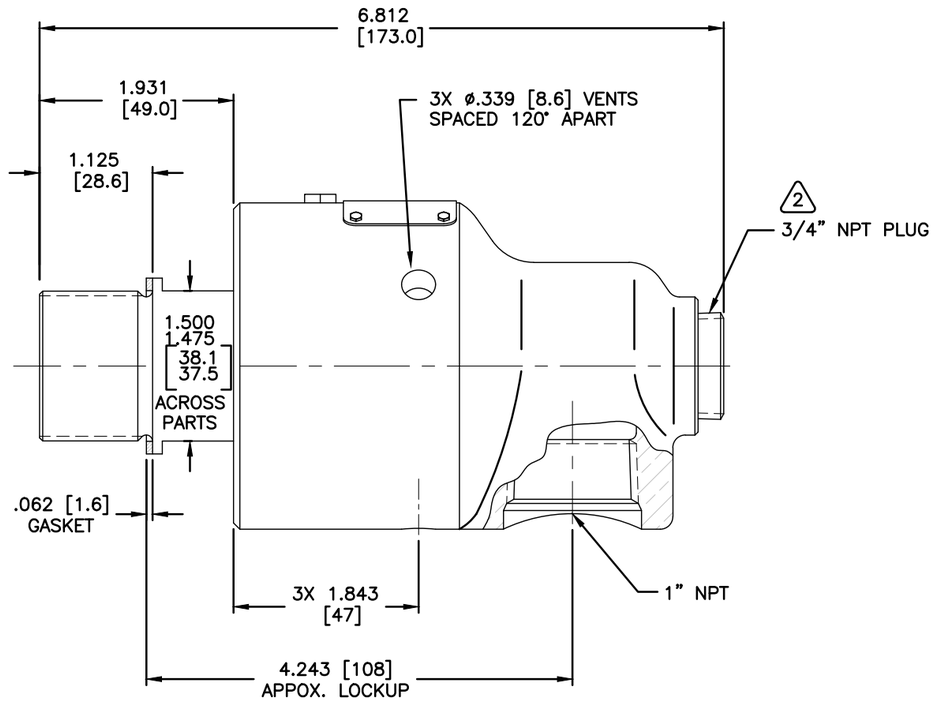


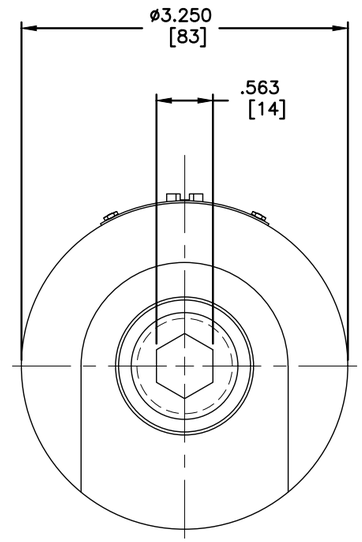


CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF THE DEUBLIN COMPANY.

| LET. | REVISION | ECO | DATE | SIGN |
|---|---|---|---|---|
| | | | | |

EQUIPMENT REF:

ASSY/TEST FIXTURES REQUIRED:

UNLESS OTHERWISE SPECIFIED TOLERANCES ±.010.
DIMENSIONS IN [ ] ARE IN MILLIMETERS.

| | | |
|---|---|---|
| SCALE | FULL | DWG SIZE C |
| DRN | LMG | 11/08/01 |
| ENGR | | |
| APPD | | |

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL DRAWING FOR UNION 357-000-074

NO. 357-000-074-IC C.A.D DRAWING