
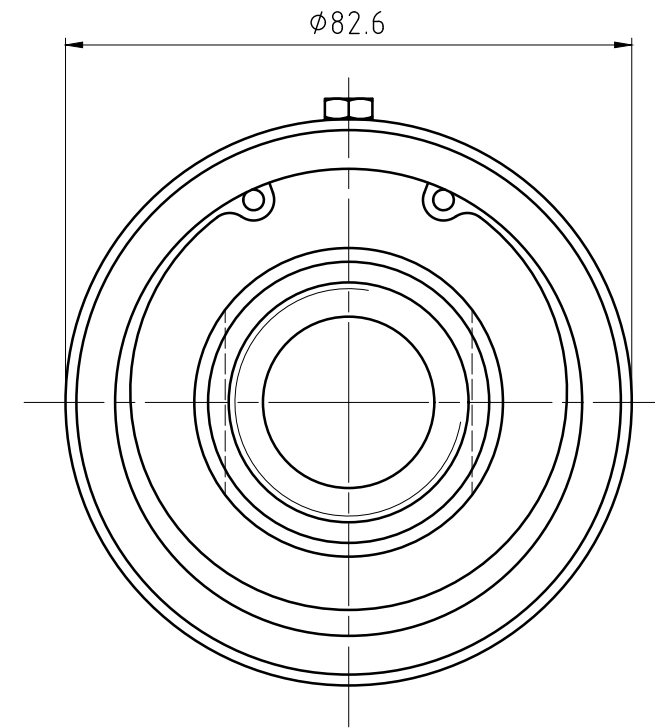


NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM  
FOR INSTRUCTION MANUAL: 040-550


 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,  
TIGHTEN BEFORE USE.

CONFIDENTIAL  
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY  
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,  
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT  
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR  
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

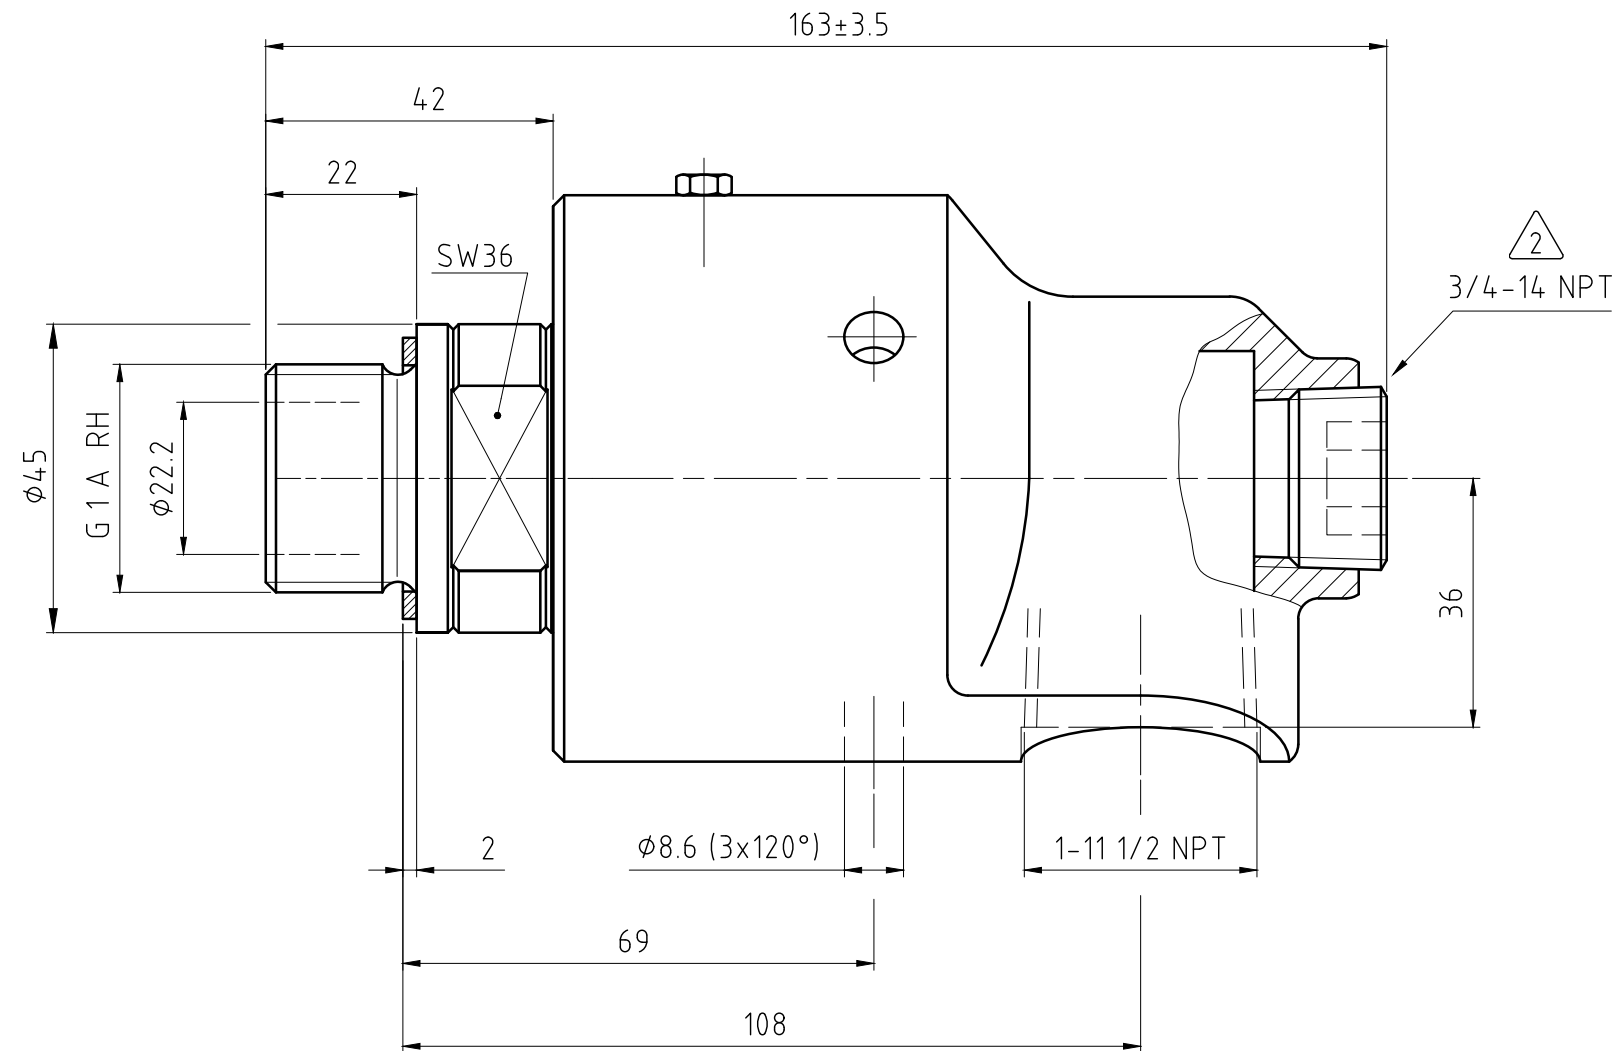

OPERATING DATA	
MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	3000 min <sup>-1</sup>
TEMPERATURE MAX.	90 °C
DRY RUN (WITHOUT ANY MEDIA)	NO

(A)



SCALE: 1:1  
MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME
DRN. 27.04.2016	HS
ENGR. 27.04.2016	CW
APPD.	

TITLE: DEUBLIN ROTATING UNION  
DEUBLIN Drehdurchführung

NO. 357-050-222

SHEET A3

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN
A	SEE ECO	03766109	05.06	HS