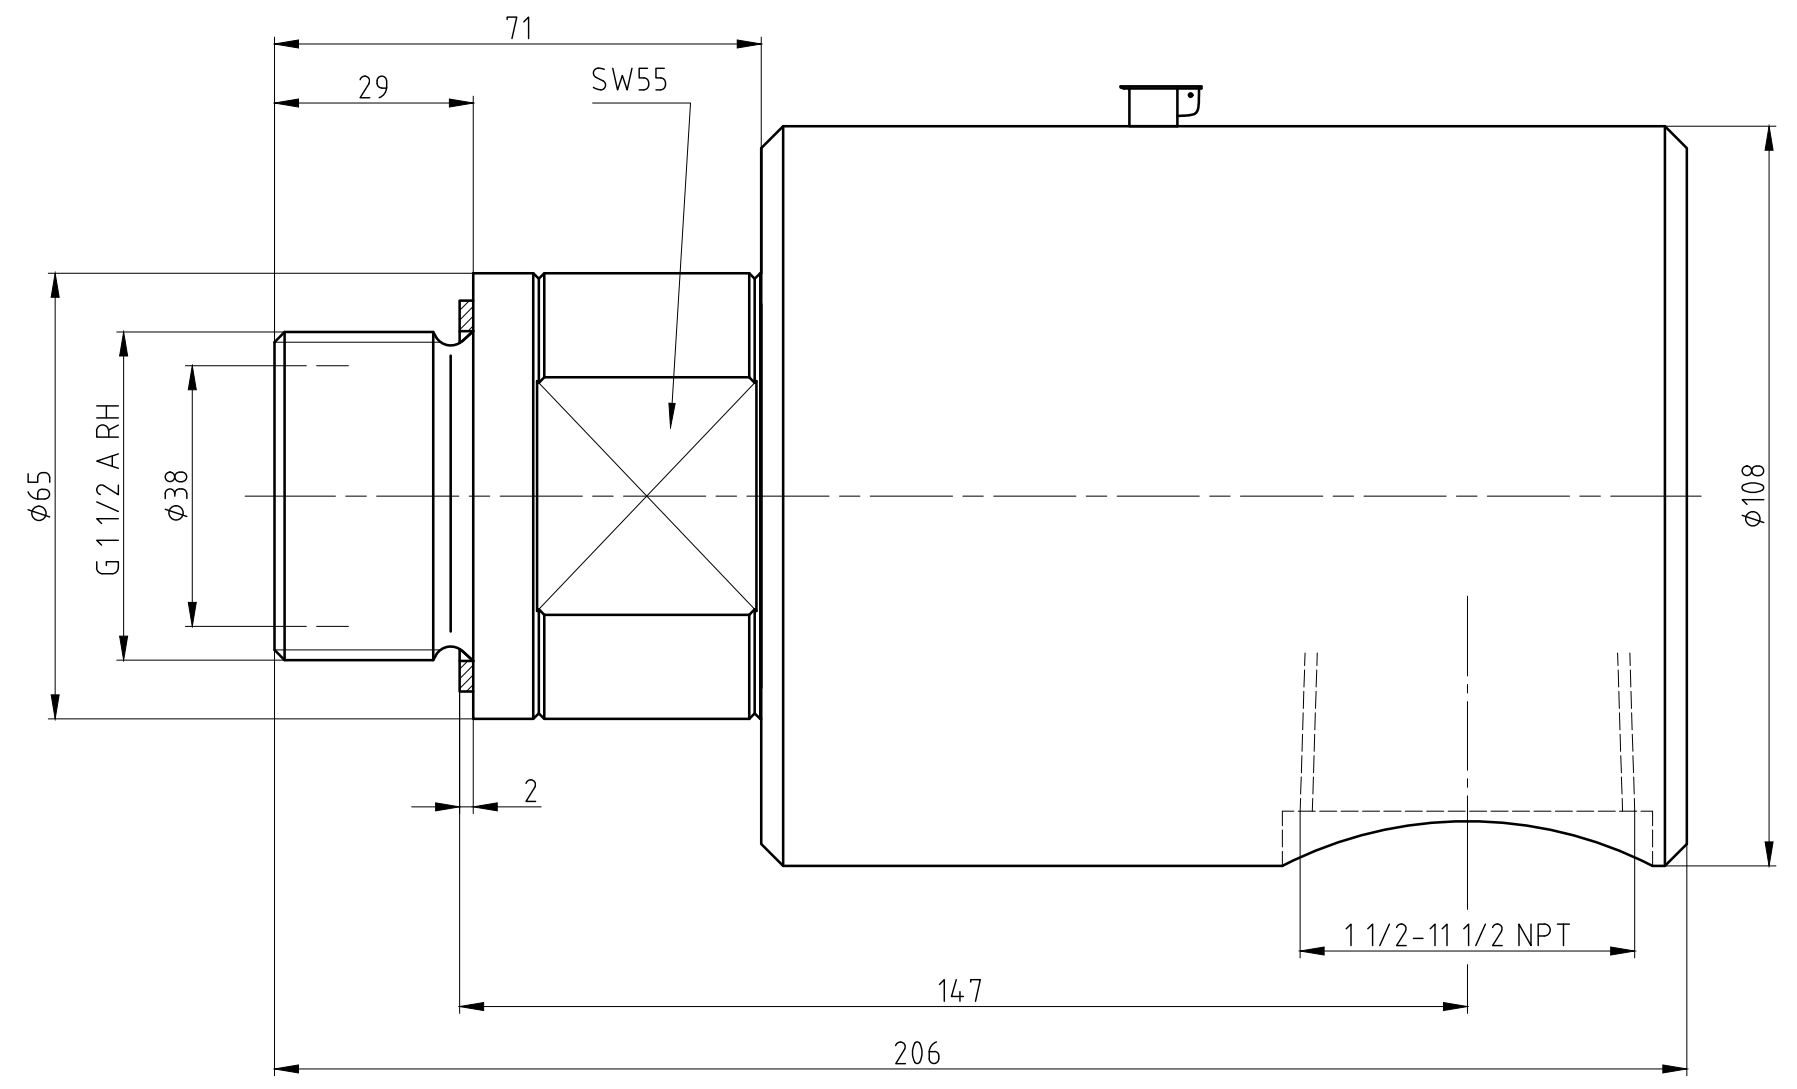




NOTES:

1 - USE INSTRUCTION MANUAL 40-555

CONFIDENTIAL  
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY  
 INFORMATION OF DEUBLIN COMPANY. COPYING, USE,  
 TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT  
 TO THE TERMS AND CONDITIONS CONTAINED IN YOUR  
 AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



OPERATING DATA	
MEDIA	HYDRAULIC OIL / COMPRESSED AIR
MAX. PRESSURE HYDRAULIK OIL	50 bar
MAX. PRESSURE COMPRESSED AIR	10 bar
MAX. VACUUM	6,7 kPa
MAX. TEMPERATURE	120 °C
MAX. SPEED	2500 1/min

 <b>DEUBLIN GmbH</b> D-65719 HOFHEIM-WALLAU, GERMANY	PROJECTION:	SCALE: 1:1	INTERFACE CONTROL DRAWING  TITLE: <b>DEUBLIN UNION</b> <b>Deublin Einführung</b>
		DATE: 10.07.2008 NAME: MH ENGR. 10.07.08 HJH APPD.	
ISSUE MODIFICATION ECO DATE SIGN	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		SHEET A3