CONFIDENTIAL
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

NOTES:

1. PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
2. CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM FOR INSTRUCTION MANUAL: 040-550
3. GASKET THICKNESS.

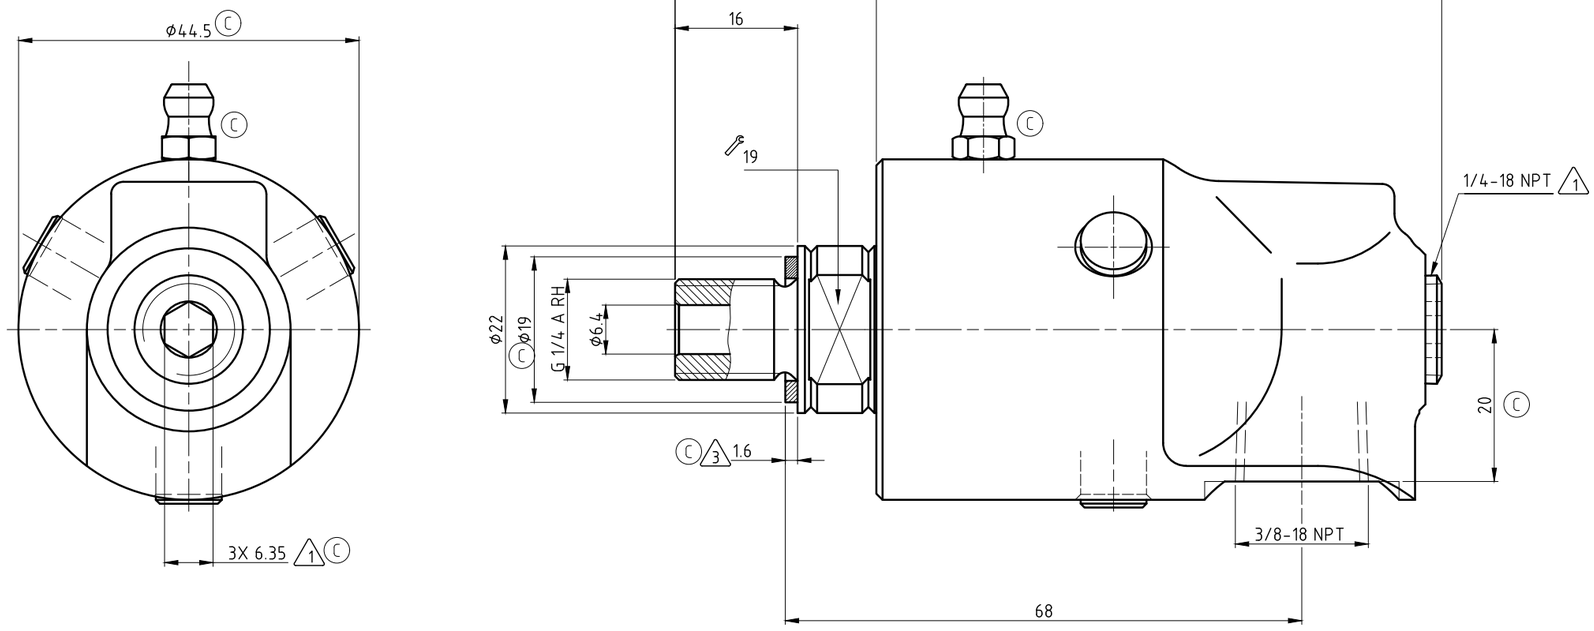

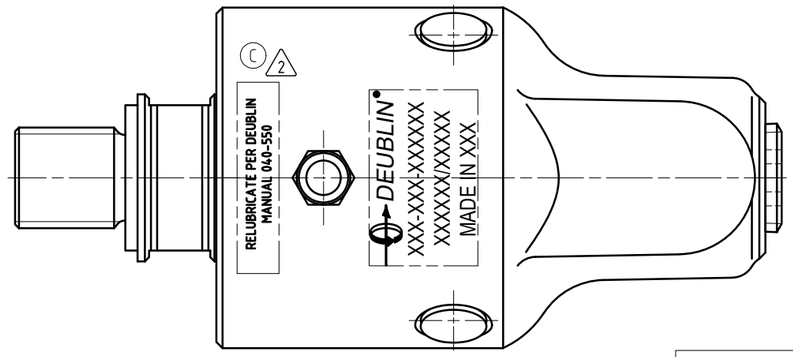

C

OPERATING DATA			
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	THERMAL OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	3500 min^{-1}		
TEMPERATURE MAX.	120 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		
RECOMMENDED FILTRATION	60 micron		

DEUBLIN
HOERBIGER Rotary Solutions

PROJECTION:

ISSUE	MODIFICATION	ECO	DATE	SIGN
C	SEE ECO	057230	08/20	MTS
B	REVISED	026872	01/14	FD
A	RELEASE/UPDATE TO MS	022721	04/13	FD

	DATE	NAME
DRN.	08.04.2013	FD
ENGR.	08.04.2013	CW
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SCALE: 2:1
MATERIAL: INTERFACE CONTROL DRAWING
TITLE: DEUBLIN UNION
NO. 57-013-677
SHEET A2