CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550

2 - PIPE SUPPLIED BY CUSTOMER.

3 - KEYWAY ACCORDING TO DIN 6885-A-12x8x27.5.

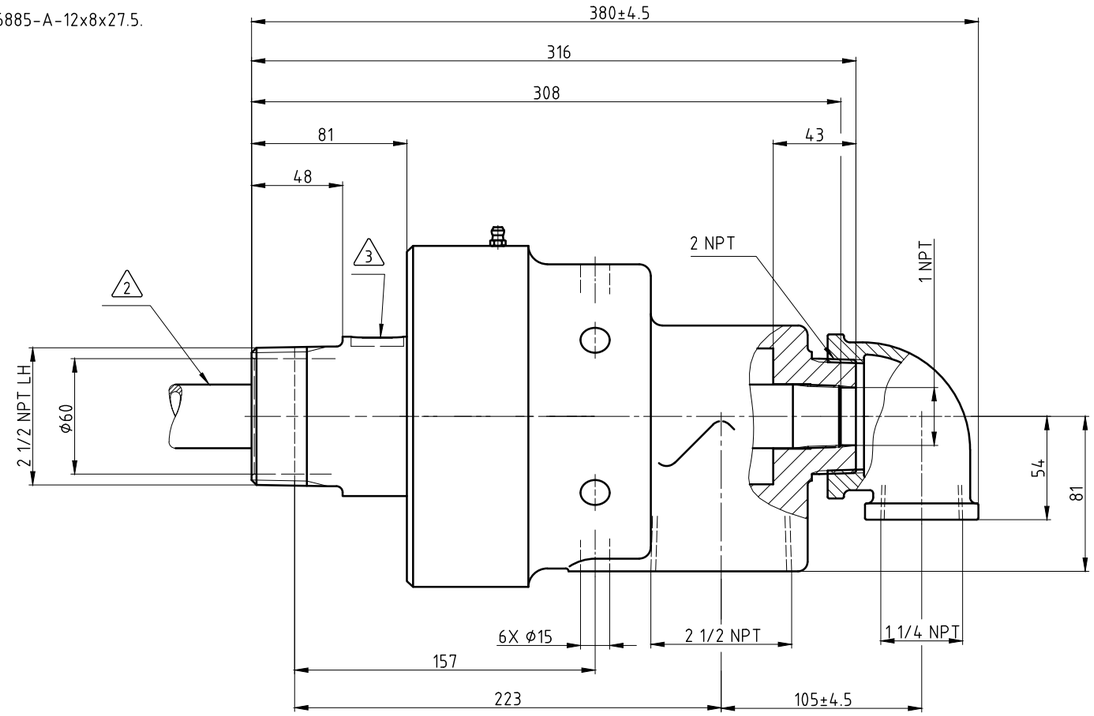

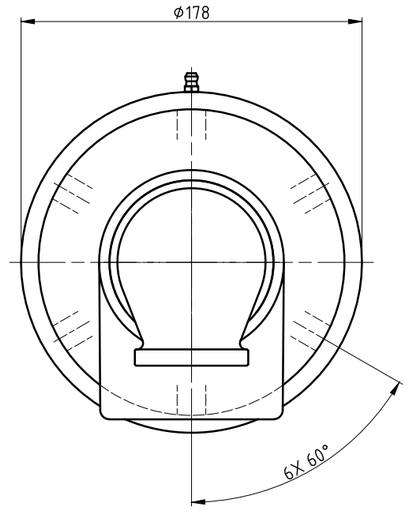

OPERATING DATA		
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)
PRESSURE MAX.	14 bar	1 bar
SPEED MAX.	750 min^{-1}	
TEMPERATURE MAX.	120 °C	
DRY RUN (WITHOUT ANY MEDIA)	NO	

DEUBLIN®
Engineered for Performance

PROJECTION:

SCALE: 1:2

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO. 755-700-415117

SHEET A2

	DATE	NAME
DRN.	12.06.2015	MV
ENGR.	15.06.2015	CW
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN