




Rotating Unions

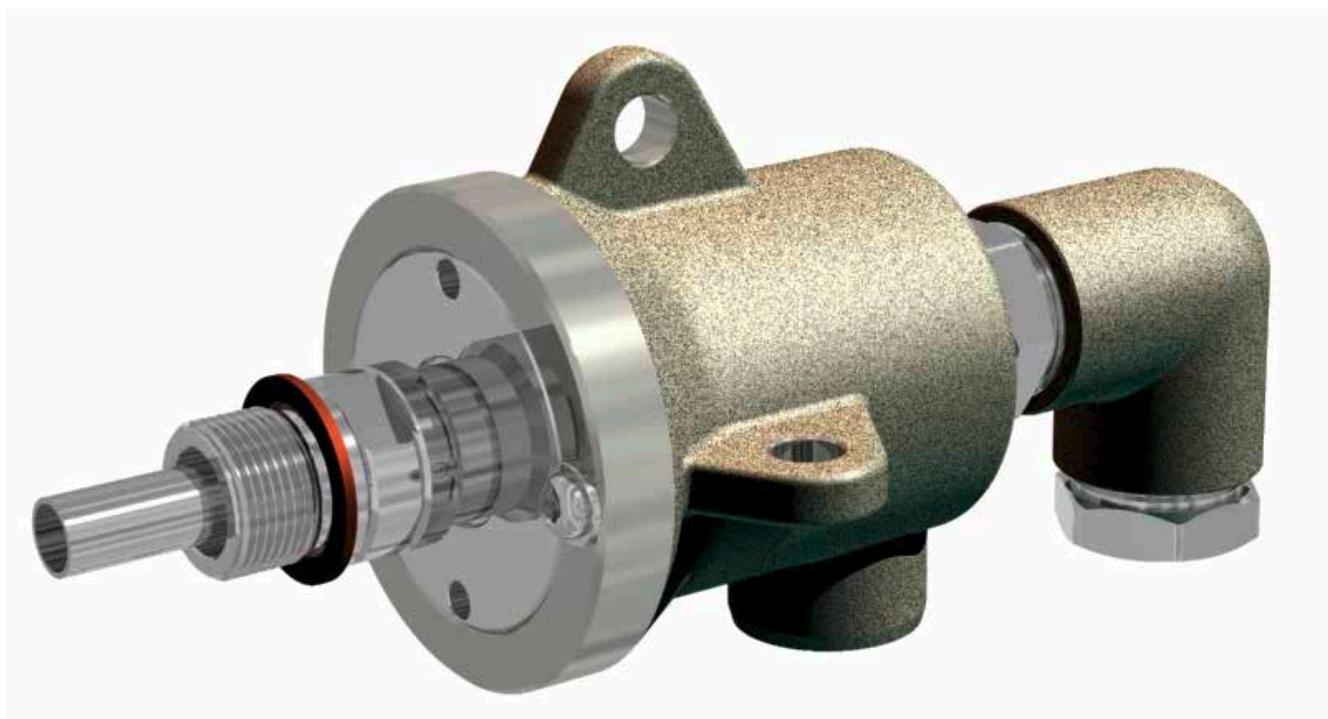

Series

9000

for steam / thermal oil.

Content

1	For your Safety	3
1.1	Intended Use	3
1.1.1	Application single passage version (Mono)	3
1.1.2	Application two-way version (Duo) Steam	4
1.2	Misuse	4
1.3	Safety Instructions	5
1.3.1	Hazards due to hot surfaces	5
1.3.2	Hazards due to incorrect hoses	5
1.3.3	Hazards due to the media	5
1.3.4	Hazards due to faulty installation	5
1.4	Structure of Pictograms	6
2	Information as to this Manual	6
3	Information on the Name Plate	6
4	Information on the Design	7
4.1	Filtering of the Medium	7
4.2	Floor space with wear	7
4.3	Connecting Options of the Rotating Union at the Machine Shaft	8
4.4	Options of Hose Installation	8
4.4.1	Connection of hose to the rotating union	9
4.5	Using a locking element	10
5	Installation	10
6	Information on the Operation	10
7	Storage	11
8	Maintenance	11
8.1	Maintenance Intervals	11
8.2	Daily Inspection	11
8.2.1	Monitoring wear	12
8.3	Maintenance	13
9	Trouble Shooting	13
9.1	Potential Causes for Errors and their Elimination	13
9.2	Pack Rotating Union for Transport	14
10	Disposal	15
10.1	Dispose of Packaging	15
10.2	Dispose of Rotating Union	15
11	Spare Parts	15

1 For your Safety

This chapter provides information on the safe handling of *DEUBLIN* rotating unions.

- For your own safety and the safety of other people read this operating manual carefully and completely prior to working on or with *DEUBLIN* rotating unions.
- This operating manual exclusively describes the rotating unions of the manufacturer *DEUBLIN*. In the further description/explanation the name “*DEUBLIN*” is left out for a better readability.
- This operating manual is a material part of the specified rotating unions. The operator is responsible for the personnel to take note of this manual.
- Always use the latest version of the operating manual, available under www.deublin.eu.
- The operator of the rotating unions shall not make any modifications or attachments to and retrofitting of the rotating union without the manufacturer’s consent.
- Please follow the additional instruction “Installation” for a secure and correct installation of the rotating union. The installation instruction is included with the delivered union.
- Request the model specific installation drawing for your rotating union from *DEUBLIN* to guarantee safe installation and operation.

1.1 Intended Use

The rotating unions of the series 9000 supply the following media: steam or thermal oil

Series	Model	Max. Temperature (°C) *	Max. Pressure (bar)	Max. Speed (RPM)	Medium	
					Steam	Thermal oil
9000	9075-9200	185°	10	400	•	
9000	9075-9150	230°	7	400		•
9000	9200	200°	7	400		•

* For applications with higher temperatures please ask *DEUBLIN*.

The rotating unions referred to are designed for non-potentially explosive environments and non-combustible media.

Details on the operating range of the rotating unions are provided in the catalogue and/or the model-specific installation drawing.

The rotating unions of the series 9000 can be used as one-way or two-way version depending on the type of connection.

1.1.1 Application single passage version (Mono)

For the single passage version, models are available which can be fitted to the end of the machine shaft.


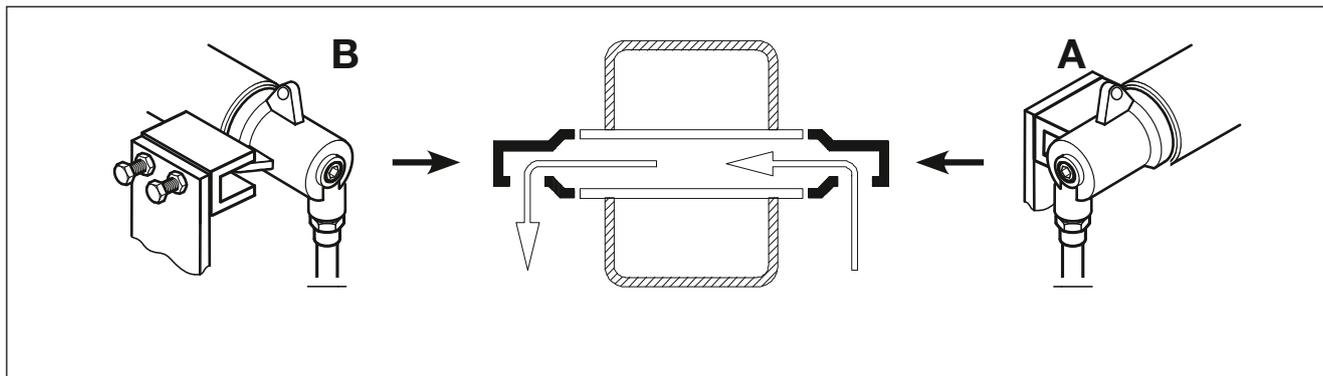


Fig. 1: Schematic diagram single passage version (Mono – externally mounted)

One single passage version of the rotating union is mounted at each of the two ends of the machine shaft. The rotating union **(A)** conveys the media flow into the machine shaft. The rotating union **(B)** conveys the media flow into the piping system of the machine.

1.1.2 Application two-way version (Duo) Steam

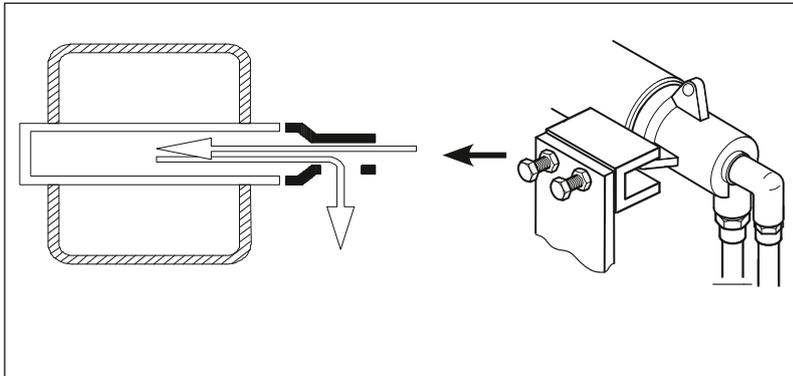

The rotating unions of the 9000 series are also available as two-way model (Duo).

The steam is fed into the machine shaft through the module housing and the outer annular channel. The condensate is taken **out** by the same rotating union through the siphon pipe and elbow and hose and fed into the machine's piping system.

Fig. 2: Schematic diagram two-way version (Duo)

The two-way rotating union is fitted with an axial connection and elbow. Thermal oil passes through the elbow and into the machine shaft through a supply tube. The thermal oil also returns via the same rotating union, elbow and hose fed into the machine's piping system.

The flow direction can be reversed depending on the system's requirements.

1.2 Misuse

This chapter provides information on known misuse of rotating unions of the 9000 series. The rotating unions are not suitable for the areas and applications described herein. Use in such areas or for such applications constitutes a misuse endangering people and machines and is therefore prohibited.

Prohibition for the following areas:

- Potentially explosive areas**
The rotating unions of the 9000 series shall not be used in potentially explosive areas, as they are not approved for the requirements in potentially explosive areas. Operation in such areas may cause explosions.
- Food**
Food, cleaning and disinfectant residues cannot be removed from the rotating unions. People may suffer poisoning.

Prohibition for the following applications:

- Conveying of combustible media or hydrocarbons**
Combustible media or hydrocarbons may ignite or cause explosions.
Exception: Thermal oil within the admissible temperature range. Please observe the safety data sheet of the used thermal oil.
- Connection to a piping system with excessive pressure**
If excessive pressure is applied to the rotating unions, supply pipes can come off and cause personal injury or property damage.
- Operation without lubrication**
Dry operation (without medium) of the rotating union causes damage to the spherical seals.
- Connection to fixed pipes**
If connection is via fixed pipes, the rotating unions may leak and the ball bearings may get damaged.

Media temperatures

Media temperature must not exceed that stated in the current *DEUBLIN* Catalogue. If temperature is exceeded this could result in leaky rotating unions and personal injury or property damage.

 Application in ambient temperatures/with media temperatures below 3 °C

Rotating unions may be damaged if they are operated at temperatures (ambient or media) below 3 °C.

 Use of hydraulic oils

If you are using the rotating union for hydraulic oils, then the rotating union will be damaged and hydraulic oil could spurt out. People could be injured.

 Operation at the maximum speed and with maximum pressure

Speed and pressure must be adjusted to each another so that the rotating unions are not damaged or fail prematurely (see model-specific installation drawing).

This list is not comprehensive and will be updated with results from product observation.

1.3 Safety Instructions

This chapter provides information on the hazards from rotating unions.

1.3.1 Hazards due to hot surfaces

The rotating unions are heated by the temperature of the medium. Skin contact with heated rotating unions can cause injuries.

- Use safety gloves and PPE (Personal Protective Equipment) protecting against heat when handling the rotating union.
- Attach a clearly visible danger sign visibly on/next to the rotating union in order to warn of danger.

1.3.2 Hazards due to incorrect hoses

For the connection of the rotating union to the machine, you have to choose appropriate hoses for the respective medium, which meet, the specifications for the application.

If you use incorrect hoses, they may become porous or burst. This can cause personal injury and/or property damage to components of the machine.

- In case of the media, steam or thermal oil, use hoses, which are suitable for the maximum system pressure of the machine and the maximum temperature of the media.

1.3.3 Hazards due to the media

When working on the rotating union, injuries can be caused by skin or eye contact with the media.

- Observe the safety instructions for the flow media. Observe the COSHH Safety Data Sheet for the flow media.

1.3.4 Hazards due to faulty installation

If the rotating unions are installed incorrectly, hoses and connections may become leaky. The medium can escape. Depending on the medium, personal injury or property damage to the components of the machine may occur.

- Before installing the rotating union ensure that no feed pressure and no residual pressure is applied to the pipeline system of the machine.
 - Please follow the additional instruction "Installation" for a secure and correct installation of the rotating union. The installation instruction is included with the delivered union.
- Install the rotating union on the machine using hoses only, in order to avoid stress on the rotating union.
- Install the hoses free from stress.



- Install the hoses to the rotating union prior to mounting it at the machine shaft.
- Install the anti-rotation element on the rotating union, tension free.

1.4 Structure of Pictograms

This chapter provides information on the meaning of the pictograms used in the manual.



Warning

Warning

Potentially dangerous situation, which may result in death or serious injury.



Note

Note

Potentially harmful situation in which the product or surrounding objects can be damaged.



Info

Application notes

and other useful information.

2 Information as to this Manual

The copyright as to this manual remains with *DEUBLIN*. Subject to changes!

- You can download the latest version of this manual under www.deublin.eu.
- Always use the latest version of the operating manual.

3 Information on the Name Plate



Model number

DEUBLIN's internal identification / date of manufacture

MADE IN <<country of manufacture>>

Fig. 3: Name plate

The coding of the model number is described in the catalogue. The model number corresponds to the order number.



4 Information on the Design

This chapter provides information as to which items have to be observed in the design in order to have a positive effect on the service life of the rotating union.



Info

You can obtain the drawings of the rotating unions from *DEUBLIN* in order to integrate the rotating union in your drawing.

You will require the model-specific installation drawing of your rotating unions to implement it into your design and to operate the rotating unions in a safe manner.

The model-specific installation drawing of the respective rotating union contains e.g.:

- torque moments of the union
- technical data
- tolerances
- approved media

4.1 Filtering of the Medium

Unfiltered media with a particle size of more than 60 µm, increased wear of the rotating union.



Info

The larger the particles in the media, the higher the wear of the rotating union is. The higher the total of all particles (polluting load), the higher the wear is.

- Insert a filter in front of the rotating union which filters particles with a size of 60 µm and larger from the media.

4.2 Floor space with wear

The series 9000 rotating unions are equipped with carbon graphite seals. The length of the rotating union increases due to seal wear. With this the rotor is pushed out of the housing by spring force. This must be allowed for in the design and construction of the machine. The rotating unions must always be without stress. Stress can lead to the rotating unions leaking.



Warning

Risk of injury due to incorrect installation

If the rotating unions are under stress then the wearing of seals due to linear expansion cannot be counterbalanced. The rotating unions will leak once they have reached a degree of wear. Leaking steam or thermal oil could seriously injure people.

- Make sure that the rotating unions are always installed without stress.
- Please note the details on linear growth in the model specific installation drawing.



4.3 Connecting Options of the Rotating Union at the Machine Shaft

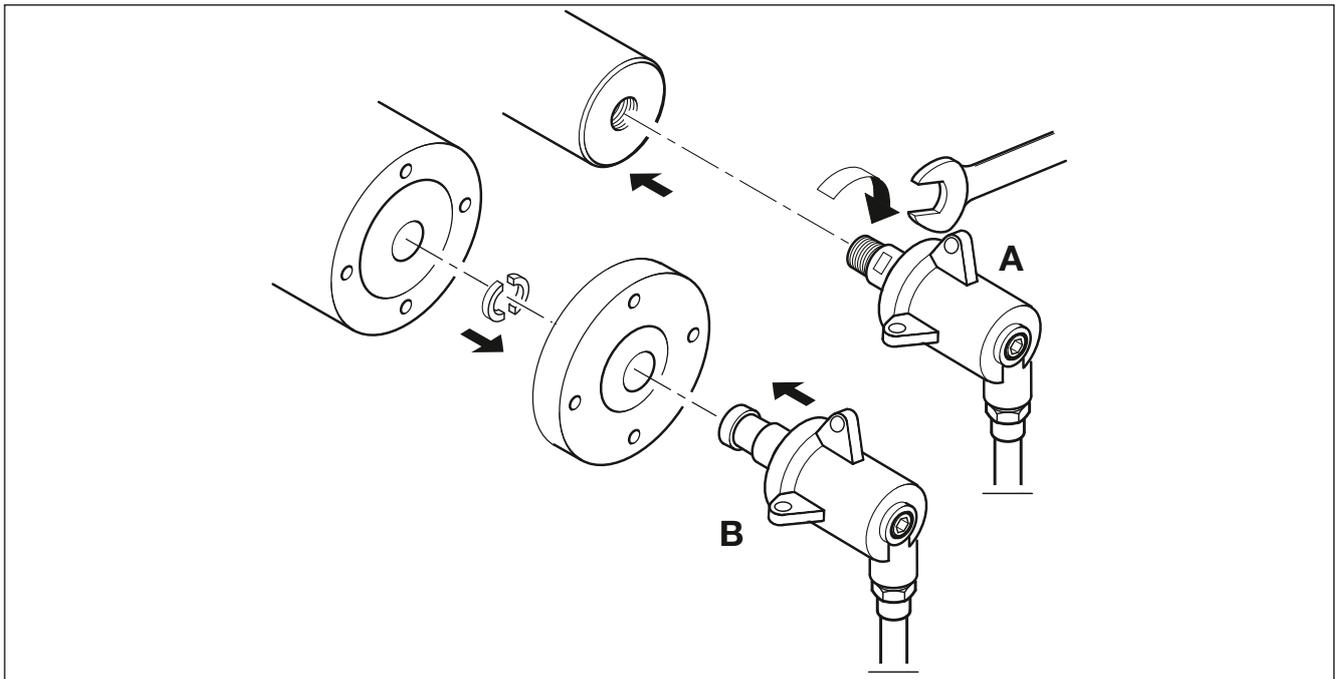


Fig. 4: Options for the installation on the machine shaft

The rotating unions are fixed to the machine shaft by the rotor. The following rotor versions are available:

- Version (A):**
The rotor is fitted via a thread on the end.
- Version (B):**
The rotor is fitted via a groove. The customer applies fixing components (e.g. flange and a split ring) to this groove.

The rotor forms the connection between the rotating union and shaft. For this reason it is important to design the shaft with great care and observe the specifications of the rotating unions model specific installation drawing. Deviations can lead to leaks and eccentric rotation of the rotating unions. The rotating unions can be horizontally installed onto the shaft.



Warning

Component damage due to incorrect installation

If the rotating unions are installed vertically with the rotor pointing upwards or downwards, this can lead to leakage.

- Only install the rotating unions horizontally.
- Please contact *DEUBLIN*, if you would like to install the rotating unions vertically.

4.4 Options of Hose Installation

The following examples show how to install the hoses to the rotating unions.

These connecting options ensure that the hoses do not transfer stress to the rotating unions when the machine shaft moves.

- Please pay attention to the chapter “1.3 Safety Instructions” regarding the design.

4.4.1 Connection of hose to the rotating union

The hoses must be installed without stress and bends so that they do not apply any forces to the rotating union. The following figures show examples of installation.



If you want to connect the rotating unions to a machine then you must make the connection with flexible hoses. Flexible hoses prevent any side loads occurring on the rotating union's bearing during operation.

Fig. 5: Example of flexible hose connection



If the hoses are to be guided away from the rotating unions vertically and bent by 90°, connect the hoses as shown.


Fig. 6: Hoses bent by 90°



If the hoses are to be guided away from the rotating unions horizontally and bent by 90°, connect the hoses as shown.

Fig. 7: Horizontal connection

4.5 Using a locking element

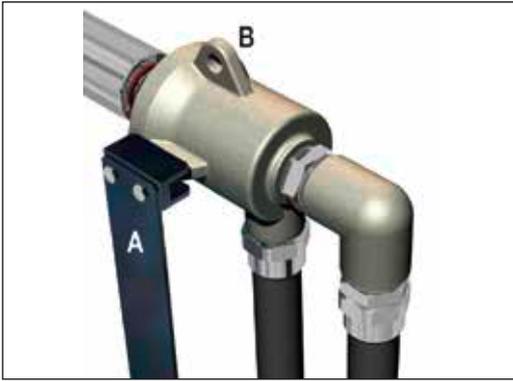

The rotating union housing must be secured against rotation during operation using an anti-rotation element **(A)**. For this the rotating unions are fitted with torque supports **(B)** on the housing. The anti-rotation devices can be attached to these torque supports but must not prevent axial movement.

Fig. 8: Example of a possible locking element



Warning

Risk of injury due to incorrect installation

If the rotating unions are under stress then the wearing of seals due to linear expansion cannot be counterbalanced. The rotating unions will leak once they have reached a degree of wear. Leaking steam or thermal oil could seriously injure people.

- Make sure that the rotating unions are always installed without stress.
- Please note the details on linear growth in the union's specific installation drawing.

5 Installation

The union installation is described in an additional manual which is supplied with each rotating union. Please follow the additional instruction "Installation" for a secure and correct installation of the rotating union. The instruction "Installation" is available online under www.deublin.eu.

- Ensure that the person installing the rotating union receives the following information:
 - Position and location of the rotating union in the machine
 - Plan for connection of hoses
 - Position of leakage line
 - Information on the media

6 Information on the Operation



Note

Damage to components through operation without a medium (Dry run)

The axial face seals of the rotating unions are lubricated by the medium. If the rotating unions are operated without medium present they are not lubricated and will thus be damaged.

- Ensure that the rotating unions are operated with a medium.
- Switch off the plant/machine, if the rotating unions are operated without medium.



7 Storage



Note

Damage of component due to incorrect storage

If you store the rotating unions incorrectly, they become leaky or get damaged.

- Store the rotating unions in a dry space between 3 °C and 40 °C.
- Store rotating unions for two years at the most.

8 Maintenance

This chapter provides information on how to extend the service life of the rotating unions by means of maintenance.

8.1 Maintenance Intervals

The series 9000 rotating unions are maintenance free.



Warning

Risk of injury due to hot or cold surfaces

The rotating unions are heated or cooled by the temperature of the medium.

Skin contact with these heated or cooled rotating unions can cause severe injuries.

- Before starting to work on the rotating union, allow the machine and media to cool down.
- Use safety gloves and PPE (Personal Protective Equipment) protecting against heat or cold depending on the application of the rotating unions.



Info

The rotating unions are lubricated with mediums.

8.2 Daily Inspection

Check the rotating unions for tightness.



Warning

Risk of injuries due to applied line pressure

If you have to work on the rotating union and feed pressure of the medium is applied or there is residual pressure in the piping system of the machine, the medium can escape under pressure when releasing the connections. You and other people may suffer severe injuries.

- Ensure that no feed pressure is applied.
- Ensure that there is no residual pressure in the piping system.



Warning

Risk of injury due to hot surfaces

If you are carrying out work on the rotating union and the medium's pump pressure is on the machine or there is residual pressure in the machine's piping system, when loosening connections the medium can leak out under pressure. You and other people could be seriously injured.

- Ensure that no feed pressure is applied.
- Ensure that there is no residual pressure in the piping system.
- Ensure media and machine is cool enough to work on.

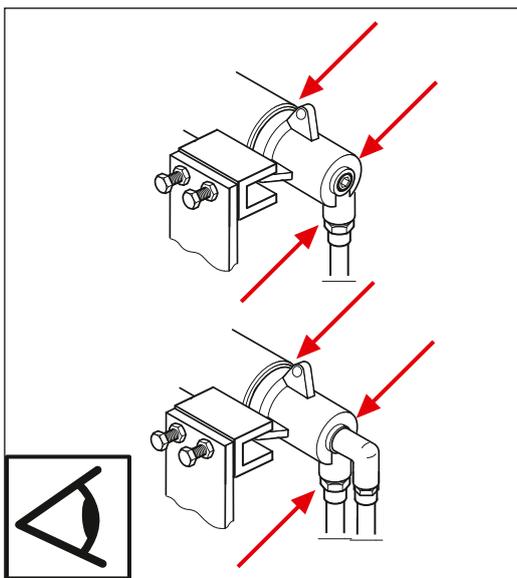


Fig. 9: Inspect visually

During operation of the machine, leakages may occur at the connections and hoses depending on the requirements to the rotating unions.

1. Carry out daily visual inspections in order to check whether leakages occurred at the connections (see arrows).

If you detect leakage:

1. Stop the machine.
2. Replace the defective hoses with new ones.
3. Seal leaking connections.
4. If the rotating union is worn and leaks and the wear indicator on the rotor is visible and flush with the end of the end cap (Fig. 10), replace the seal with a new one. Repair kits are also available for these models from *DEUBLIN*.

8.2.1 Monitoring wear

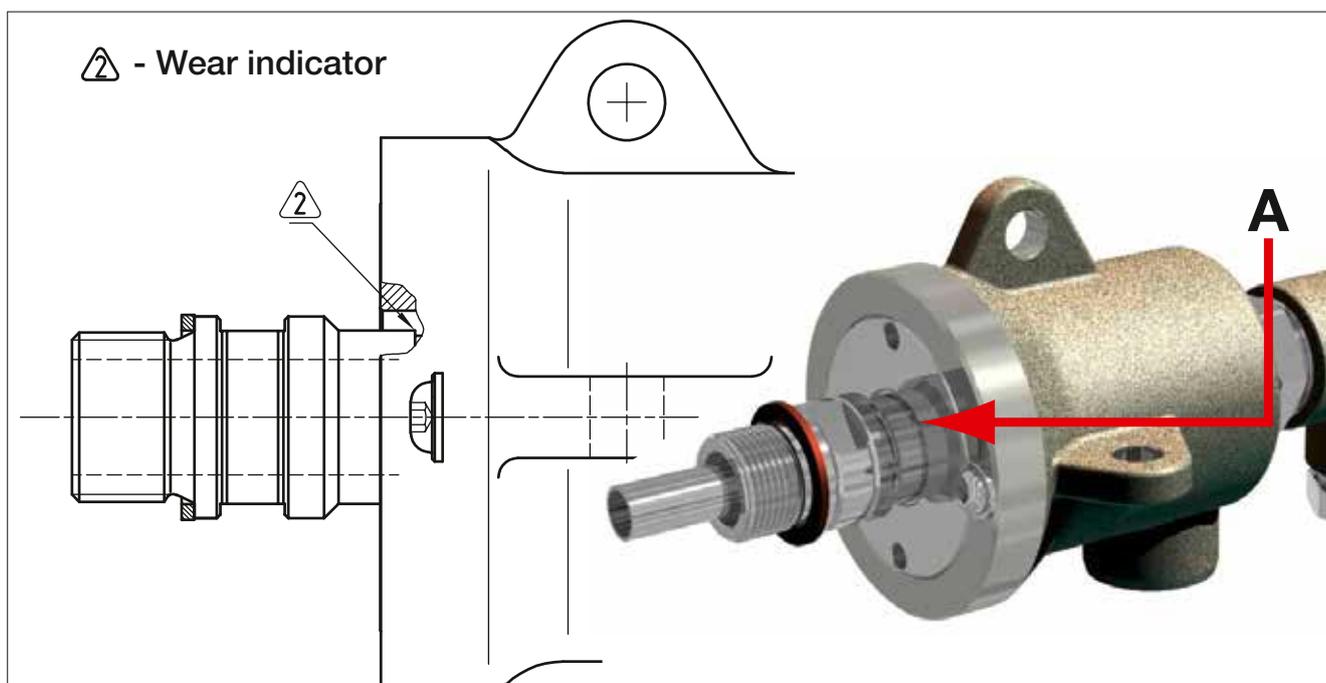


Fig. 10: Wear indicator on the rotor

The rotating unions are fitted with carbon graphite seals. The more the seals are worn, the further the rotor protrudes out of the housing. To establish the degree of wear, there is a wear indicator (**A**) on the rotor. If the wear indicator can be seen then you must immediately replace the seals.

- Check the rotor to see if the wear indicator is visible.
- Have the union repaired by *DEUBLIN* or have the seals and rotor replaced by a competent person (see “Spare Parts” section on page 15).



Risk of injury due to worn rotating unions

If the rotating union seals are worn then medium can leak and seriously injure people.

- Check the rotating union for wear every day.
- Immediately replace worn rotating unions.



8.3 Maintenance

This rotating union does not require any special care or additional lubrication. This rotating union is maintenance free.

9 Trouble Shooting

This chapter provides the following information:

1. Which problem may occur?
2. What can be the cause of the problem?
3. How can you eliminate this problem?



Info

Do not disassemble the rotating unions for repair. This invalidates the warranty claim.

9.1 Potential Causes for Errors and their Elimination



Warning

Risk of injuries due to applied line pressure

If you have to work on the rotating union and feed pressure of the medium is applied or there is residual pressure in the piping system of the machine, the medium can escape under pressure when releasing the connections. You and other people may suffer serious injuries.

- Ensure that no feed pressure is applied.
- Ensure that there is no residual pressure in the piping system.



Warning

Risk of injury due to worn rotating unions

If the rotating union seals are worn then medium can leak and seriously injure people.

- Check the rotating union for wear every day.
- Immediately replace worn rotating unions.

Error	Potential causes	Elimination
Rotating union is leaky after installation.	Incorrect installation.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Ensure that the connections are sealed according to the manual "Installation". 3. Ensure that all hoses are installed without stress. 4. Ensure that all seal faces are clean. 5. Ensure that the anti-twist device is installed without stress.
	Seal faces of the rotating union are damaged.	<ol style="list-style-type: none"> 1. Pack rotating union. 2. Send rotating union to <i>DEUBLIN</i> for overhaul/service.
Drying cylinder is flooded.	With elbow type C: gasket is damaged.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Dismantle the rotating union. 3. Ensure that the gasket in the elbow is not damaged, replace defective gasket. 4. Ensure that the gasket is in the correct position (see model specific installation drawing), if necessary adjust position.
	With elbow type C: gasket is not correctly adjusted.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Dismantle the rotating union. 3. Ensure that the gland is sufficiently pressed into the elbow.
	Siphon hose is broken off.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Dismantle the rotating union 3. Replace the siphon hose.
Rotating union leaks before the end of the expected service life.	Medium is contaminated.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Drain medium. 3. Send rotating union to <i>DEUBLIN</i> for overhaul/service, if required. 4. Mount new filter. 5. Flush the piping system of the machine. 6. Fill in new medium.
	Rotating union is not designed for the respective application.	<ol style="list-style-type: none"> 1. Ensure that the correct <i>DEUBLIN</i> Rotating Union is used. 2. Contact <i>DEUBLIN</i> if required.
Rotating union runs untrue or wobbles.	Thread and/or concentricity outside the admissible tolerance.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Remove rotating union. 3. Manufacture new thread or flange.
	Rotating union is mounted incorrectly.	<ol style="list-style-type: none"> 1. Stop the machine. 2. Remove rotating union. 3. Mount the rotating union according to installation instructions.

9.2 Pack Rotating Union for Transport

The rotating union has to be protected against mechanical impact and humidity during transport to ensure that the rotating union will arrive at *DEUBLIN* without being damaged.

1. Dismount the rotating union in reverse order of the installation (see Installation).
2. Ensure that the rotating union is free from the respective media.
3. Use a cardboard box which is suitable for the weight of the rotating union.

4. Cushion the base of the cardboard box with a soft material, e.g. air bubble film.
5. Wrap the rotating union with a soft material, e.g. air bubble film.
6. Ensure that no packing material or dirt can penetrate the opening of the rotating union.
7. Position the rotating union in the middle of the cardboard box.
8. Fill the free space around the rotating union with newspaper or another suitable material.
9. Close the cardboard box by means of tape.

10 Disposal

10.1 Dispose of Packaging

- Dispose of the packaging (cardboard box and plastics) according to the national standards, regulations and directives.

10.2 Dispose of Rotating Union

Mainly, the rotating unions consist of metals, which can be reused within the reclamation of scrap. Decontaminate unions / parts and dispose of in an “Environmentally Friendly” way.

- Dismount the rotating union in reverse order to the installation (see Installation).
- Flush the rotating union.
- Collect the dirty flushing media.
- Dispose of the collected flushing media according to the national standards, regulations and directives.
- If you use thermal oil, please observe the instructions of the thermal oil manufacturer.
- Dispose of the rotating union according to the national standards, regulations and directives.

In case of repair, *DEUBLIN* disposes of all used parts.

11 Spare Parts

The rotating unions have a limited service life and include wearing parts. Wearing parts are excluded from the warranty. All static and dynamic sealing elements of a component are considered wearing parts, as well as ball bearings.

Repair kits are available for 9000 series of the rotating unions and can be obtained from *DEUBLIN*. Please ask your *DEUBLIN* Service.

You need special tools and repair instructions for repair of the rotating unions which can be obtained from *DEUBLIN* as well.



Info

Note

If you do not want to repair your rotating union on your own, *DEUBLIN* will be pleased to help you. If requested, *DEUBLIN* will exchange all wearing parts and clean all components of the rotating union. Before repaired rotating unions leave the premises, they will be subjected to an operational check. The repaired rotating union is returned with a standard “*DEUBLIN* Warranty” valid for 12 months.

Reliability

Many years' experience, ongoing liaison with customers, innovations sourced inhouse and from suppliers place *DEUBLIN* in a position providing reliable Rotating Unions at the highest level.

When it comes to concrete applications, maximum service life is guaranteed by matching the sealing to the respective medium.

The service life is also equally maximized by maintaining cleanliness when storing and handling the Rotating Union and by adhering to the guidelines issued by *DEUBLIN* in respect of the conditions on the customer's premises.

EUROPE

DEUBLIN Germany

Florenz-Allee 1
55129 Mainz, Germany
Phone: +49 6131-49980
Fax: +49 6131-4998109
e-mail: info@deublin.de

DEUBLIN Italy

Via Guido Rossa 9 - Loc. Monteveglio
40053 Comune di Valsamoggia (BO), Italy
Phone: +39 051-835611
Fax: +39 051-832091
e-mail: info@deublin.it

DEUBLIN Austria

Lainzer Straße 35
1130 Wien, Austria
Phone: +43 1-8768450
Fax: +43 1-876845030
e-mail: info@deublin.eu

DEUBLIN France

61 Bis, Avenue de l'Europe
Z.A.C de la Malnoue, Emerainville
77436 Marne-la-Vallée Cedex 2, France
Phone: +33 1-64616161
Fax: +33 1-64616364
e-mail: service.client@deublin.fr

DEUBLIN Poland

ul. Bierutowska 57-59
51-317 Wrocław, Poland
Phone: +48 71-3528152
Fax: +48 71-3207306
e-mail: info@deublin.pl

DEUBLIN Russia

ul. Kosygina, 13, 5th entrance, 1st floor
Moscow, 119334, Russia
Phone: +7 495-647 1434
Fax: +7 495-938 8949
e-mail: info@deublinrussia.ru

DEUBLIN Spain

C/ Lola Anglada, 20 local 1
08228 Terrassa, Spain
Phone: +34 93-221 1223
Fax: +34 93-221 2093
e-mail: deublin@deublin.es

DEUBLIN United Kingdom

6 Sopwith Park, Royce Close, West Portway
Andover SP10 3TS, UK
Phone: +44 1264-33 3355
Fax: +44 1264-33 3304
e-mail: info@deublin.co.uk

AMERICA

DEUBLIN USA

2050 Norman Drive
Waukegan, IL 60085-6747 U.S.A
Phone: +1 847-689 8600
Fax: +1 847-689 8690
e-mail: customerservice@deublin.com

DEUBLIN Brazil

Rua Fagundes de Oliveira, 538 - Galpão A11
Piraporinha
09950-300 - Diadema - SP - Brasil
Phone: +55 11-2455 3245
Fax: +55 11-2455 2358
e-mail: deublinbrasil@deublinbrasil.com.br

DEUBLIN Mexico

Norte 79-A No. 77, Col. Claveria
02080 Mexico, D.F.
Phone: +52 55-5342 0362
Fax: +52 55-5342 0157
e-mail: deublinmexicocs@deublin.com

ASIA

DEUBLIN China

No. 2, 6th DD Street,
DD Port Dalian, 116620, China
Phone: +86 411-8754 9678
Fax: +86 411-8754 9679
e-mail: info@deublin.cn

Shanghai Branch Office

Room 15A07, Wangjiao Plaza
No. 175 East Yan'an Road, Huangpu District
Shanghai 200002
Phone: +86 21-5298 0791
Fax: +86 21-5298 0790
e-mail: info@deublin.cn

DEUBLIN Asia Pacific

51 Goldhill Plaza
#17-02 Singapore 308900
Phone: +65 6259-92 25
Fax: +65 6259-97 23
email: deublin@singnet.com.sg

DEUBLIN Japan

2-13-1, Minamihanayashiki, Kawanishi City
Hyogo 666-0026, Japan
Phone: +81 72-757 0099
Fax: +81 72-757 0120
e-mail: customerservice@deublin-japan.co.jp

2-4-10-3F, Ryogoku, Sumida-ku

Tokyo 130-0026, Japan
Phone: +81 35-625 0777
Fax: +81 35-625 0888
e-mail: customerservice@deublin-japan.co.jp

1-9-2-4F, Mikawaanjo-cho, Anjo City

Aichi 446-0056, Japan
Phone: +81 566-71 4360
Fax: +81 566-71 4361
e-mail: customerservice@deublin-japan.co.jp

DEUBLIN Korea

Star Tower #1003, Sangdaewon-dong 223-25,
Jungwon-gu, Seongnam-si, Gyeonggi-do,
South Korea
Phone: +82 31-8018 5777
Fax: +82 31-8018 5780
e-mail: customerservice@deublin.co.kr