
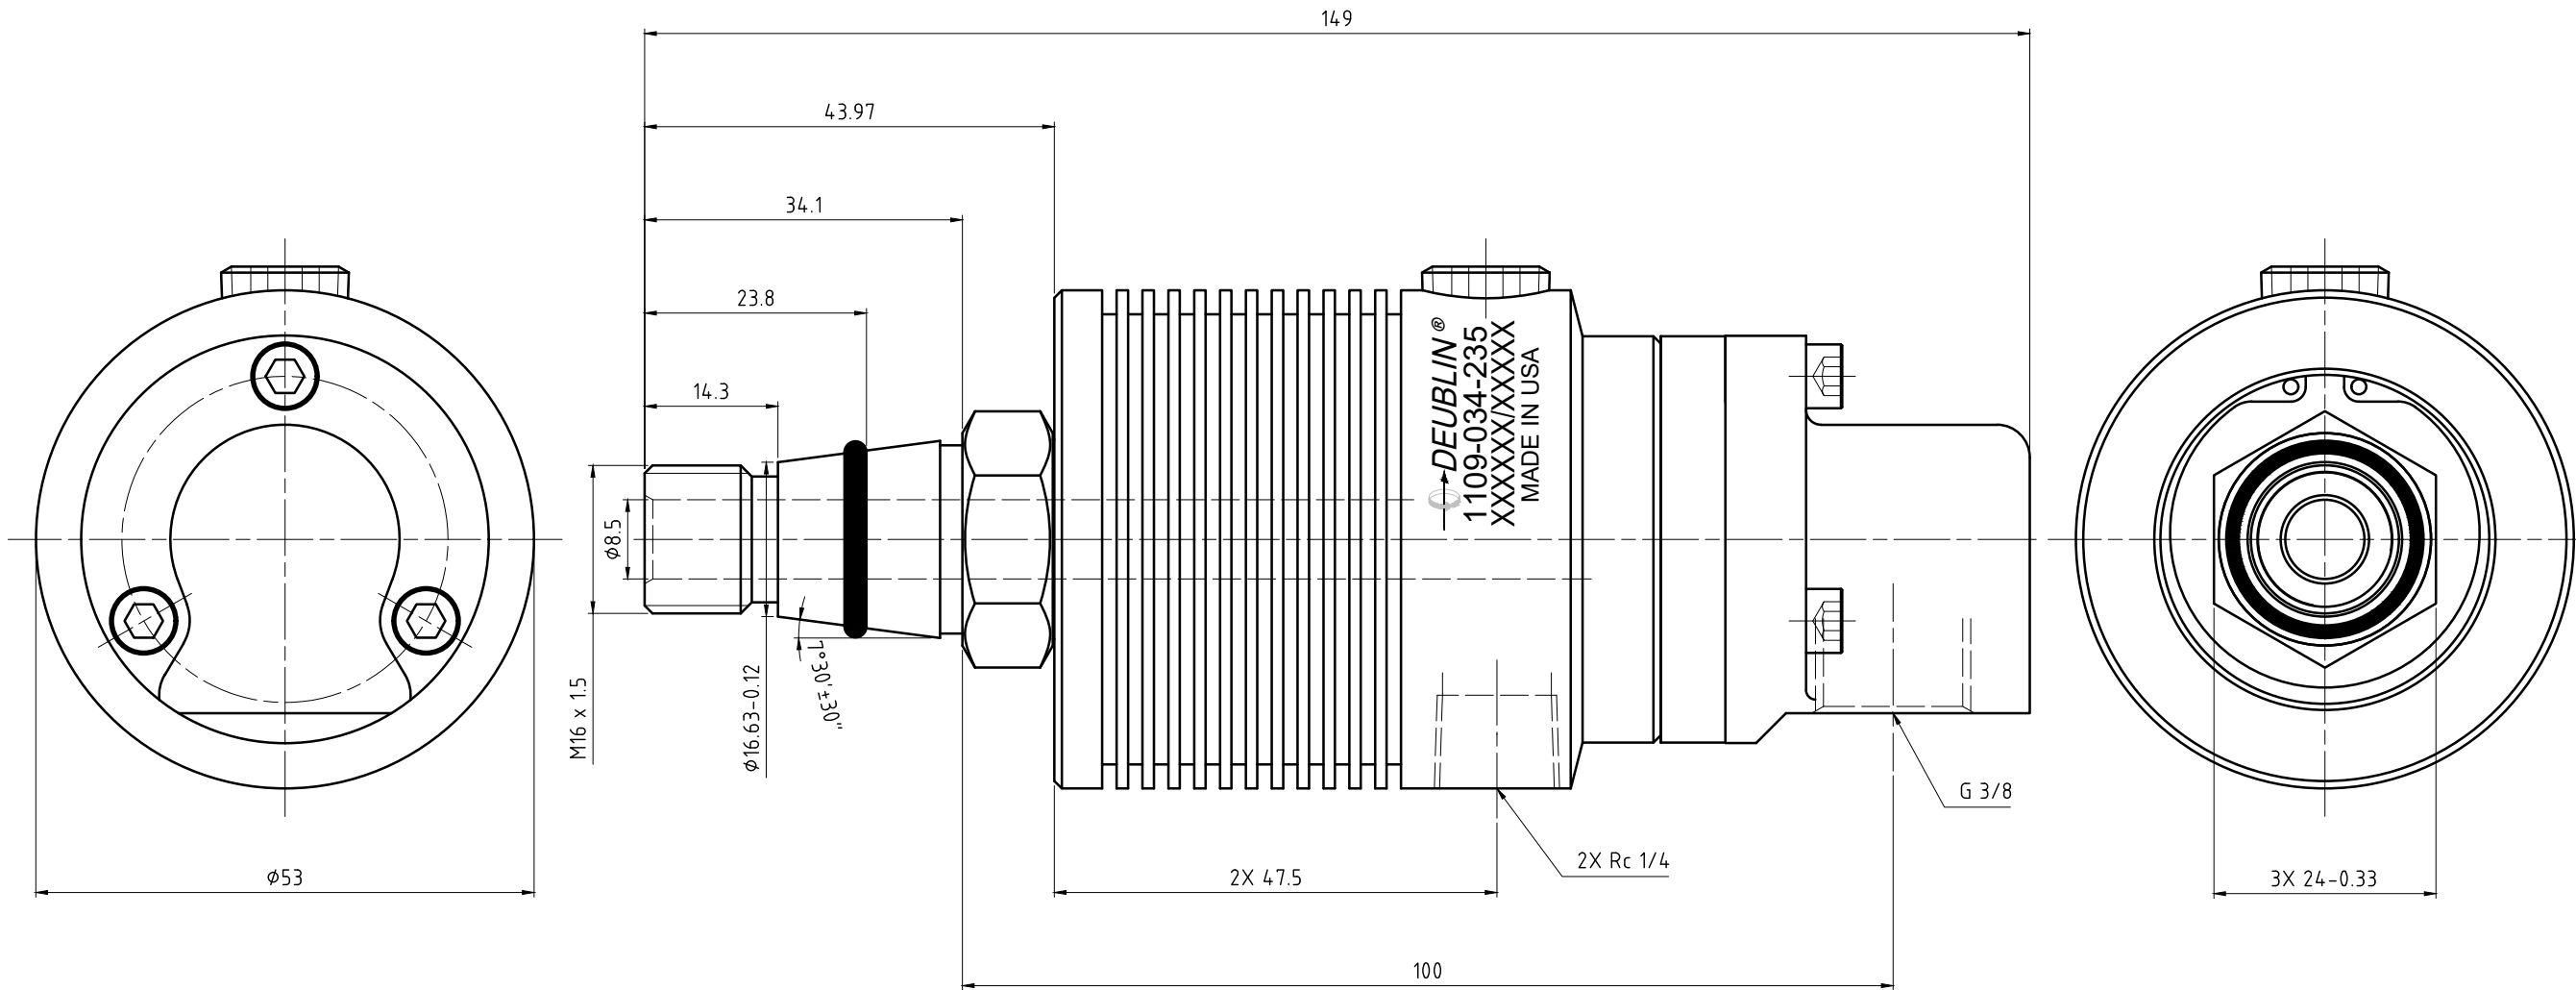


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO
THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.



OPERATING DATA			
MEDIA	COOLANT		MQL
	MAXIMUM	105 bar	10 bar
PRESSURE	MINIMUM	1 bar	1 bar
FLOW RATE	MAXIMUM	82 L/min	3810 NL/min
	MINIMUM	6 L/min	360 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		20000 min ⁻¹	20000 min ⁻¹
DRY RUN		UNPRESSURIZED ONLY	
RECOMMENDED FILTRATION		ISO 4406 CLASS 17/15/12	

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1				
							MATERIAL:		INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE:				
				DRN.	22.03.06	Ch. Wolf	DEUBLIN UNION				
				ENGR.	22.03.06	H.J. Huhn					
				APPD.							
B	ADD ITALIAN LAYER	031349	01/15	RA	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE				NO.	1109-034-235	SHEET A2
A	UPDATE DWG	025297	01/14	RA							
ISSUE	MODIFICATION	ECO	DATE	SIGN							