

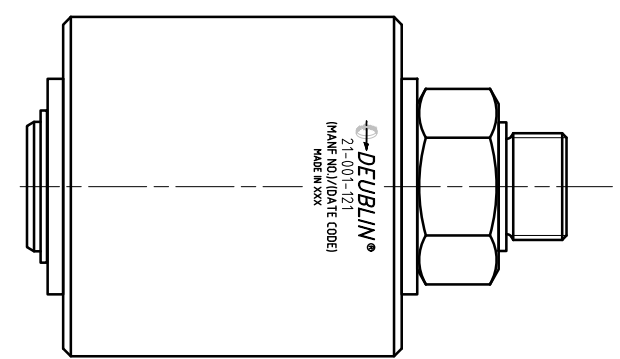


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

- NOTES:
- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
 - 2 - USE INSTALLATION INSTRUCTION 040-513.
 - 3 - GASKET.

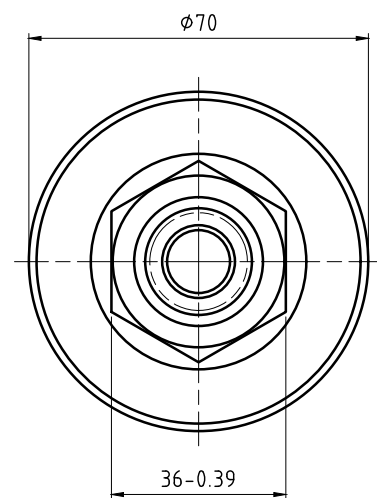

OPERATING DATA 1				
MEDIA		AIR	HYDRAULIC OIL	VACUUM
PRESSURE	MAXIMUM	10 bar	204 bar	6.7 kPa
	MINIMUM	5 °C	5 °C	5 °C
TEMPERATURE	MAXIMUM	121 °C	121 °C	121 °C
	MINIMUM	5 °C	5 °C	5 °C
SPEED	MAXIMUM	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
	MINIMUM			

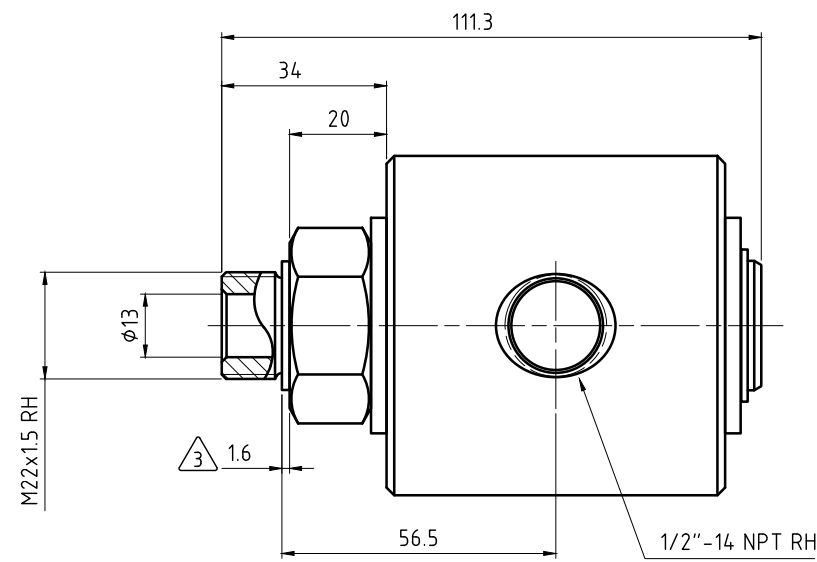

PROJECTION:

SCALE: 1:1

MATERIAL:

DATE	NAME	TITLE: INTERFACE CONTROL DRAWING UNION, 21, M22x1.5 RH ROTOR
DRN. 11/04/2009	galindolm	
ENGR. 04/06/2010	eloacker	
APPD.		
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		NO. 21-001-121
ISSUE	MODIFICATION	ECO
DATE	SIGN	

SHEET A2