

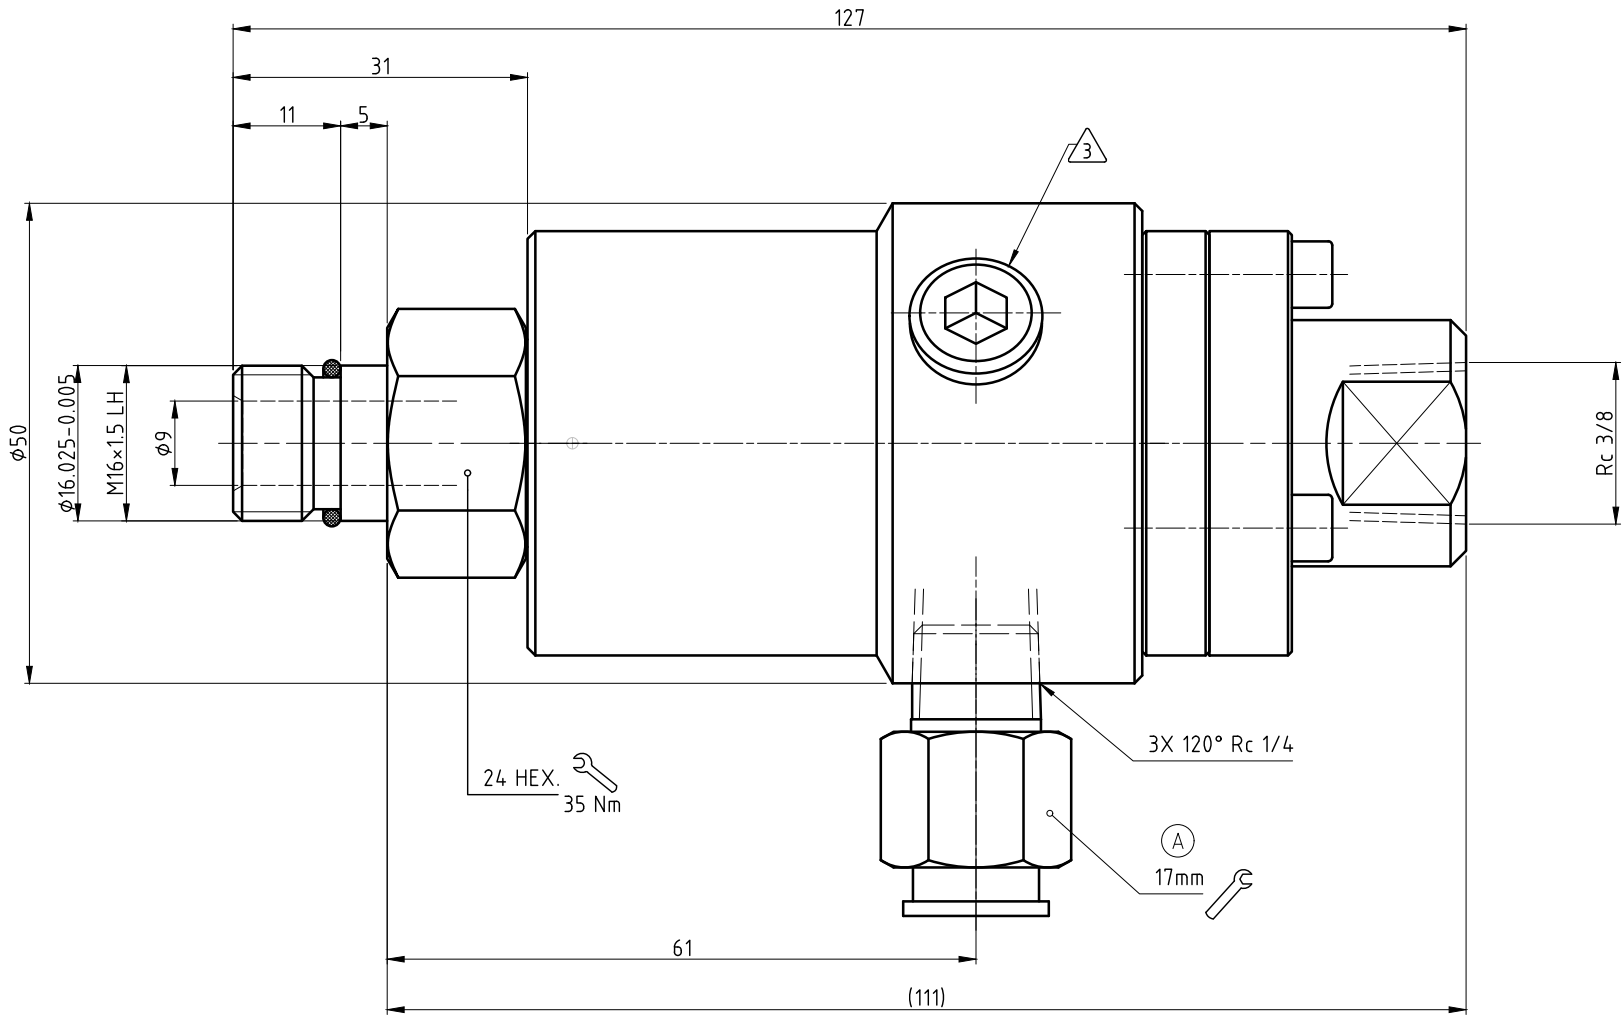


NOTES:

- 1 - SPINDLE BEARING ARRANGEMENT
2 - ROUNDED
3 - 2X PIPE PLUG R 1/4

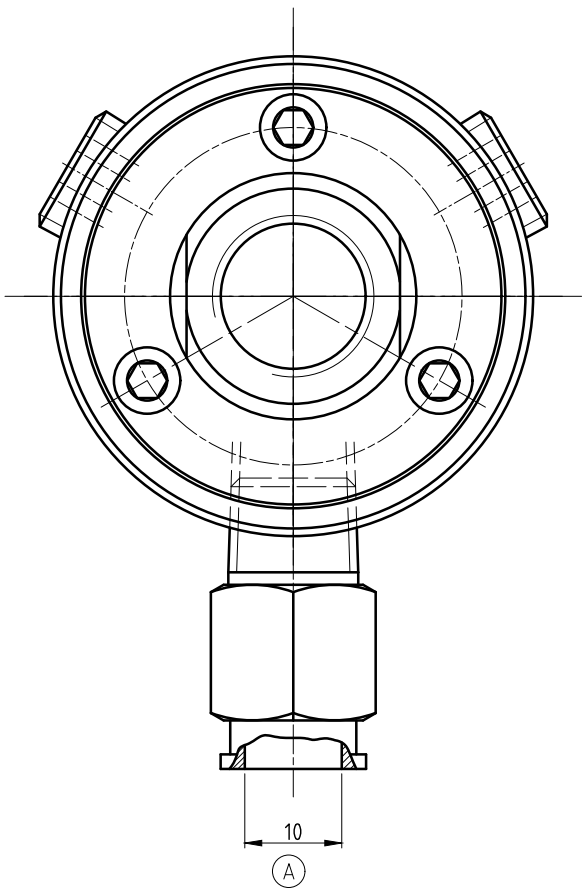

CUSTOMER INTERFACE

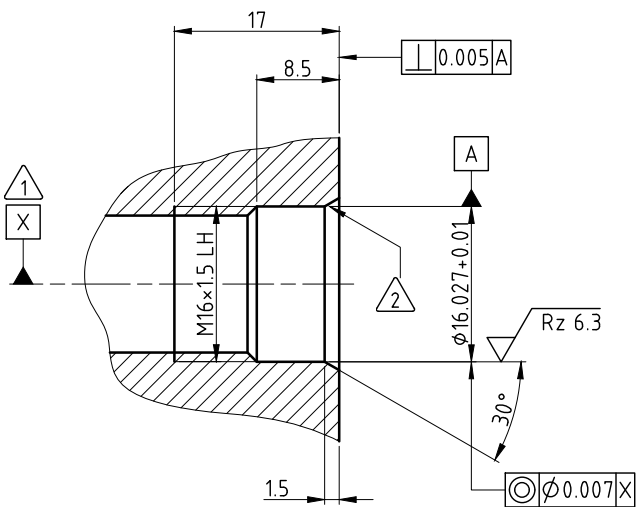

OPERATING DATA		
MEDIA	COOLANT	MQL
PRESSURE MAX.	70 bar	10 bar
SPEED MAX.	12000 min ⁻¹	12000 min ⁻¹
TEMPERATURE MAX.	70 °C	70 °C
FLOW RATE MAX.	82 l/min	2180 NI/min
DRY RUN	UNLIMITED	



SCALE: 2:1
MATERIAL: INTERFACE CONTROL DRAWING

DATE		NAME	
DRN.	06.02.2013	CW	
ENGR.	06.02.2013	CD	
APPD.			
A	ADDED ADAPTER	037852	05/16
ISSUE	MODIFICATION	ECO	DATE
		RM	SIGN

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung
NO. 902-141-192

SHEET
A2