
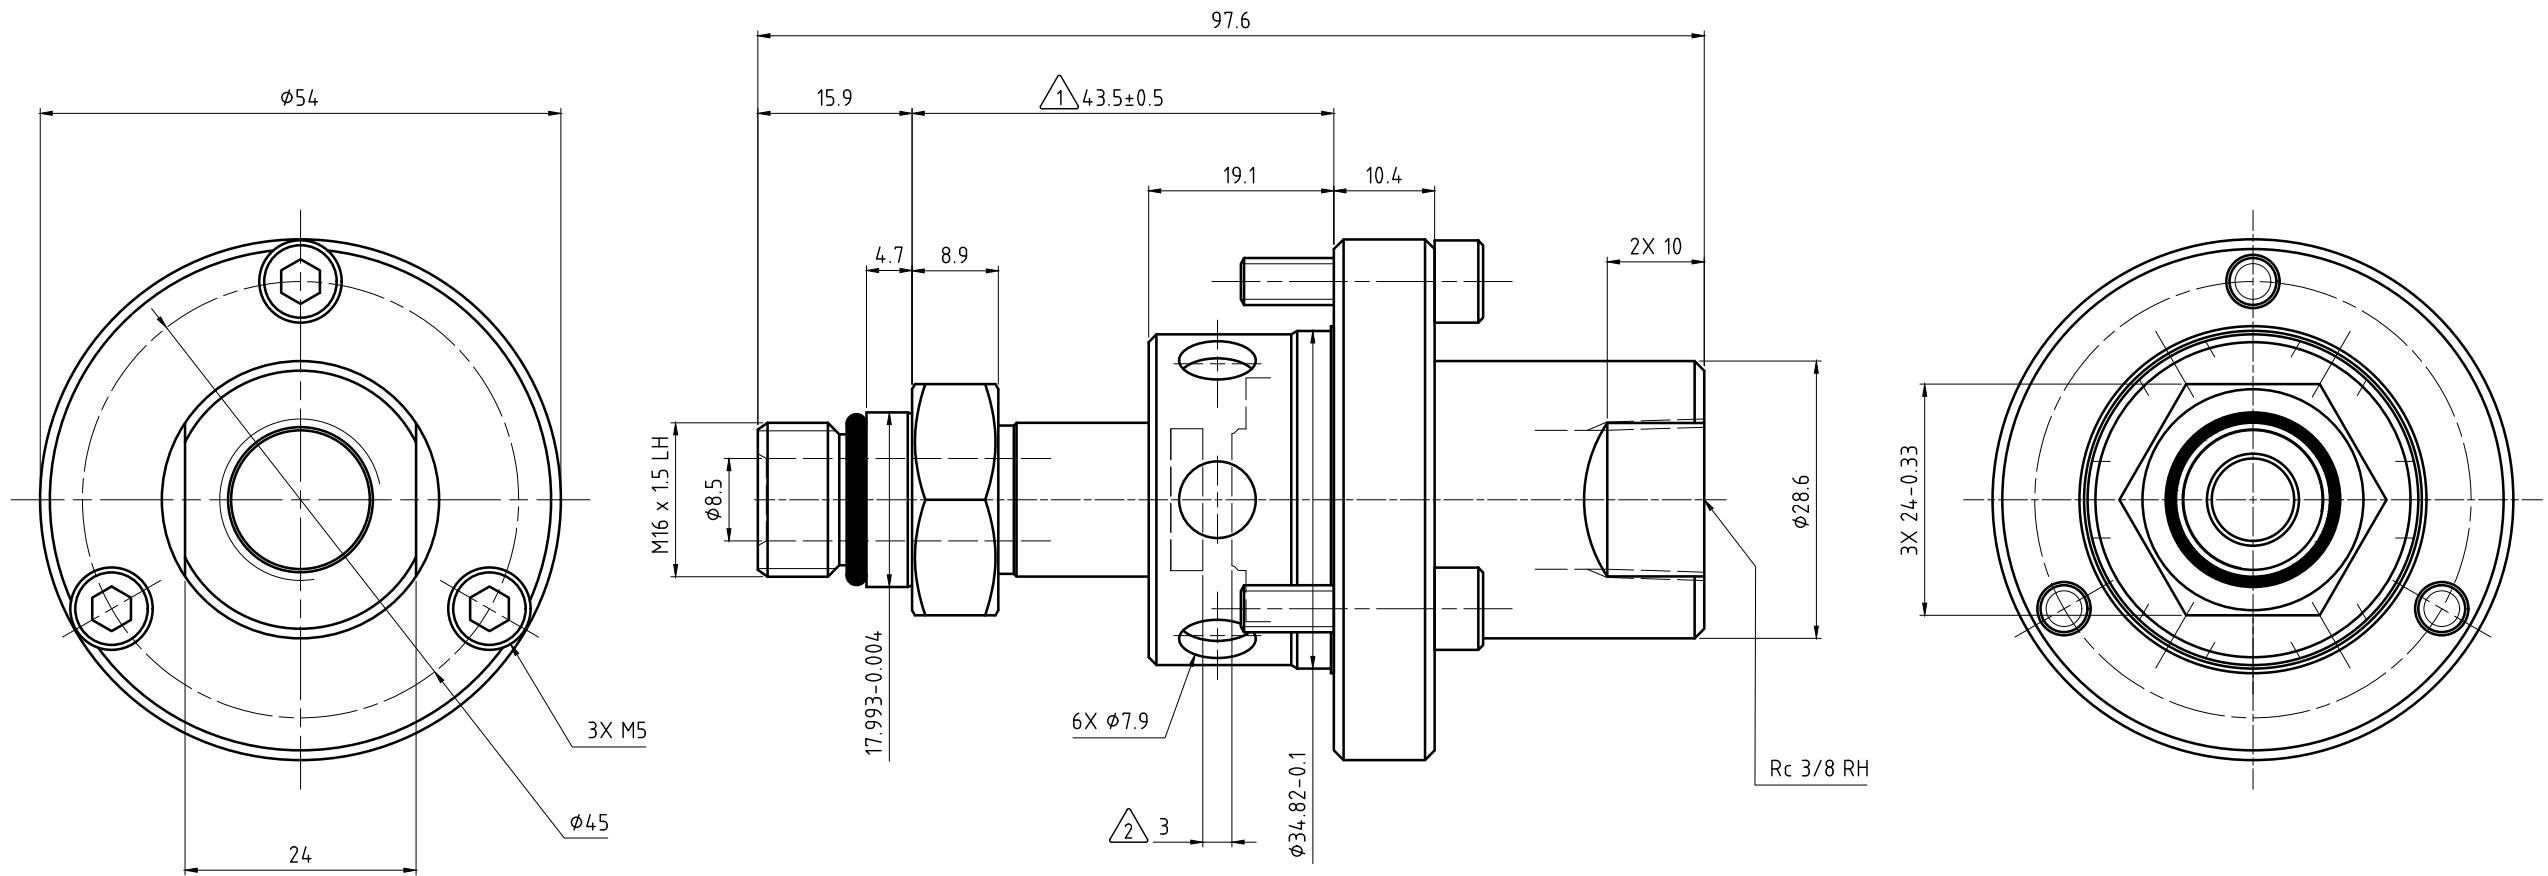


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO
THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:
1 - MOUNTING DIMENSION.
2 - FLOATING SEAL ASSEMBLY ACTUATION DISTANCE.



OPERATING DATA			
MEDIA		COOLANT	MQL
MEDIA PRESSURE	MAXIMUM	140 bar	10 bar
	MINIMUM	4 bar	4 bar
FLOW RATE	MAXIMUM	53 L/min	2460 NL/min
	MINIMUM	6 L/min	360 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		30000 min ⁻¹	30000 min ⁻¹
AXIAL FORCE		12.7 N/bar	
DRY RUN		UNPRESSURIZED ONLY	
RECOMMENDED FILTRATION		ISO 4406 CLASS 17/15/12	

 DEUBLIN <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1				
							MATERIAL:		INTERFACE CONTROL DRAWING		
					DATE		NAME		TITLE:		
					DRN. 02/18/2004		RM		DEUBLIN UNION		
					ENGR. 02/18/2004		ZK				
					APPD.						
							NO.				
							1129-016-301		SHEET		
									A2		
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						
D		UPDATED TO MS		027132	02/14	RA					
ISSUE		MODIFICATION		ECO	DATE	SIGN					