
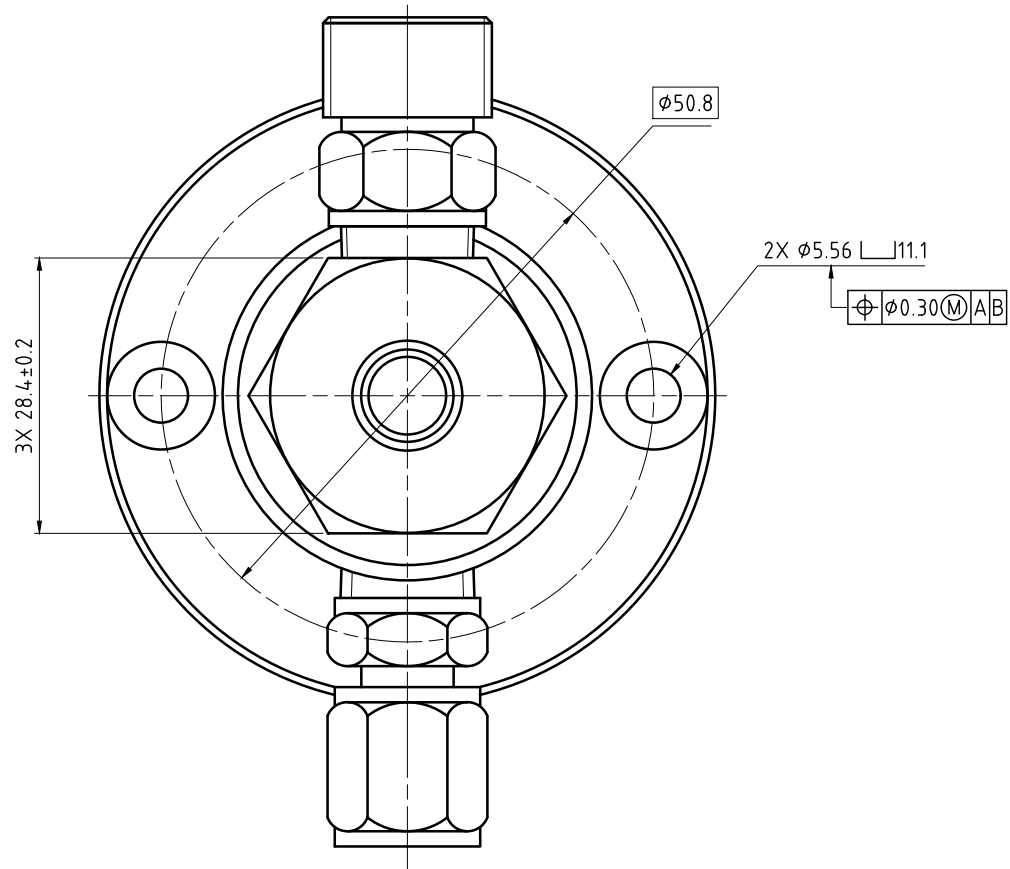


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED
SHOULD BE AVOIDED.
- 2 - FEATURE SHOWN ROTATED OUT OF POSITION FOR DRAWING CLARITY.

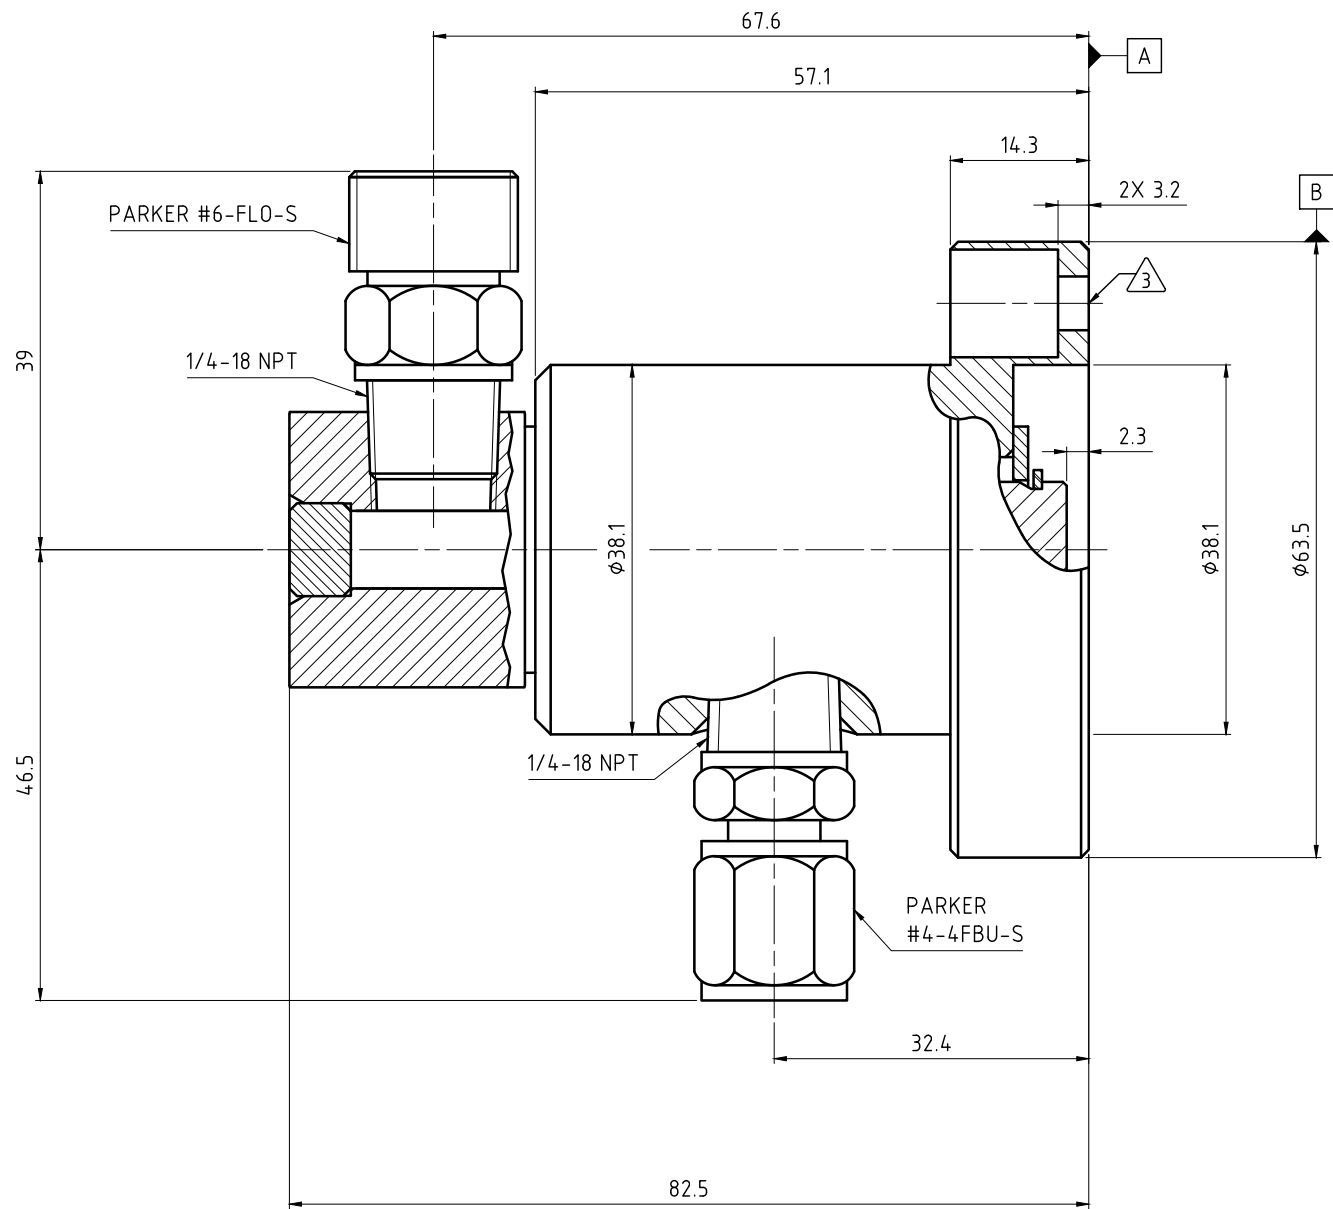

OPERATING DATA 1				
MEDIA		AIR	HYDRAULIC OIL	VACUUM
PRESSURE	MAXIMUM	10 bar	207 bar	6.7 kPa
	MINIMUM	121 °C	121 °C	121 °C
TEMPERATURE	MAXIMUM	5 °C	5 °C	5 °C
	MINIMUM	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
MAXIMUM SPEED				



SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME	TITLE
DRN. 12/11/15	N. Reyna	DEUBLIN UNION
ENGR. 12/11/15	T. Wilson	
APPD.		

NO. 17-068

SHEET A2

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE