
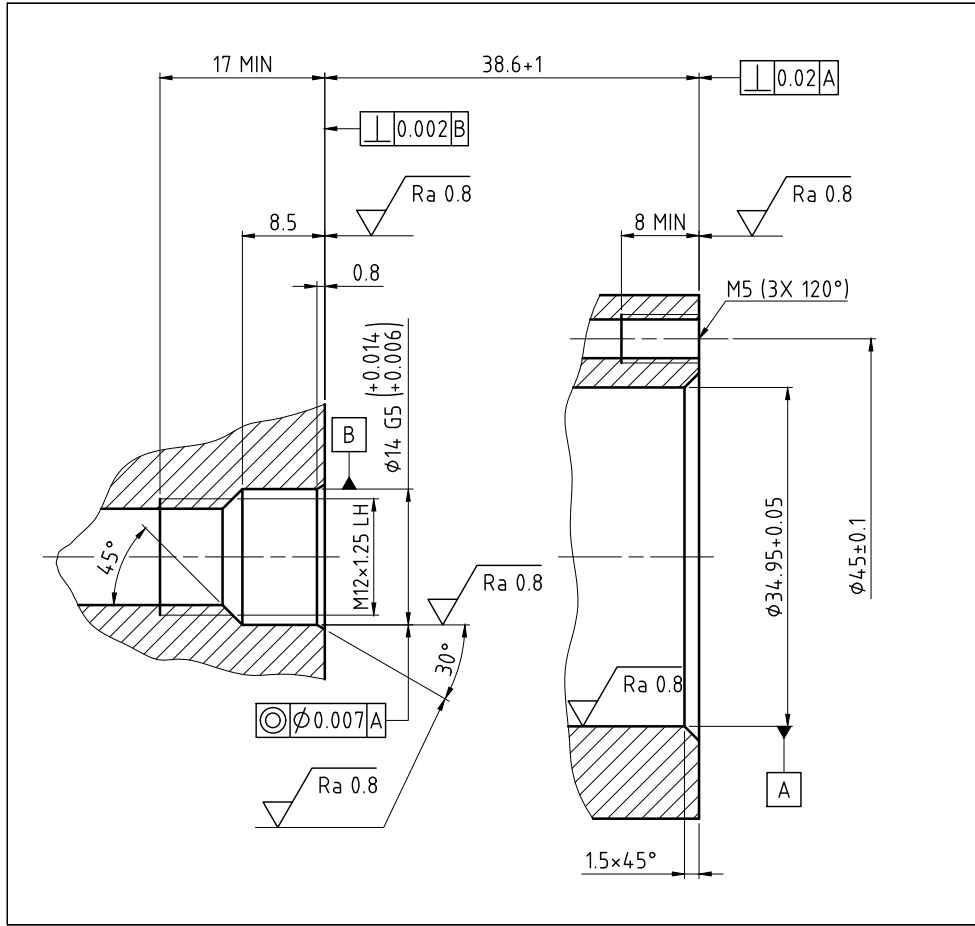
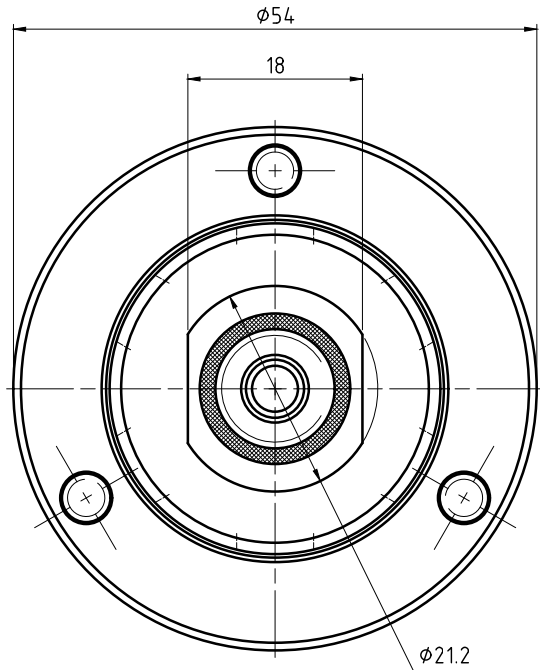
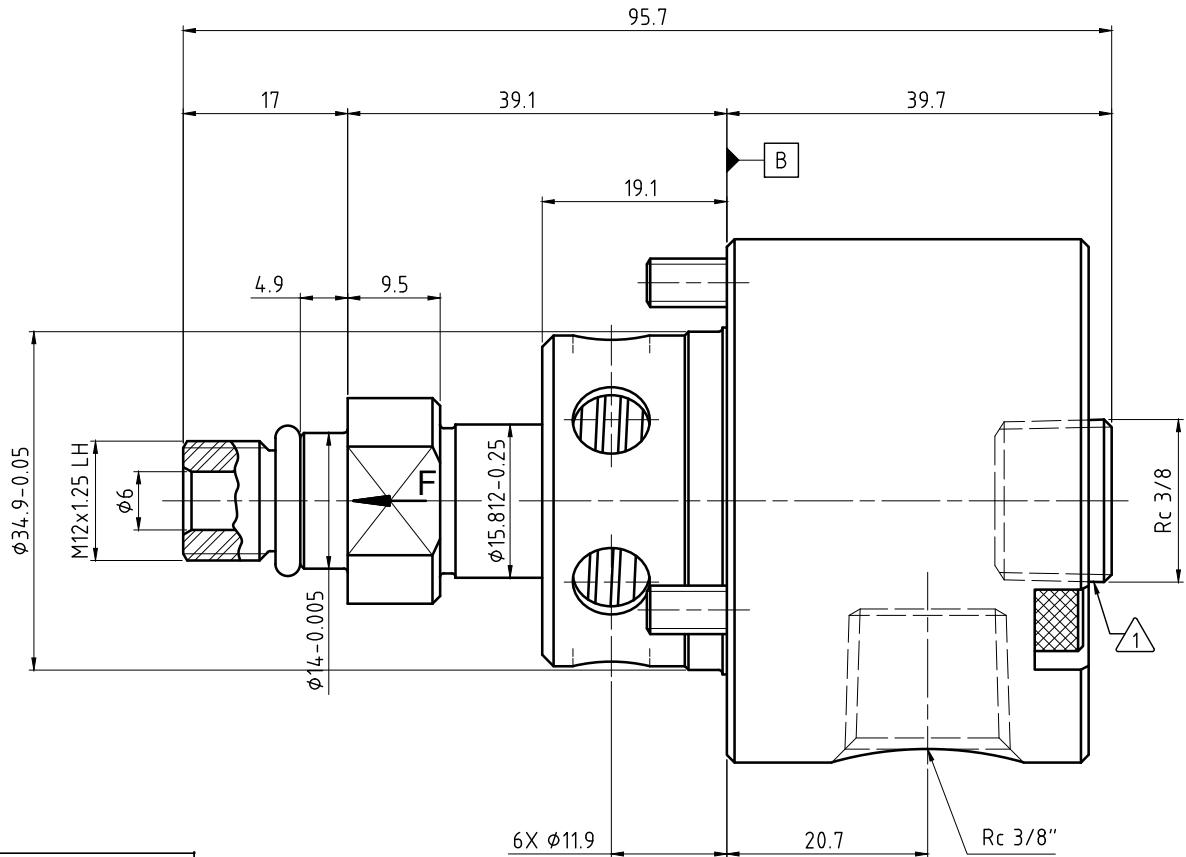


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

Ø14	G5	+0.014 +0.006	+0.014 +0.006
Dimen.	Fit		

NOTES:

1 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

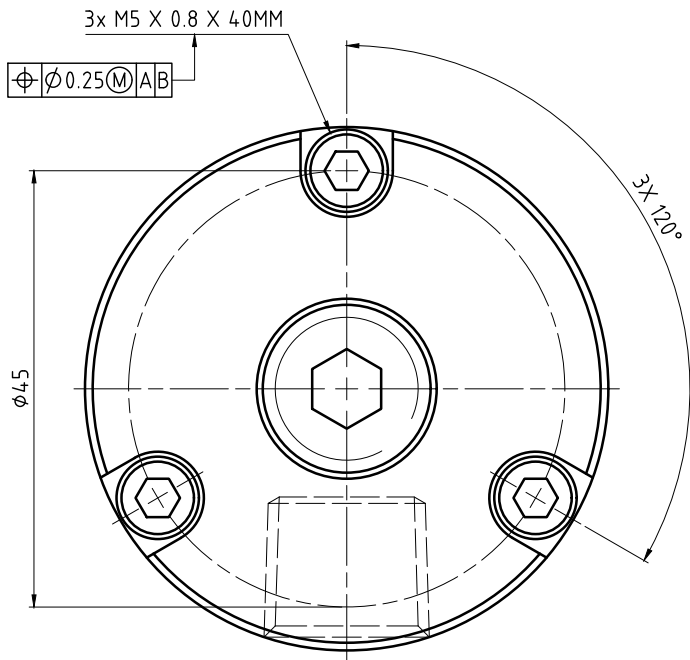

OPERATING DATA

MEDIA		COOLANT	MQL
PRESSURE	MAXIMUM	14.0 bar	70 bar
	MINIMUM	-	-
FLOW RATE	MAXIMUM	24.3 L/min	24.3 NL/sec
	MINIMUM	-	-
TEMPERATURE	MAXIMUM	71° C	71° C
	MINIMUM	-	-
DRY RUN		UNLIMITED	UNLIMITED
AXIAL FORCE		-	-
MAXIMUM SPEED		30,000 min ⁻¹	30,000 min ⁻¹



SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN UNION

D	REVISED TITLE	020946	11/12	NR
C	UPDATED TO MS	014453	07/11	NR
ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE

NO. 1129-033-327

SHEET
A2