CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

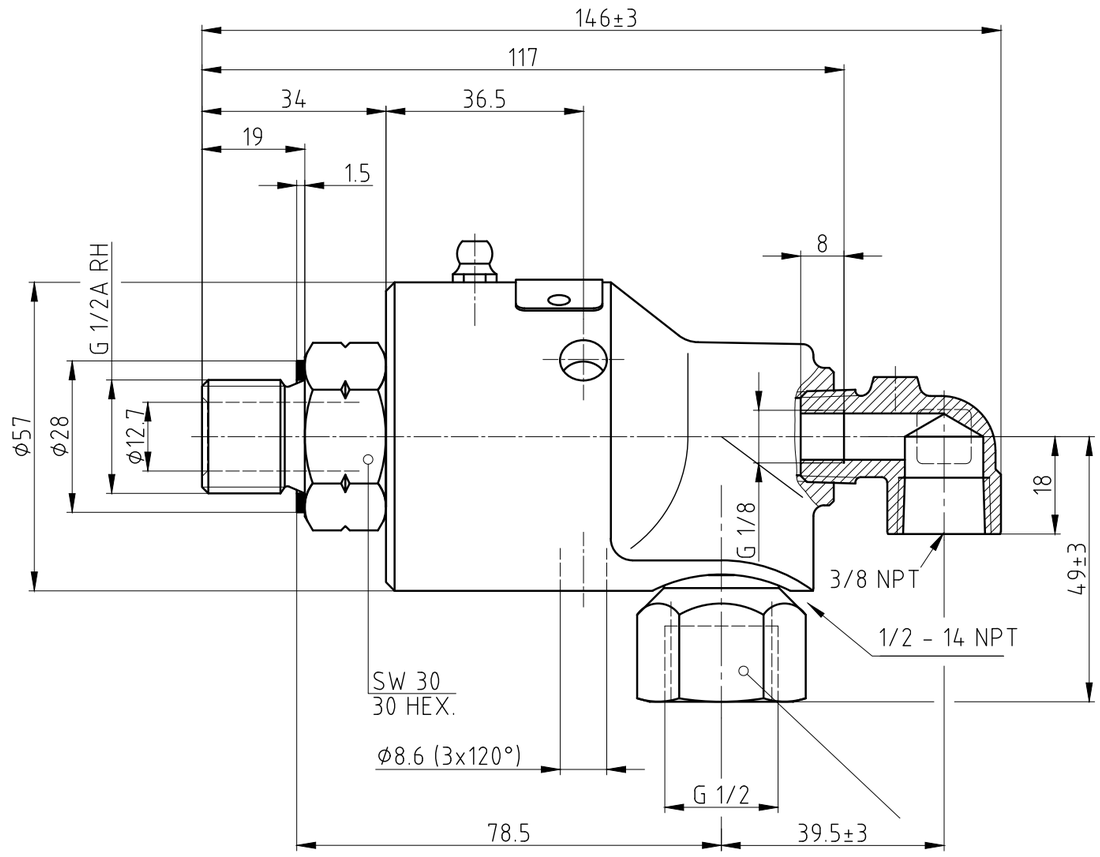

Anschlußstutzen 6301-044 (SW 27) gehört nicht zum Lieferumfang
ADAPTER 6301-044 (27 HEX.) NOT SUPPLIED WITH THE UNION

OPERATING DATA / Betriebsdaten

MEDIA Medium	WATER	Wasser	
MAXIMUM PRESSURE Max. Druck	750 PSI *	50 bar *	
MINIMUM OPERATING TEMPERATURE Min. Betriebstemperatur	· °F	· °C	
MAXIMUM OPERATING TEMPERATURE Max. Betriebstemperatur	250 °F	120 °C	ⓐ
MAXIMUM SPEED Max. Drehzahl	3500 RPM	3500 min^{-1}	
FILTRATION Filterung	60 µm	60 µm	
DRY RUN (WITHOUT ANY MEDIA) Trockenlauf (ohne Medium)	NO	nein	

* PRESSURES EXCEEDING 115 PSI ONLY PERMISSABLE WITH COLD WATER (MAX. 120°F)!
Drücke über 8 bar nur in Verbindung mit Kaltwasser (max. 50°C) zulässig!

DEUBLIN GmbH
D-65719 HOFHEIM-WALLAU, GERMANY

PROJECTION:

						DATE	NAME
					DRN.	03.12.1997	Grimm
					ENGR.	08.01.1998	Ch. Wolf
					APPD.		

ISSUE	MODIFICATION	ECO	DATE	SIGN
a	METR.DWG/OP.DATA	06034	21.02.06	FD

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SCALE: 1:1 | Z:\ \UNIONS\
MATERIAL:
TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung
NO. 155-000-151-199-DD
SHEET A3