
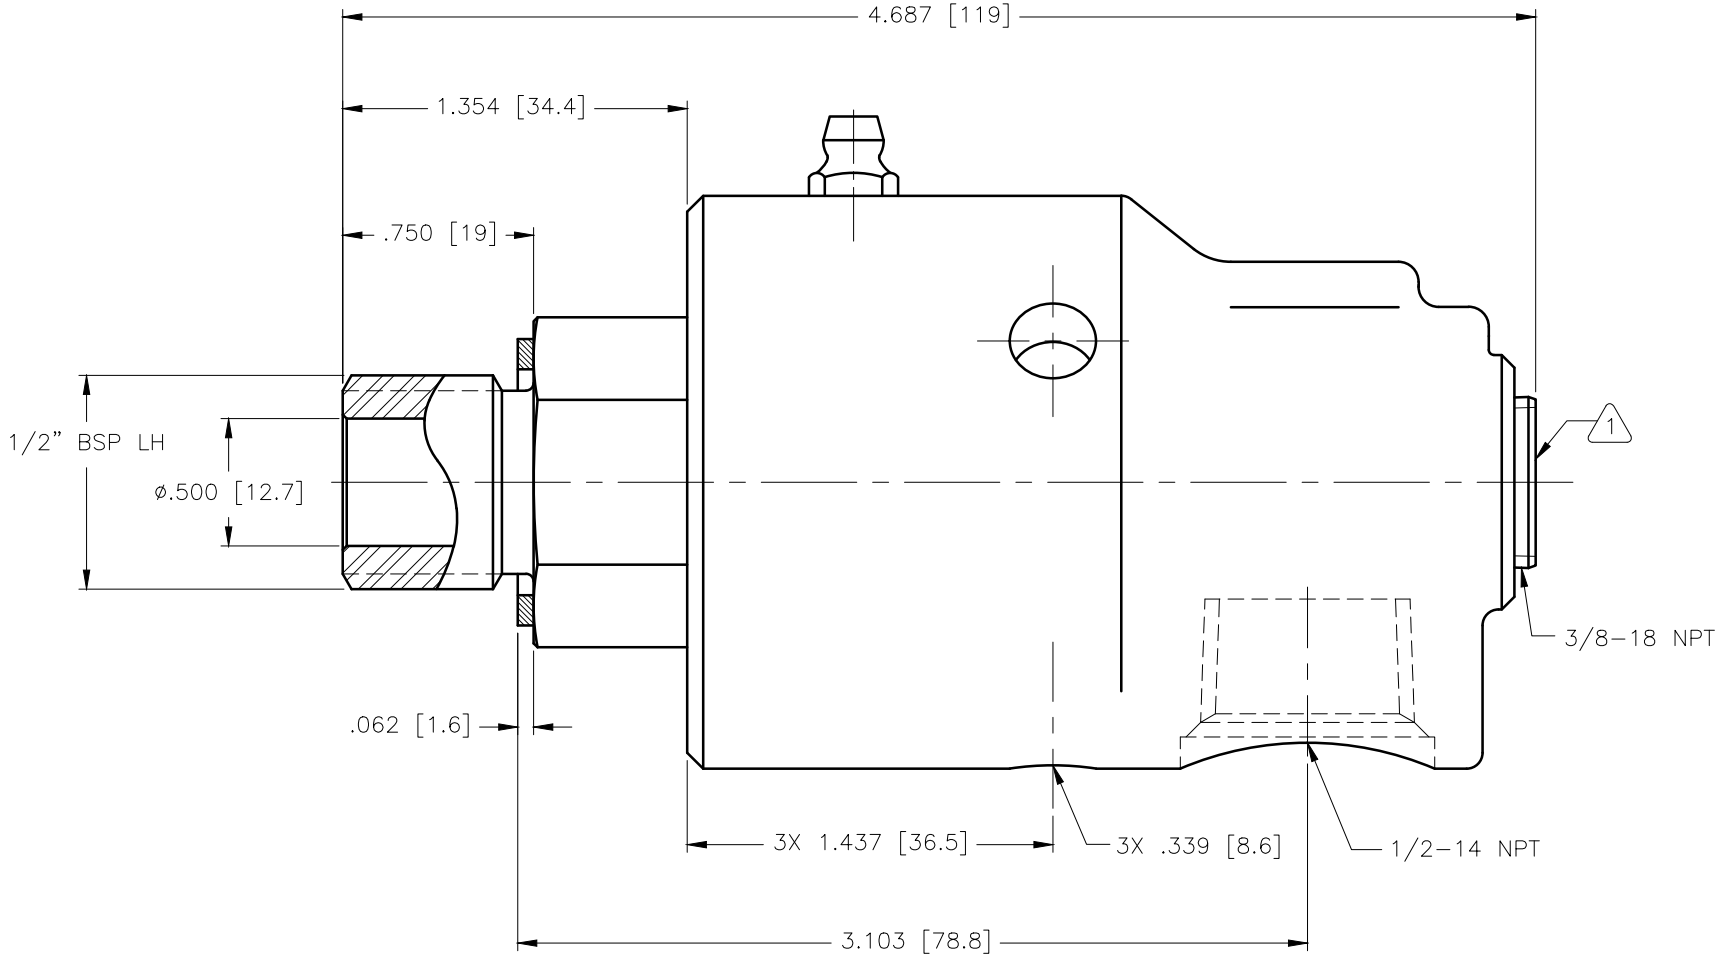


NOTES:

① – PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

DWG. NO.
155-139-152

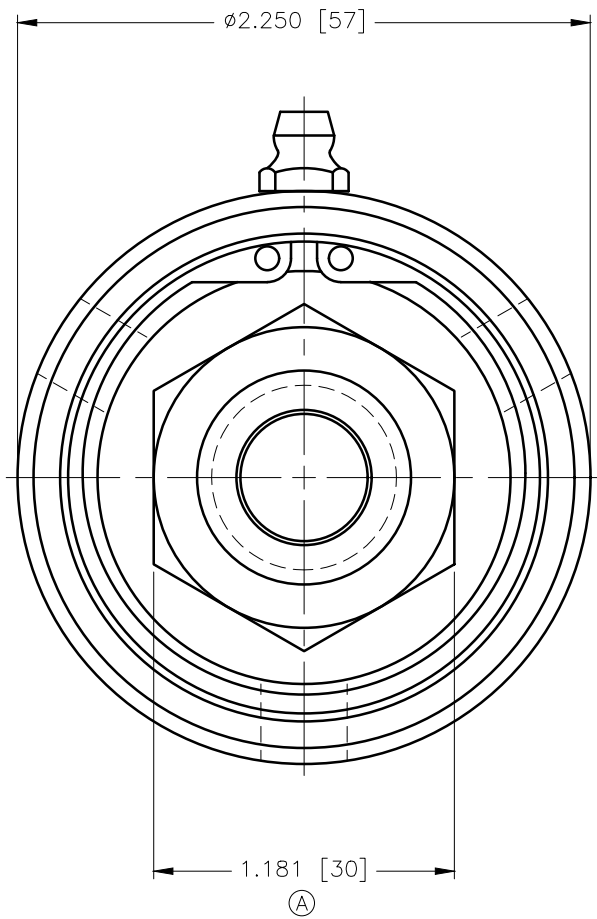

OPERATING DATA		
MEDIA	WATER, STEAM, OIL	
MAX WATER PRESSURE	750 PSI	50 bar
MAX INTERMITTANT SATURATED STEAM PRESSURE	15 PSI	1.0 bar
MAX OIL PRESSURE	100 PSI	6.6 bar
MAX WATER TEMP.	250°F	121°C
MAX OIL TEMP.	250°F	121°C
MAX SPEED	3500 RPM	3500/min

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

						SCALE	2:1	DWG SIZE	C	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE DIMENSIONS IN [] ARE IN MILLIMETERS.	 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.
						DRN	RM	08/06/08			
						ENGR	ARS	08/06/08			
						APPD					
						PART NO.				CUSTOMER	DWG. NO. C.A.D DRAWING
						155-139-152					
A	REVISED ROTOR HEX SIZE					028476	04/14	NR			
LET.	REVISION		ECO	DATE	SIGN						155-139-152

155-139-152