
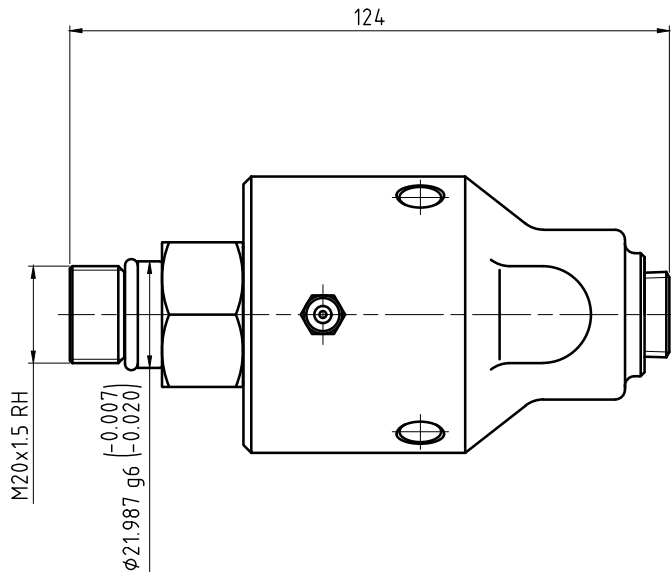
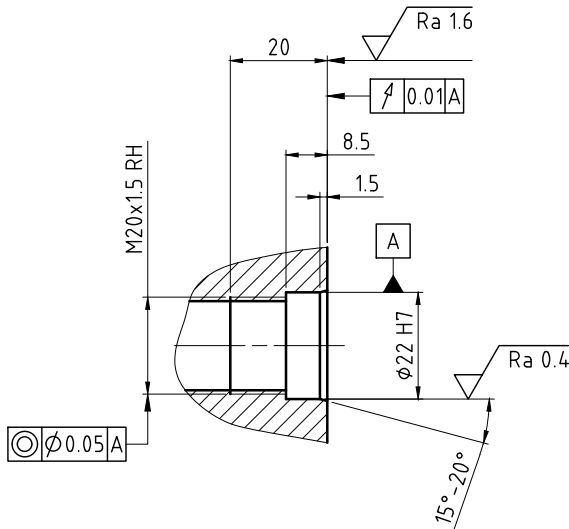
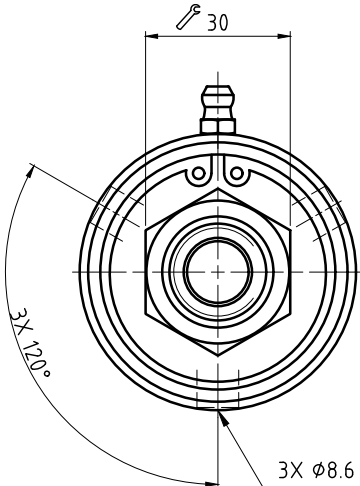
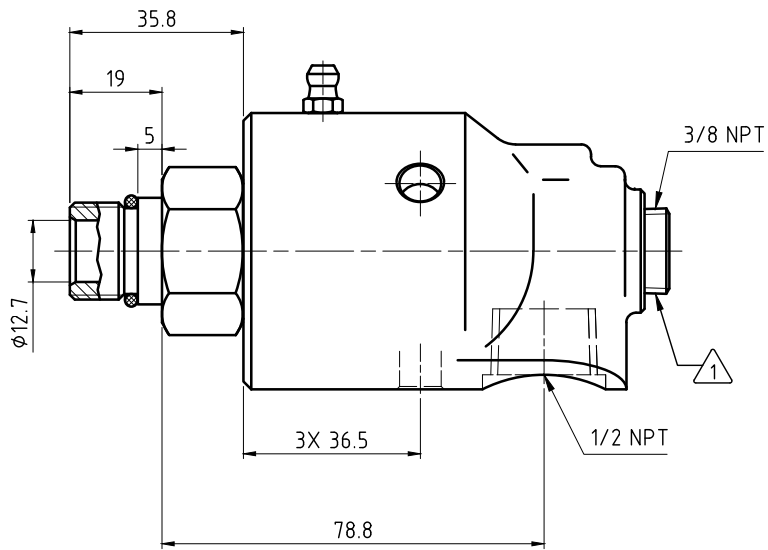



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

CHINA NOTES:

1 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.

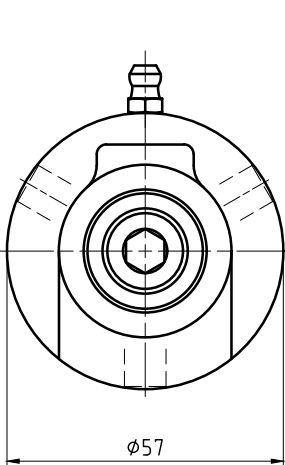

OPERATING DATA			
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	HOT OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹		
TEMPERATURE MAX.	120 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 1:1					
							MATERIAL:		INTERFACE CONTROL DRAWING			
					DATE	NAME	TITLE:					
					DRN.	04/01/14	N. Reyna	DEUBLIN UNION				
					ENGR.	04/01/14	T. Wilson					
					APPD.							
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE					NO.		SHEET
ISSUE	MODIFICATION	ECO	DATE	SIGN						155-000-738		A2