
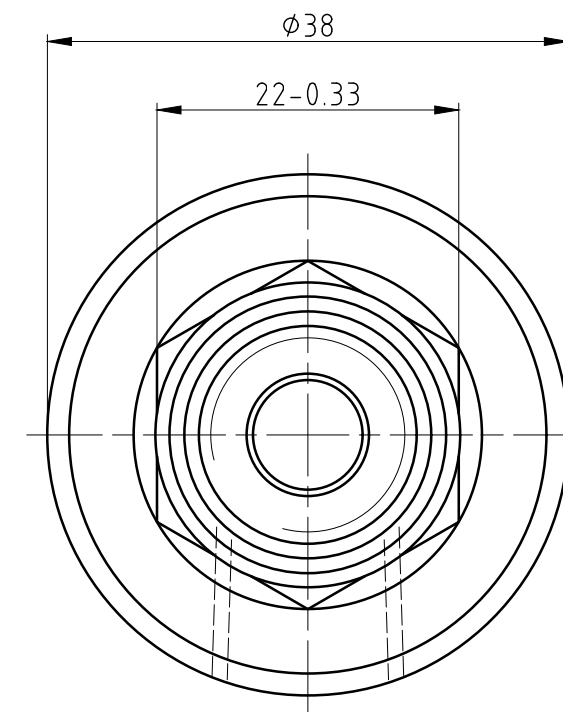
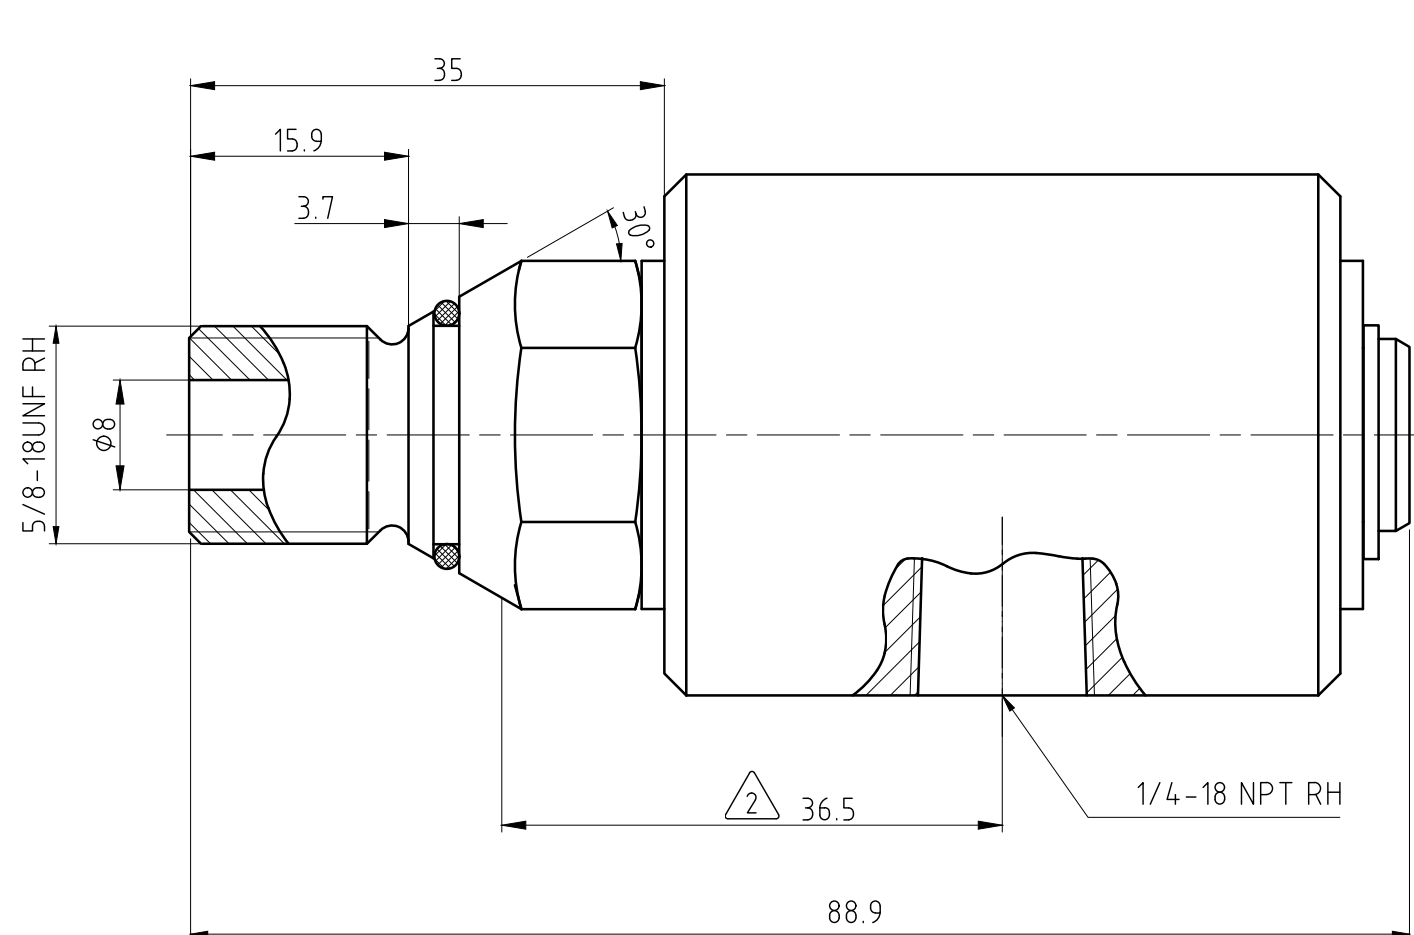


- NOTES:
- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
- 2 - APPROXIMATE DISTANCE TO LOCKUP.
- 3 - USE INSTALLATION INSTRUCTION 040-513.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



OPERATING DATA 1				
MEDIA		AIR	BRAKE FLUID	VACUUM
PRESSURE	MAXIMUM	10 bar	207 bar	6.7 kPa
	MINIMUM	5 °C	5 °C	5 °C
TEMPERATURE		250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
MAXIMUM SPEED				

 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.					PROJECTION: 		SCALE: 2:1	MATERIAL:	
					DATE	NAME	TITLE: INTERFACE CONTROL DRAWING 17 UNION, 5/8-18 TAPERED PILOT RTR		
					DRN.	05/19/2009		galindolm	
					ENGR.				
					APPD.				
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE			NO. 17-086-023060	SHEET A3
A	REDRAWN IMS STD	005890	05/09	LG					
ISSUE	MODIFICATION	ECO	DATE	SIGN					