NOTES:
1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1005–020–055.

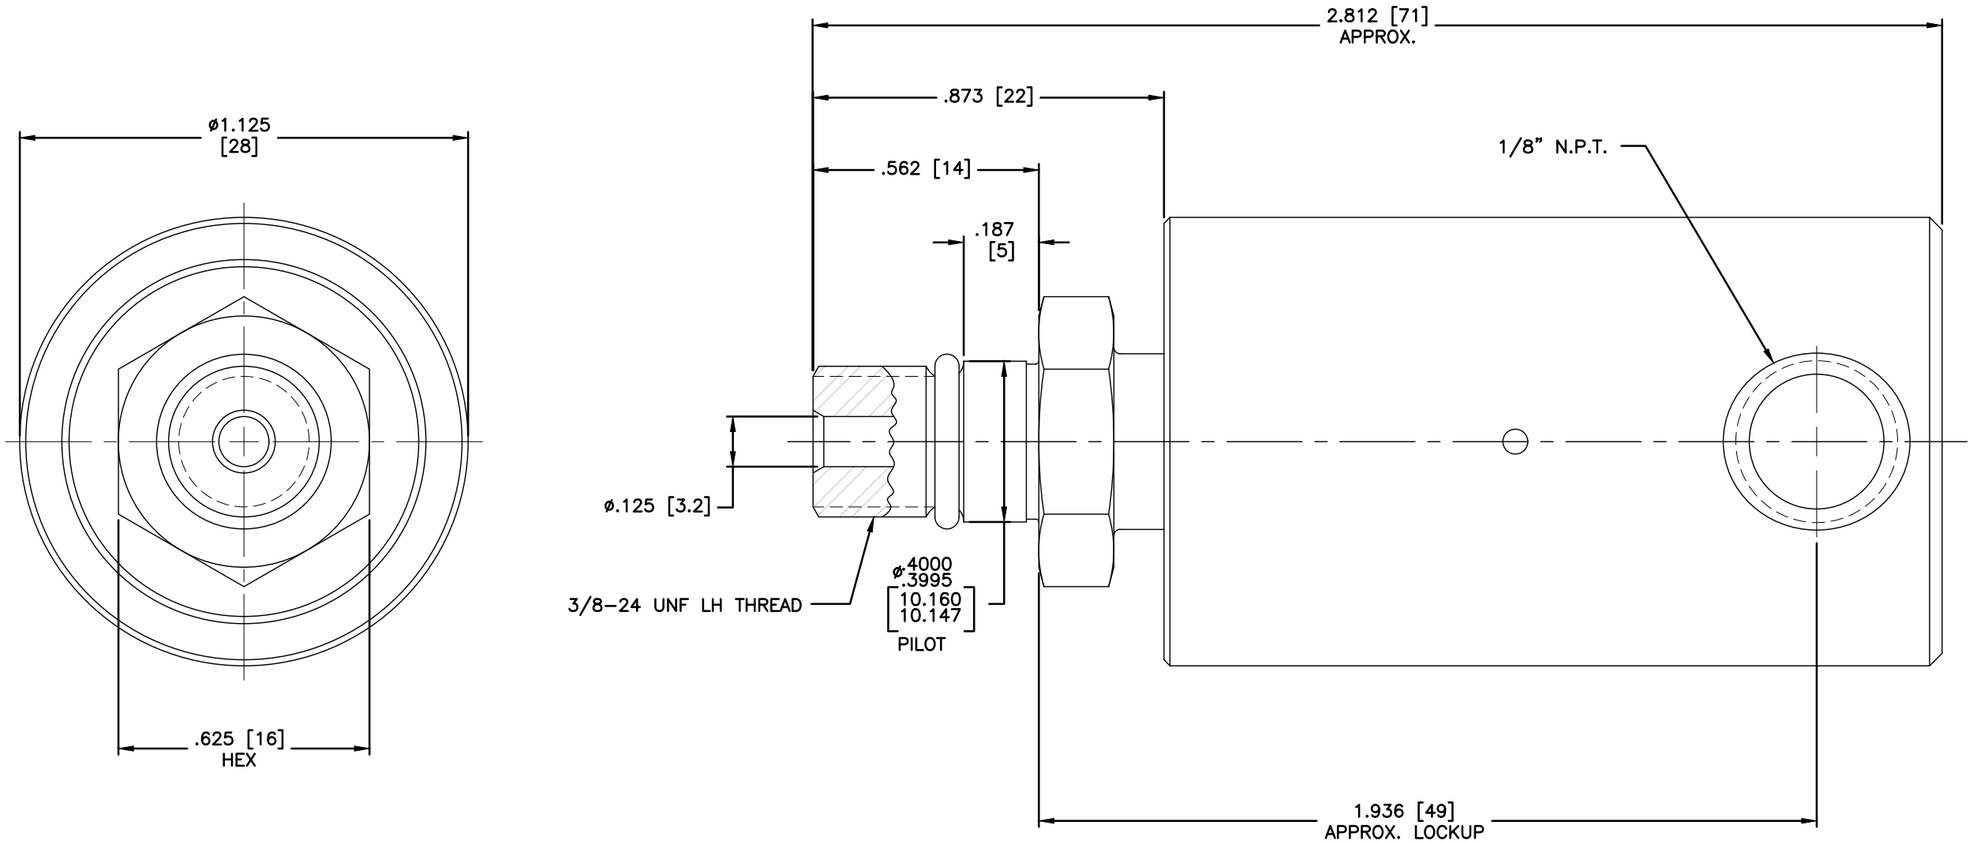

OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX VACUUM	28" Hg	6.7 kPa
MAX HYD. PRESSURE	1000 PSI	70 bar
MAX SPEED	3500 RPM	3500/min
MAX TEMPERATURE	250°F	121°C

CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF THE DEUBLIN COMPANY.

LET.	REVISION	ECO	DATE	SIGN

EQUIPMENT REF:

ASSY/TEST FIXTURES REQUIRED:

UNLESS OTHERWISE SPECIFIED TOLERANCES ±.010.
DIMENSIONS IN [ ] ARE IN MILLIMETERS.

SCALE	4:1	DWG SIZE C
DRN	RM	02/25/03
ENGR	RC	02/25/03
APPD	RC	02/25/03

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL DRAWING FOR UNION 1005–020–055

NO. 1005–020–055–IC C.A.D DRAWING