
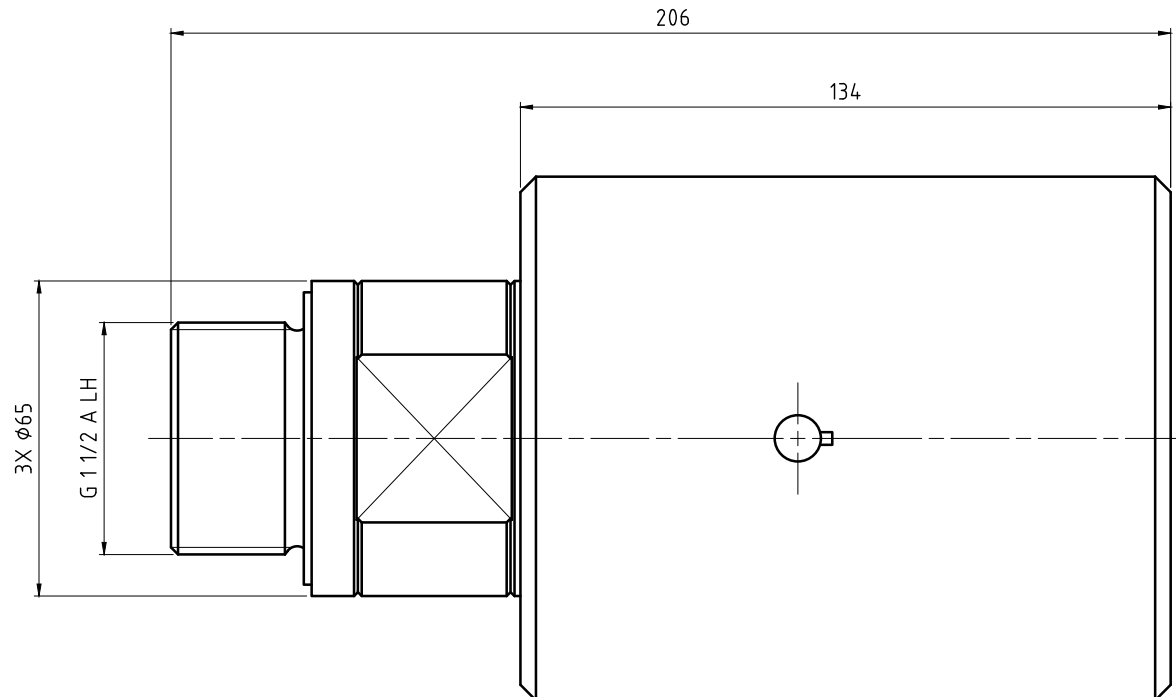
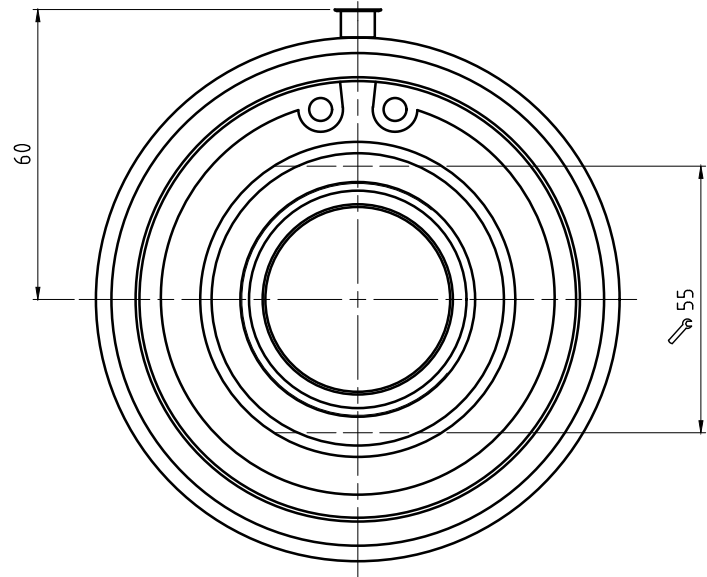
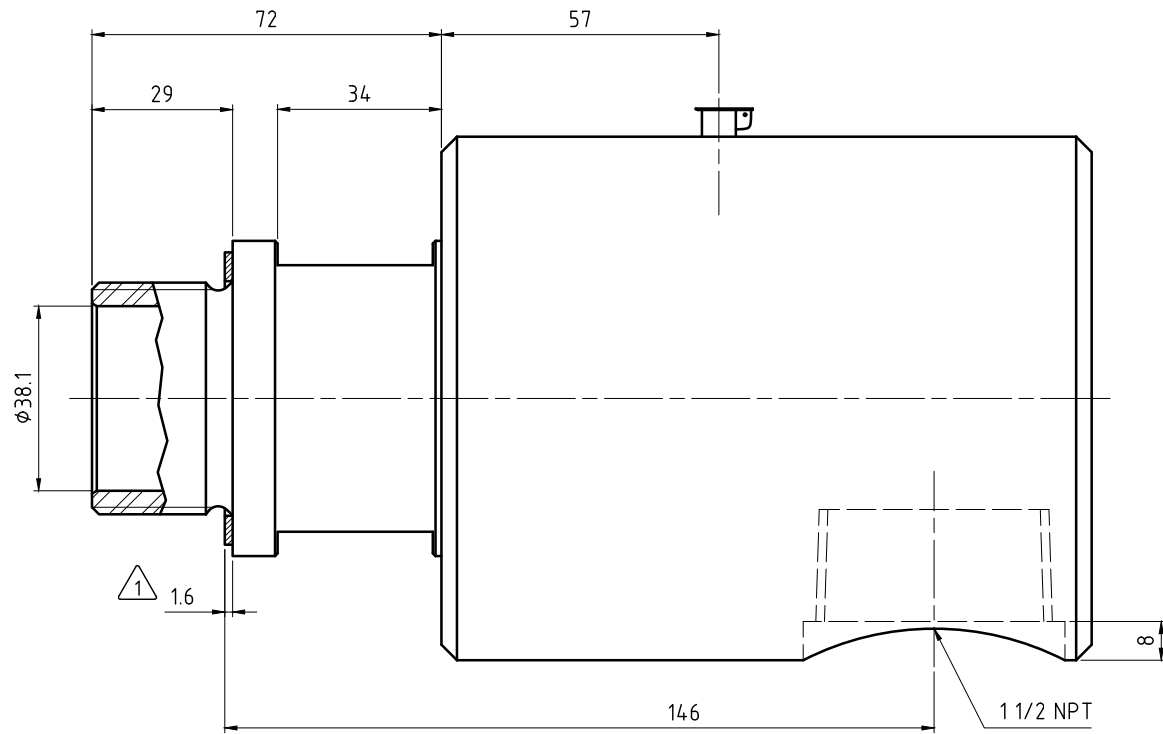
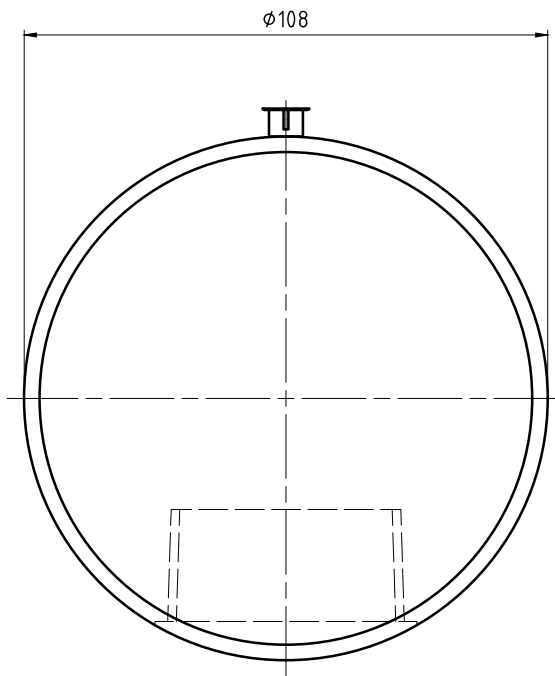


NOTES:
△1 - GASKET THICKNESS.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.



OPERATING DATA	
MEDIA	HYDRAULIC OIL / COMPRESSED AIR
MAX. PRESSURE HYDRAULIK OIL	50 bar
MAX. PRESSURE COMPRESSED AIR	10 bar
MAX. VACUUM	6,7 kPa
MAX. TEMPERATURE	120 °C
MAX. SPEED	2500 1/min

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 1:1				
							MATERIAL:		INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE:				
					DRN.	10/10/17	N. Reyna	DEUBLIN UNION			
					ENGR.	10/10/17	S. Stasi				
					APPD.						
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE		NO.			SHEET	
ISSUE					MODIFICATION		ECO		DATE		SIGN
									452-000-199		A2