


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.




OPERATING DATA:

AIR-VACUUM-HYDRAULIC SERVICE
150 P.S.I. (10bar) MAX.AIR PRESSURE
28" Hg (94.8KPa) MAX.VACUUM PRESSURE
1000 P.S.I. (66,6bar) MAX.HYDRAULIC PRESSURE
3500 R.P.M. (3500/MIN) MAX.SPEED
250°F (121°C) MAX.TEMPERATURE

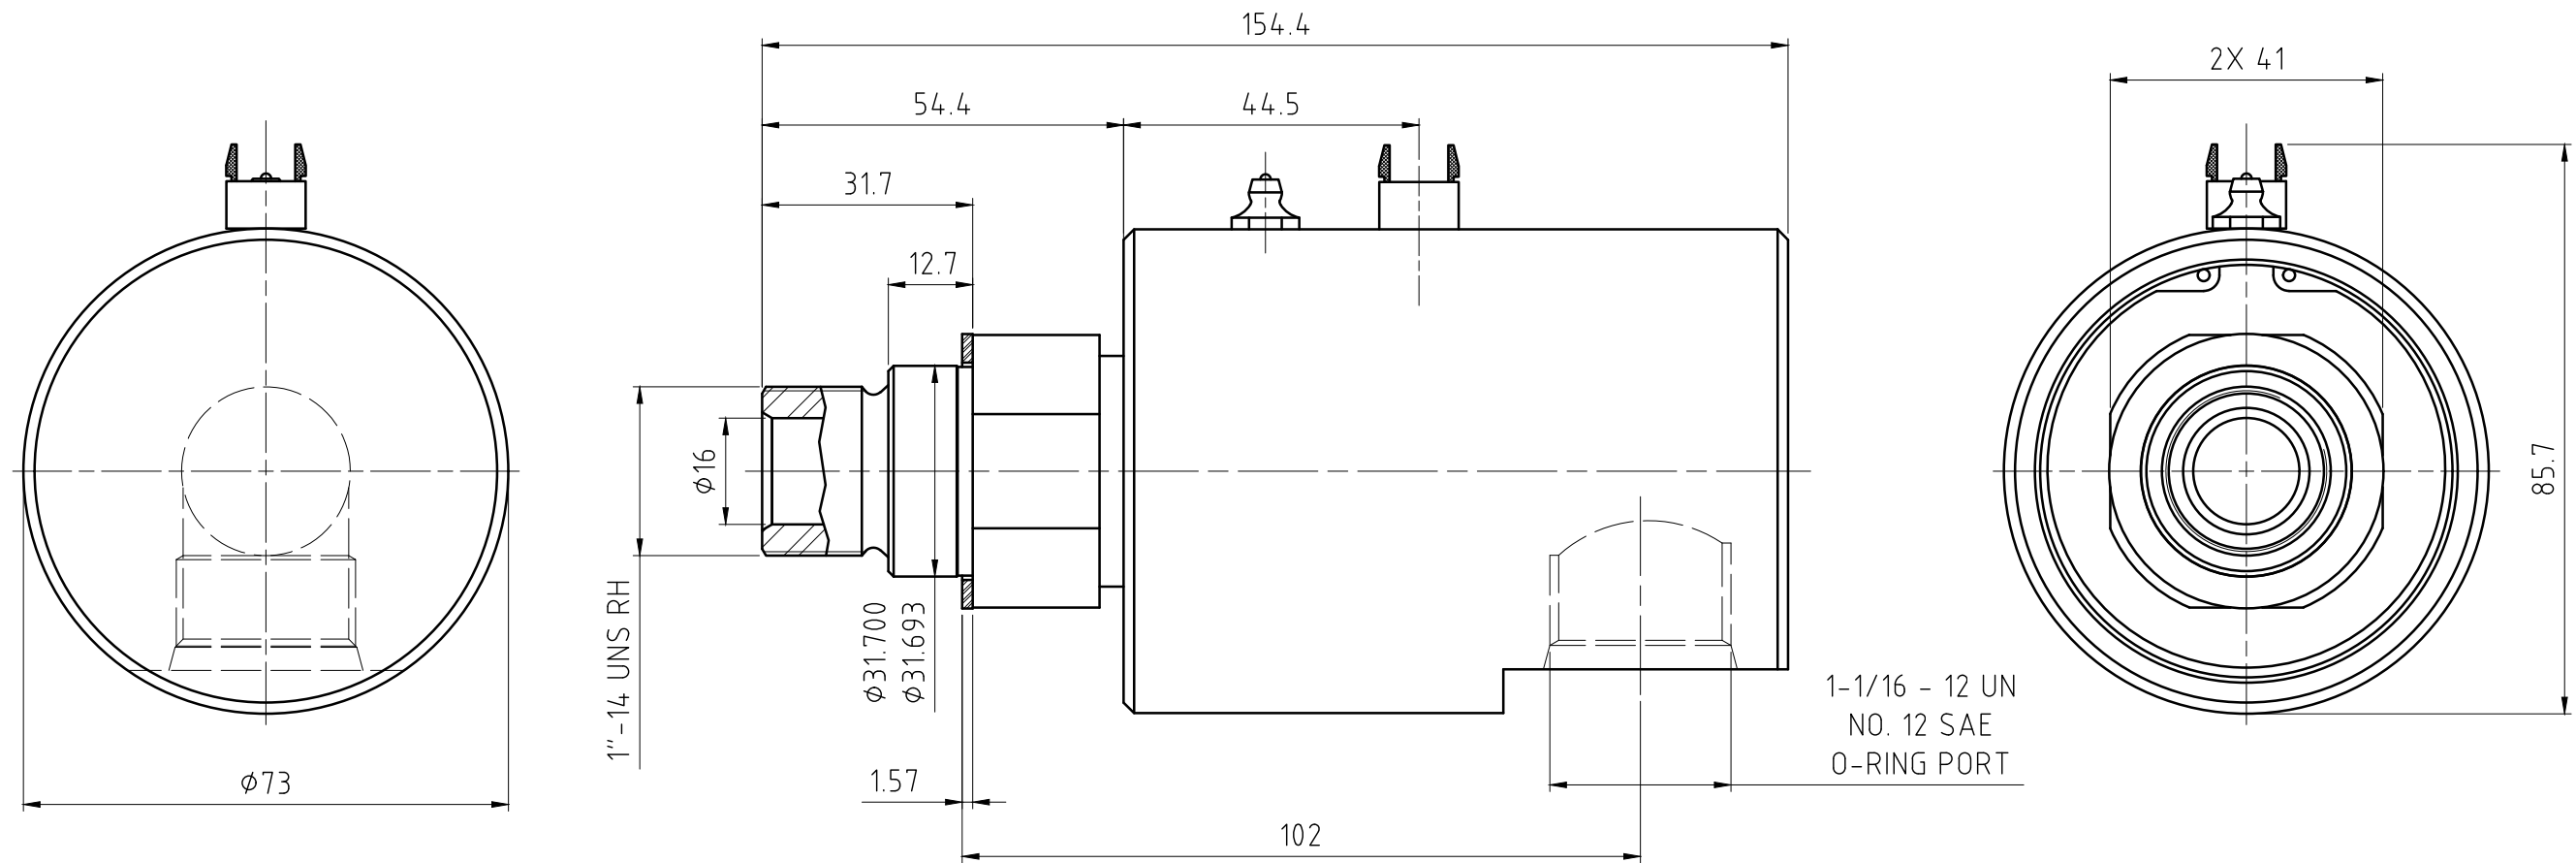

PROJECTION:



SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE:

DEUBLIN UNION

NO.

250-997-016

SHEET
A3

A	UPDATED TO IMS	020217	01/13	RA
ISSUE	MODIFICATION	ECO	DATE	SIGN

GENERAL TOLERANCES: ISO 2768 - mK
EDGES OF UNDEFINED SHAPE: ISO 13715

Permissible deviation for basic size range

Tolerance class	up to 3	over 3 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 400	over 400 up to 1000	over 1000 up to 2000	over 2000 up to 4000
DIN ISO 2768-m	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2