
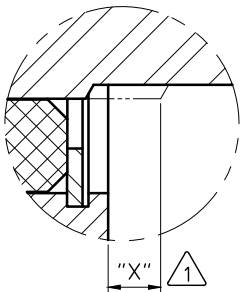
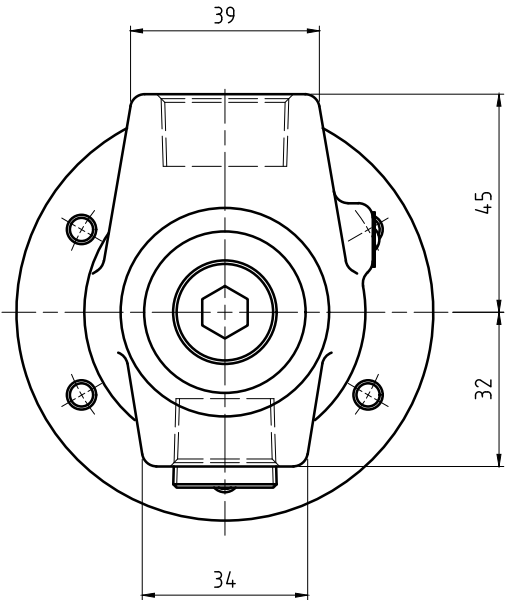
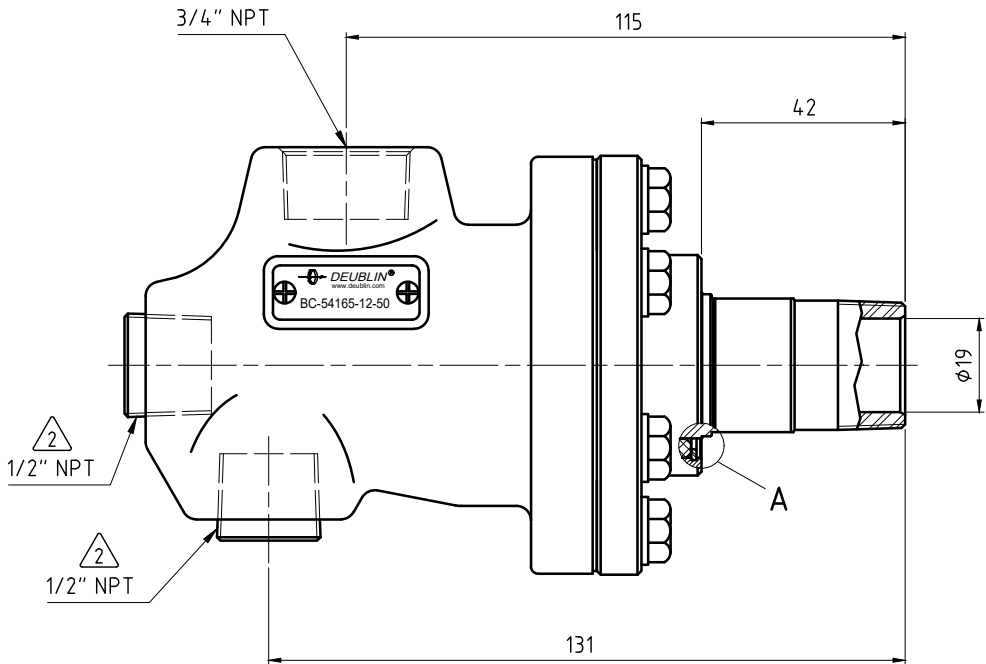



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
- 2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

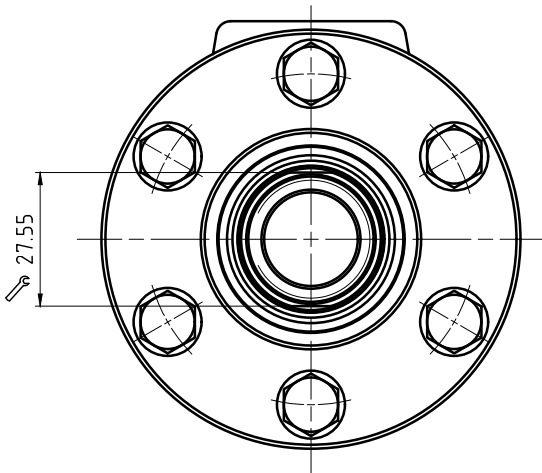


"X" SEAL WEAR DETAIL
A (4:1)

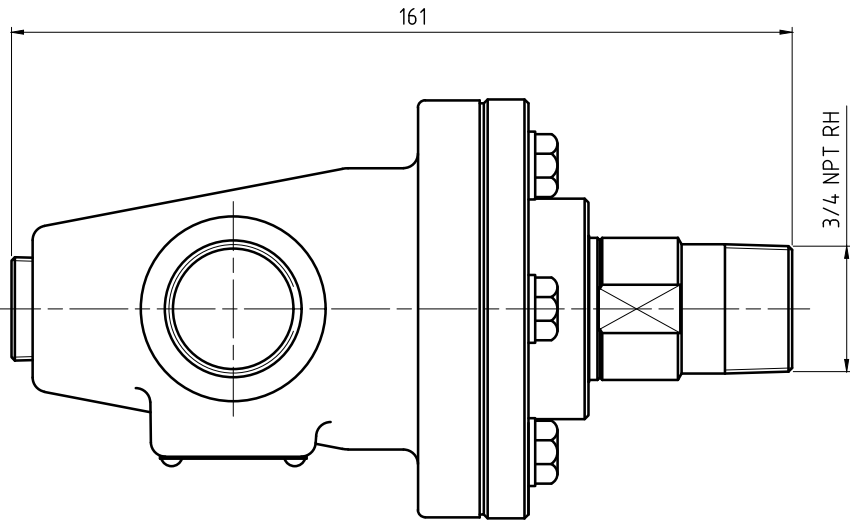

OPERATING DATA

MEDIA		STEAM	WATER
PRESSURE	MAXIMUM	8.6 bar	20.6 bar
TEMPERATURE	MAXIMUM	178 °C	178 °C
SPEED	MAXIMUM	200 min ⁻¹	200 min ⁻¹
DRY RUN		NO	NO

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 1:1		MATERIAL: INTERFACE CONTROL DRAWING		A	
					DATE	NAME	TITLE:					
					DRN. 04/17/18	N. Reyna	UNION TYPE C FIXED SIPHON NPT PORTS 3/4 NPT RH ROTOR					
					ENGR. 04/17/18	T. Wilson						
					APPD.							
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE					NO.	BC-54165-12-50	SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN								