

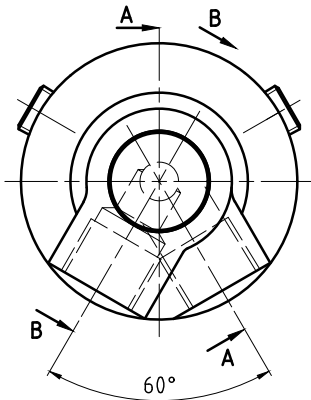


NOTES:



- 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-550
2 - PIPE SUPPLIED BY CUSTOMER.
3 - PIPE LENGTH.
4 - DEPENDING ON COUNTRY OF ORIGIN, HEX STOCK MAY VARY AS NOTED. SEE TABLE
FOR ACCEPTABLE WRENCH SIZES.
A 5 - GASKET THICKNESS.

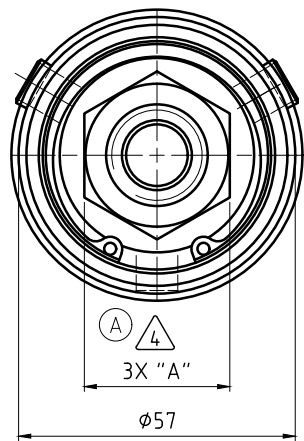

VIEW A - A

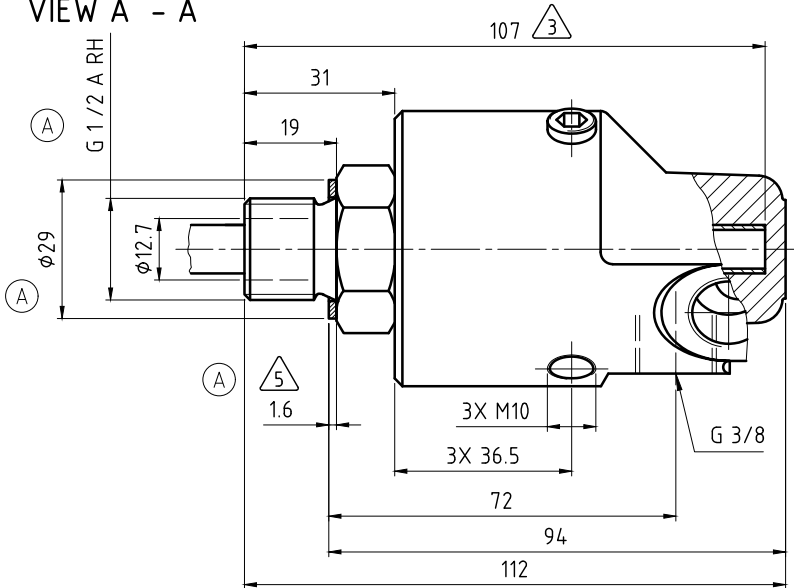

VIEW B - B

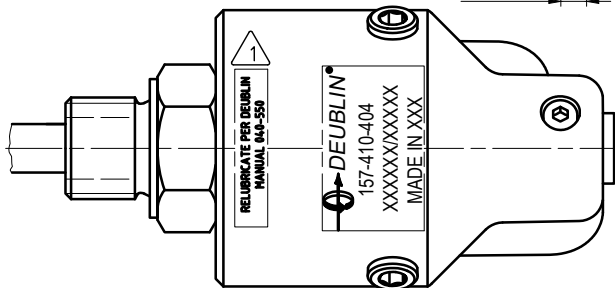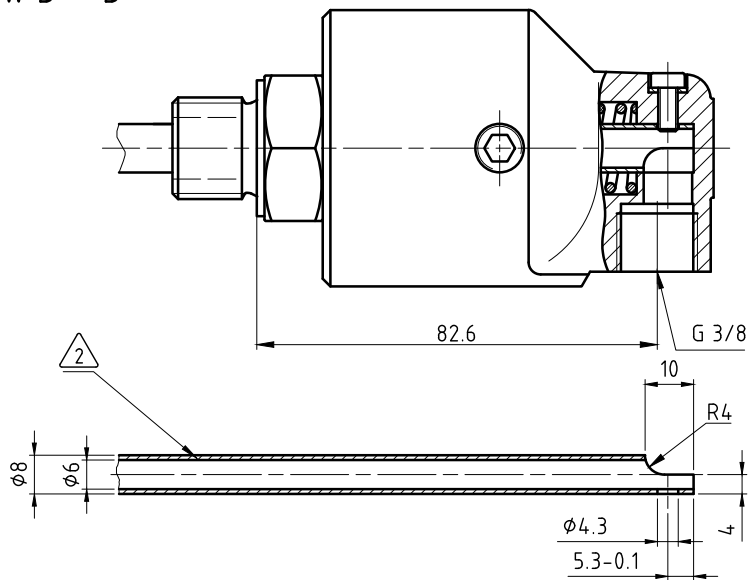

A OPERATING DATA			
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	THERMAL OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹		
TEMPERATURE MAX.	121 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		
RECOMMENDED FILTRATION	60 micron		

4 HEX SIZES		WRENCHES	
UNITS	"A"	30mm	1 1/8"
METRIC [mm]	30-0.13	✓	✗
IMPERIAL [in]	1.125-0.006	✓	✓



PROJECTION:

SCALE: 1:1

MATERIAL:

INTERFACE CONTROL DRAWING

TITLE:

DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO.

157-410-404

SHEET

A2

ISSUE	MODIFICATION	ECO	DATE	NR	SIGN
A	SEE CO	60371	04/21	NR	
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE					