
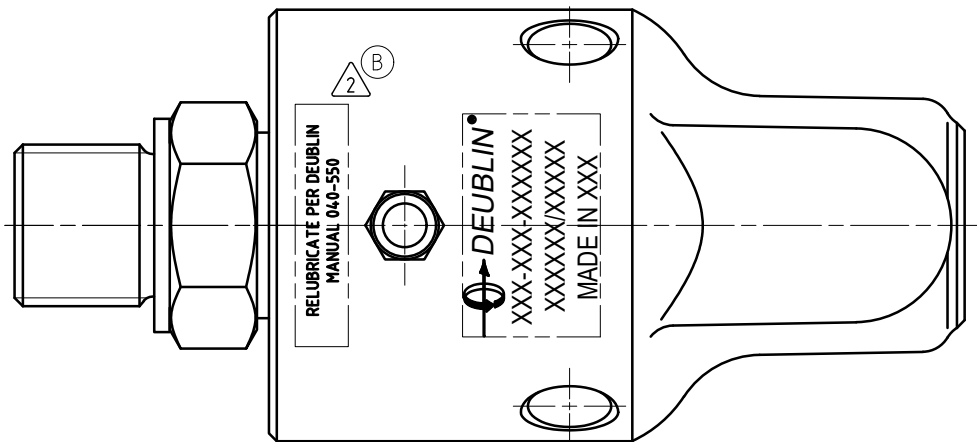
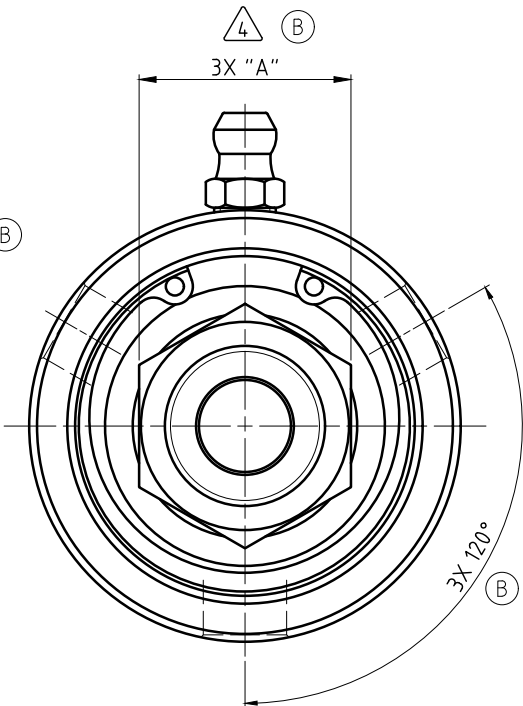
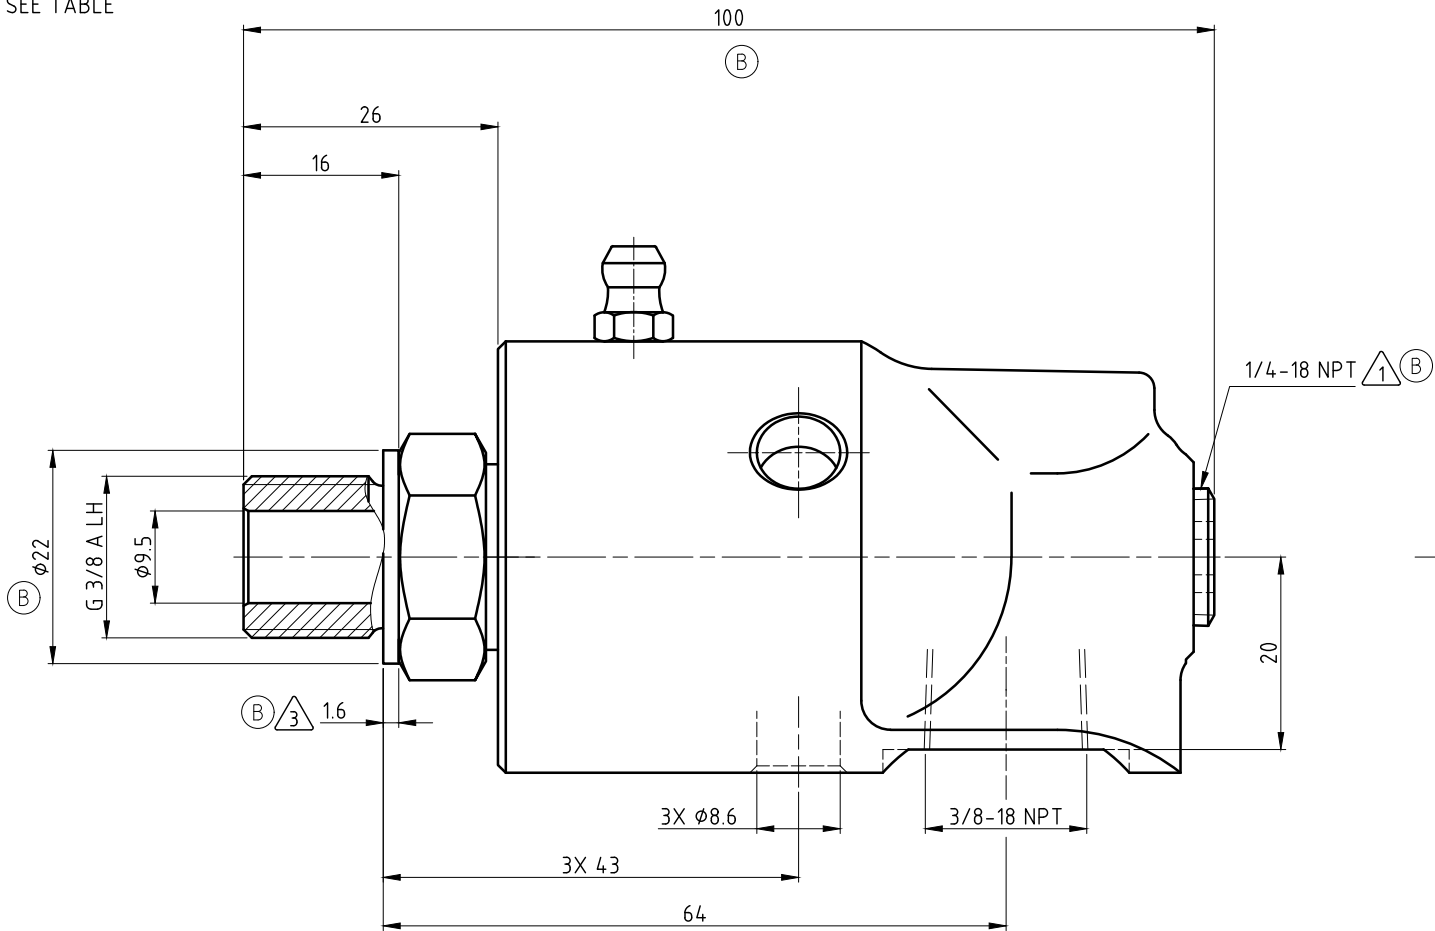


NOTES:

- 1 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
- 2 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM FOR INSTRUCTION MANUAL: 040-550
- 3 - GASKET THICKNESS. (B)
- 4 - DEPENDING ON COUNTRY OF ORIGIN, HEX STOCK MAY VARY AS NOTED. SEE TABLE FOR ACCEPTABLE WRENCH SIZES. (B)

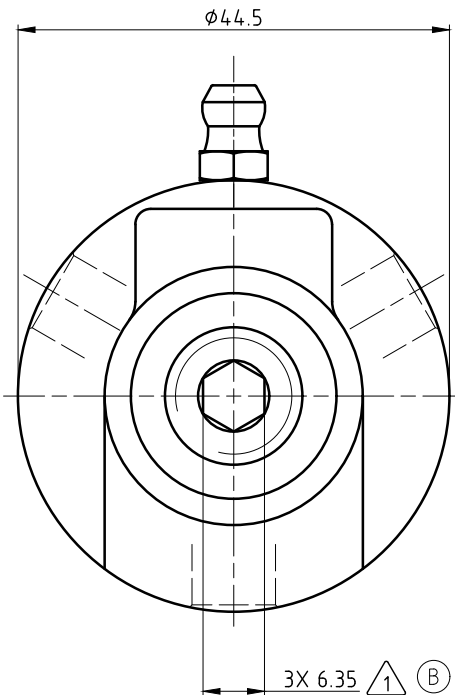

OPERATING DATA

MEDIA	WATER	THERMAL OIL
PRESSURE MAX.	50 bar	6.6 bar
SPEED MAX.	3500 min ⁻¹	
TEMPERATURE MAX.	93 °C	
DRY RUN (WITHOUT ANY MEDIA)	NO	
RECOMMENDED FILTRATION	60 micron	

4

B

HEX SIZES		WRENCHES	
UNITS	"A"	22mm	7/8"
METRIC [mm]	22-0.33	✓	✓
IMPERIAL [in]	22.23-0.013	✗	✓



SCALE: 2:1	TITLE: DEUBLIN UNION
MATERIAL: INTERFACE CONTROL DRAWING	
NO. 57-050-095	

DATE	NAME
DRN. 17.11.2015	MV
ENGR. 17.11.2015	CW
APPD.	

B	SEE CO	60034	1/21	MTS
A	SEE ECO	056336	05/20	MTS
ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SHEET A2