
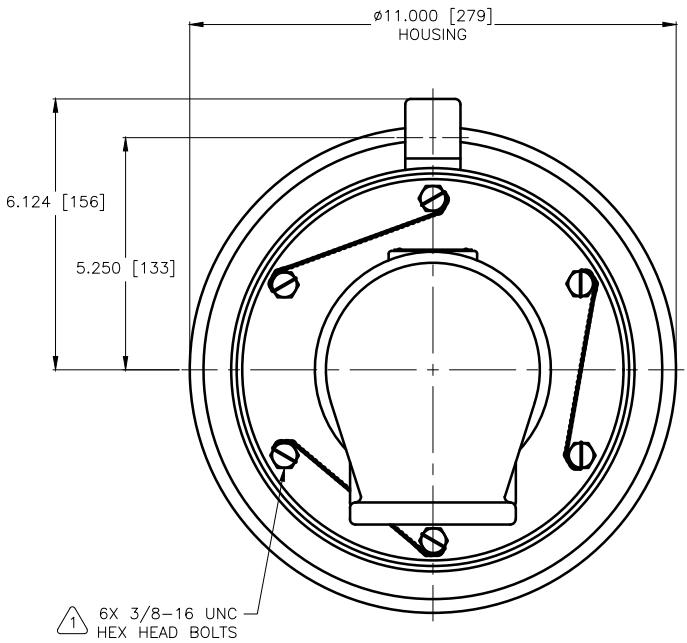
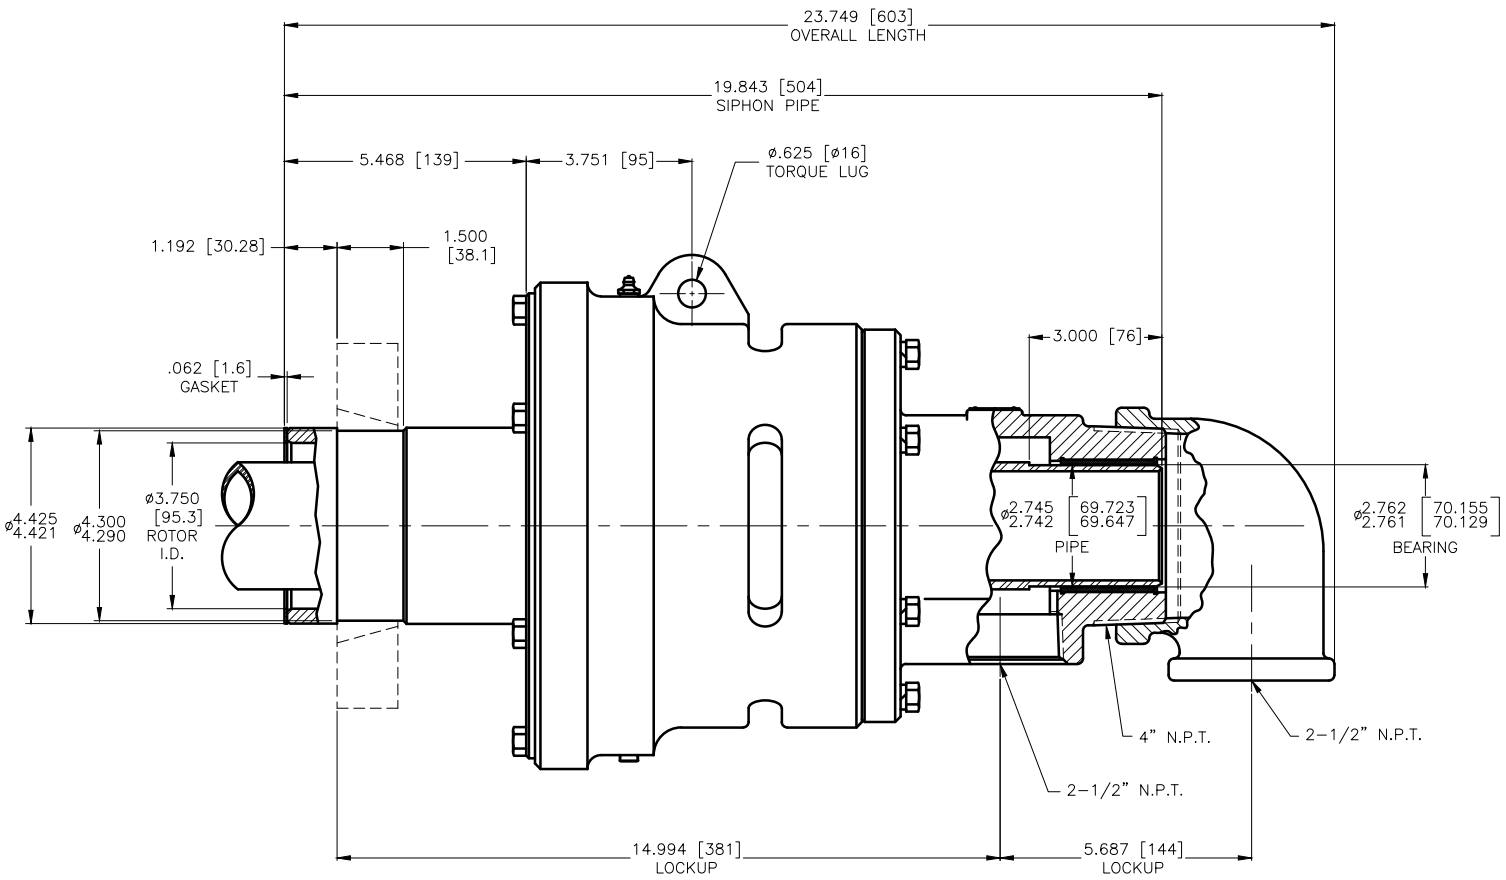


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION OF DEUBLIN COMPANY.
COPYING, USE, TRANSMISSION, DISTRIBUTION, AND
DISCLOSURE ARE SUBJECT TO THE TERMS AND
CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1- TORQUE BOLTS TO 20-30 FT-LBS (27-41 Nm) AND SAFETY WIRE.

OPERATING DATA:
WATER SERVICE
150 P.S.I.(10 BAR) MAX.
750 R.P.M.(750/MIN) MAX.
250°F.(121°C) MAX.
TORQUE AT 150 P.S.I.=10 FT.LBS.
FLOW RATE = 300 GPM

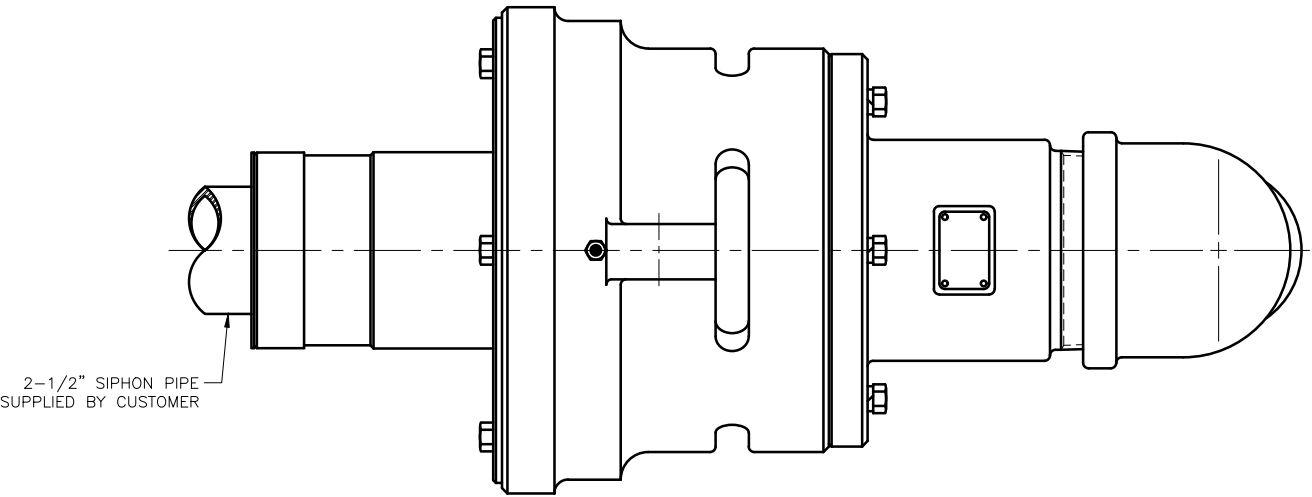

				SCALE: 6"=1'0" SEE		 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.
DRN		NR	05/22/09	UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE		
ENGR		TW	05/22/09	DIMENSIONS IN [] ARE IN MILLIMETERS.		
APPD		TW	05/22/09			
				PART NO. 6400-031-423		TITLE: INTERFACE CONTROL DRAWING OF DEUBLIN UNION 6400-031-423
				CUSTOMER		
LET.	REVISION	ECO	DATE	SIGN	DWG NO. 6400-031-423 C.A.D. DRAWING	