


CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

ROTOR THREAD Rotorgewinde A	RTR.	ORDERING NO. Bestell-Nr.
G 1 A RH	-222	355-000-222-255
G 1 A LH	-223	355-000-223-255

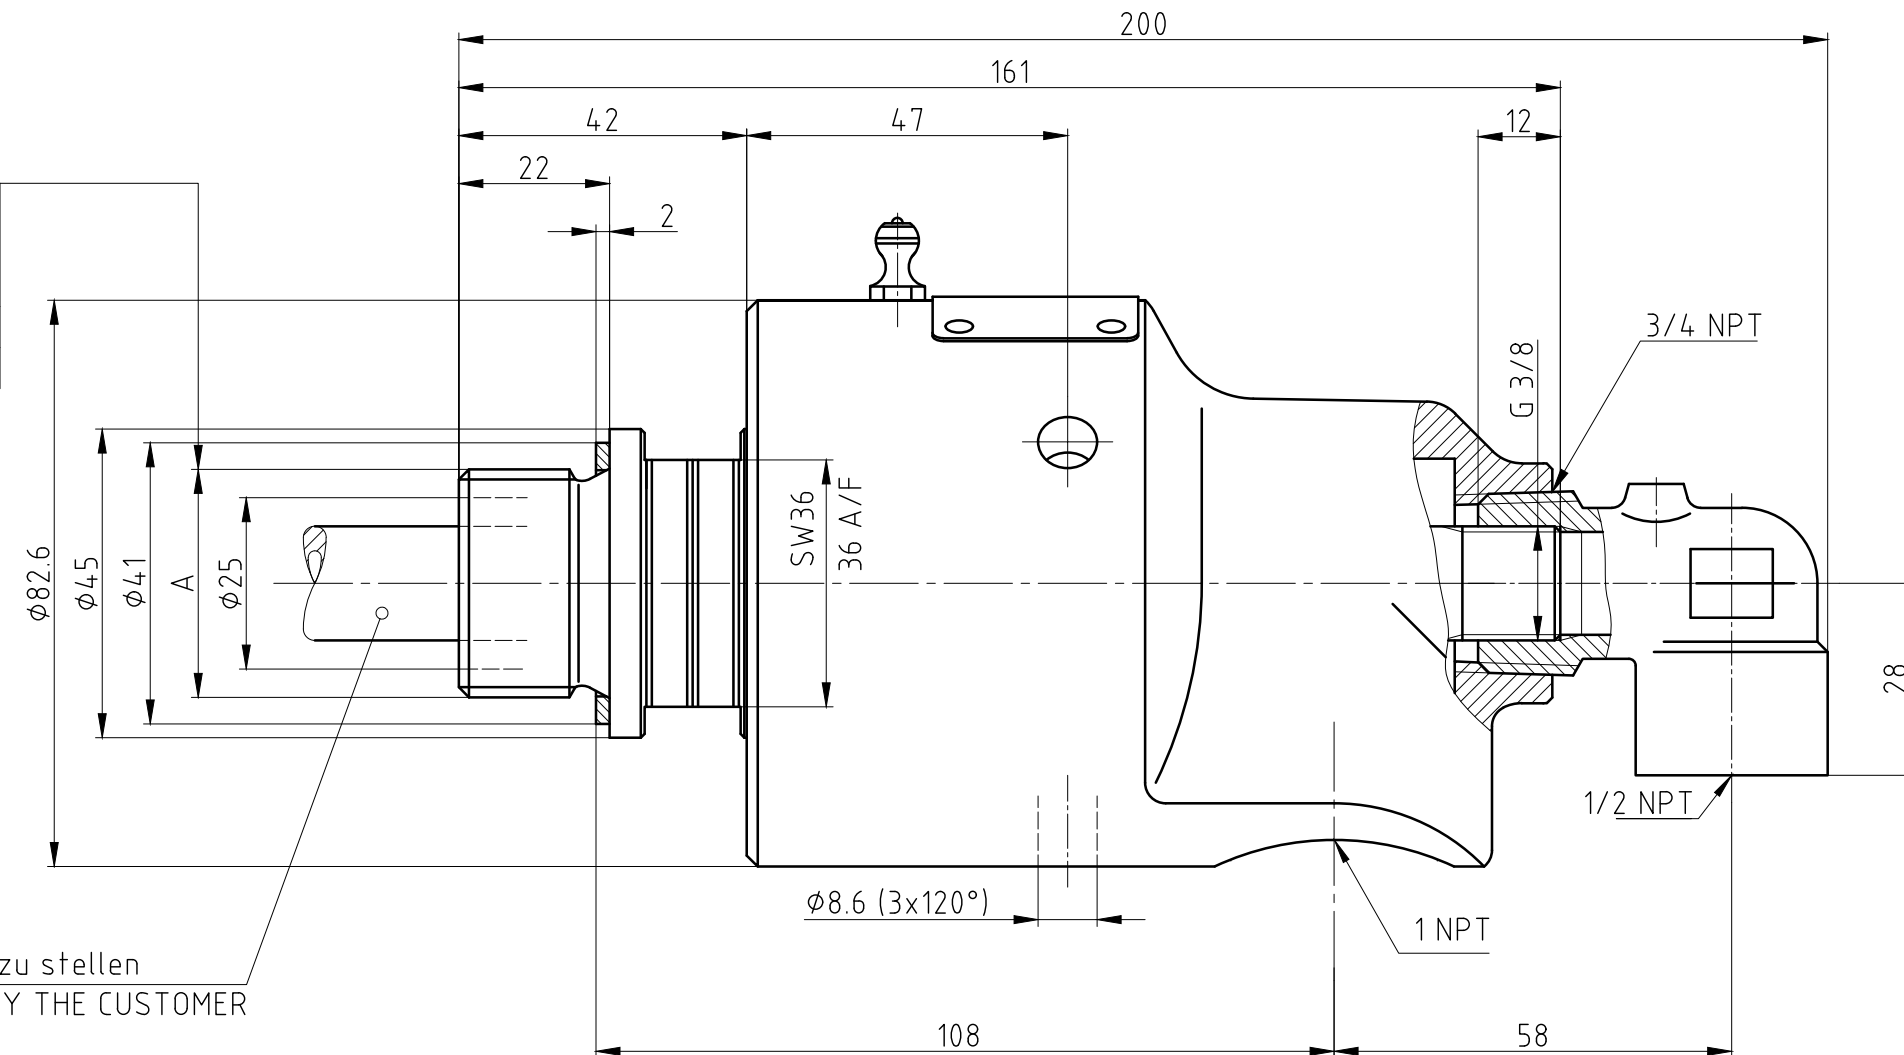


Siphonrohr vom Kunden zu stellen
SIPHON PIPE SUPPLIED BY THE CUSTOMER

OPERATING DATA / Betriebsdaten


MEDIA Medium	WATER	Wasser	SATURATED STEAM	Sattdampf	HOT OIL	Thermoöl
MAXIMUM PRESSURE Max. Druck	750 PSI *	50 bar *	14 PSI (INTERMITTENT)	1 bar (kurzzeitig)	100 PSI	6.5 bar
MINIMUM OPERATING TEMPERATURE Min. Betriebstemperatur	. °F	. °C	. °F	. °C	. °F	. °C
MAXIMUM OPERATING TEMPERATURE Max. Betriebstemperatur	250 °F	120 °C	250 °F	120 °C	250 °F	120 °C
MAXIMUM SPEED Max. Drehzahl	3000 RPM	3000 min ⁻¹	3000 RPM	3000 min ⁻¹	3000 RPM	3000 min ⁻¹
FILTRATION Filterung	60 µm	60 µm	60 µm	60 µm	60 µm	60 µm
DRY RUN (WITHOUT ANY MEDIA) Trockenlauf (ohne Medium)	NO	nein	NO	nein	NO	nein

* PRESSURES EXCEEDING 115 PSI ONLY PERMISSABLE WITH COLD WATER (MAX. 120°F)
Drücke über 8 bar nur in Verbindung mit Kaltwasser (max. 50°C) zulässig!



DEUBLIN GmbH
D-65719 HÖFHEIM-WALLAU, GERMANY

PROJECTION:



SCALE:	1:1	Z:\ \UNION\
--------	-----	-------------

MATERIAL:

TITLE:

DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

	NO.
--	-----

355-000-222+223-255-DD

SHEET

a	Redrawn	06034	23.03.06	Wol
	Operating data changed			
ISSUE	MODIFICATION	ECO	DATE	SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE