

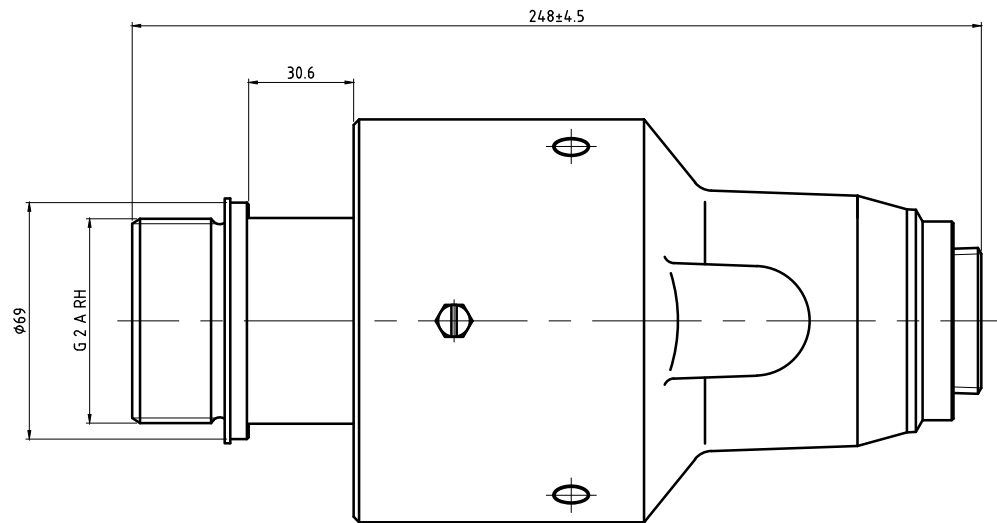
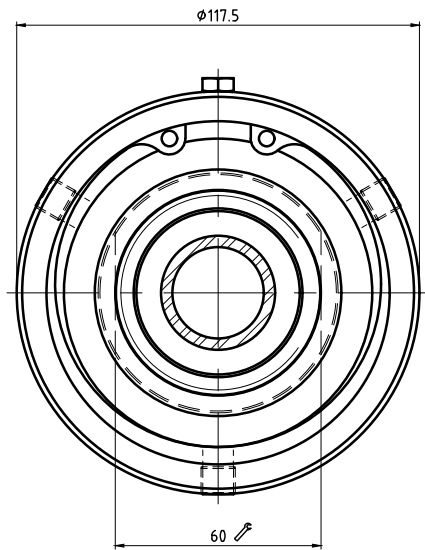


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, REPRODUCTION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:
1 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
2 - GASKET THICKNESS.

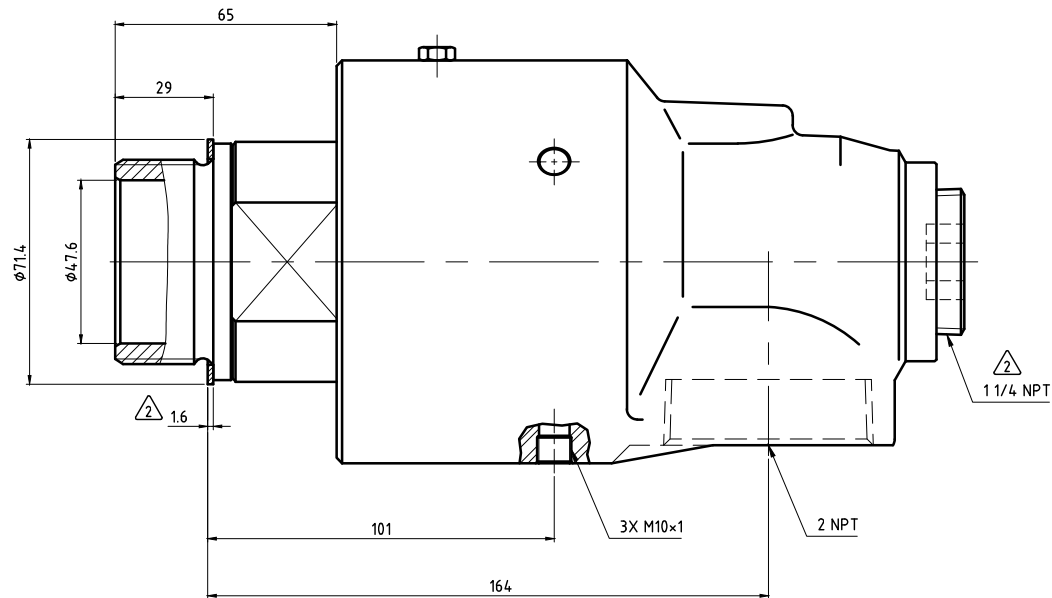

OPERATING DATA	
MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	750 min ⁻¹
TEMPERATURE MAX.	90 °C
DRY RUN (WITHOUT ANY MEDIA)	NO

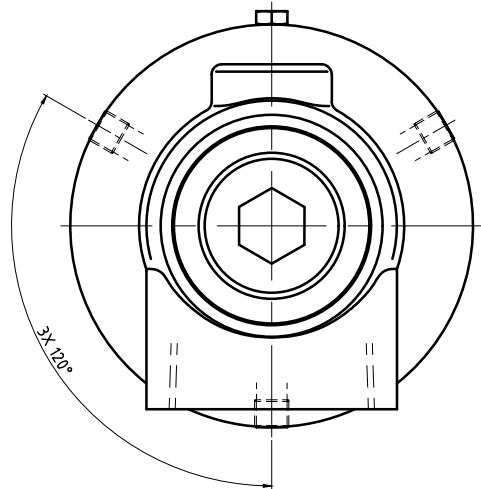

DATE	NAME
DRN: 09/17/14	N. Reyna
ENGR: 09/17/14	T. Wilson
APPD:	

DATE	NAME
DRN: 09/17/14	N. Reyna
ENGR: 09/17/14	T. Wilson
APPD:	

SCALE: 1:1	TITLE: DEUBLIN UNION
MATERIAL: INTERFACE CONTROL DRAWING	NO. 657-276-124
	SHEET A2

UNLESS SPECIFICALLY TOLERANCES, ALL DIMENSIONS ARE CONSIDERED REFERENCE