
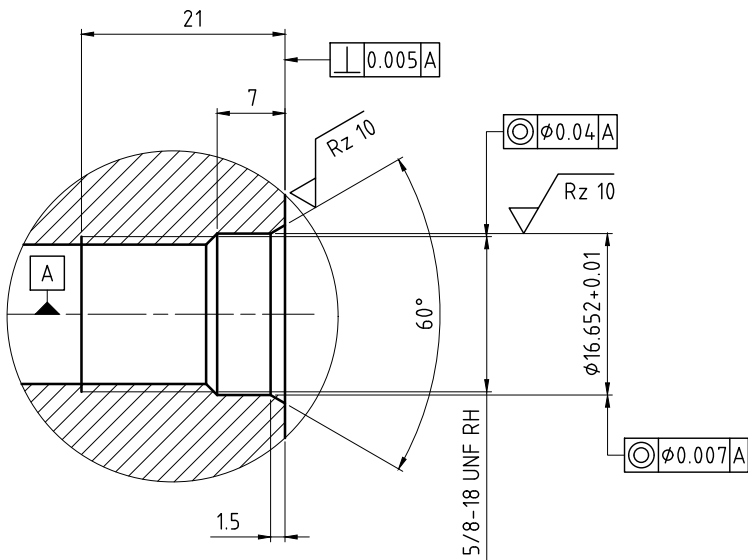
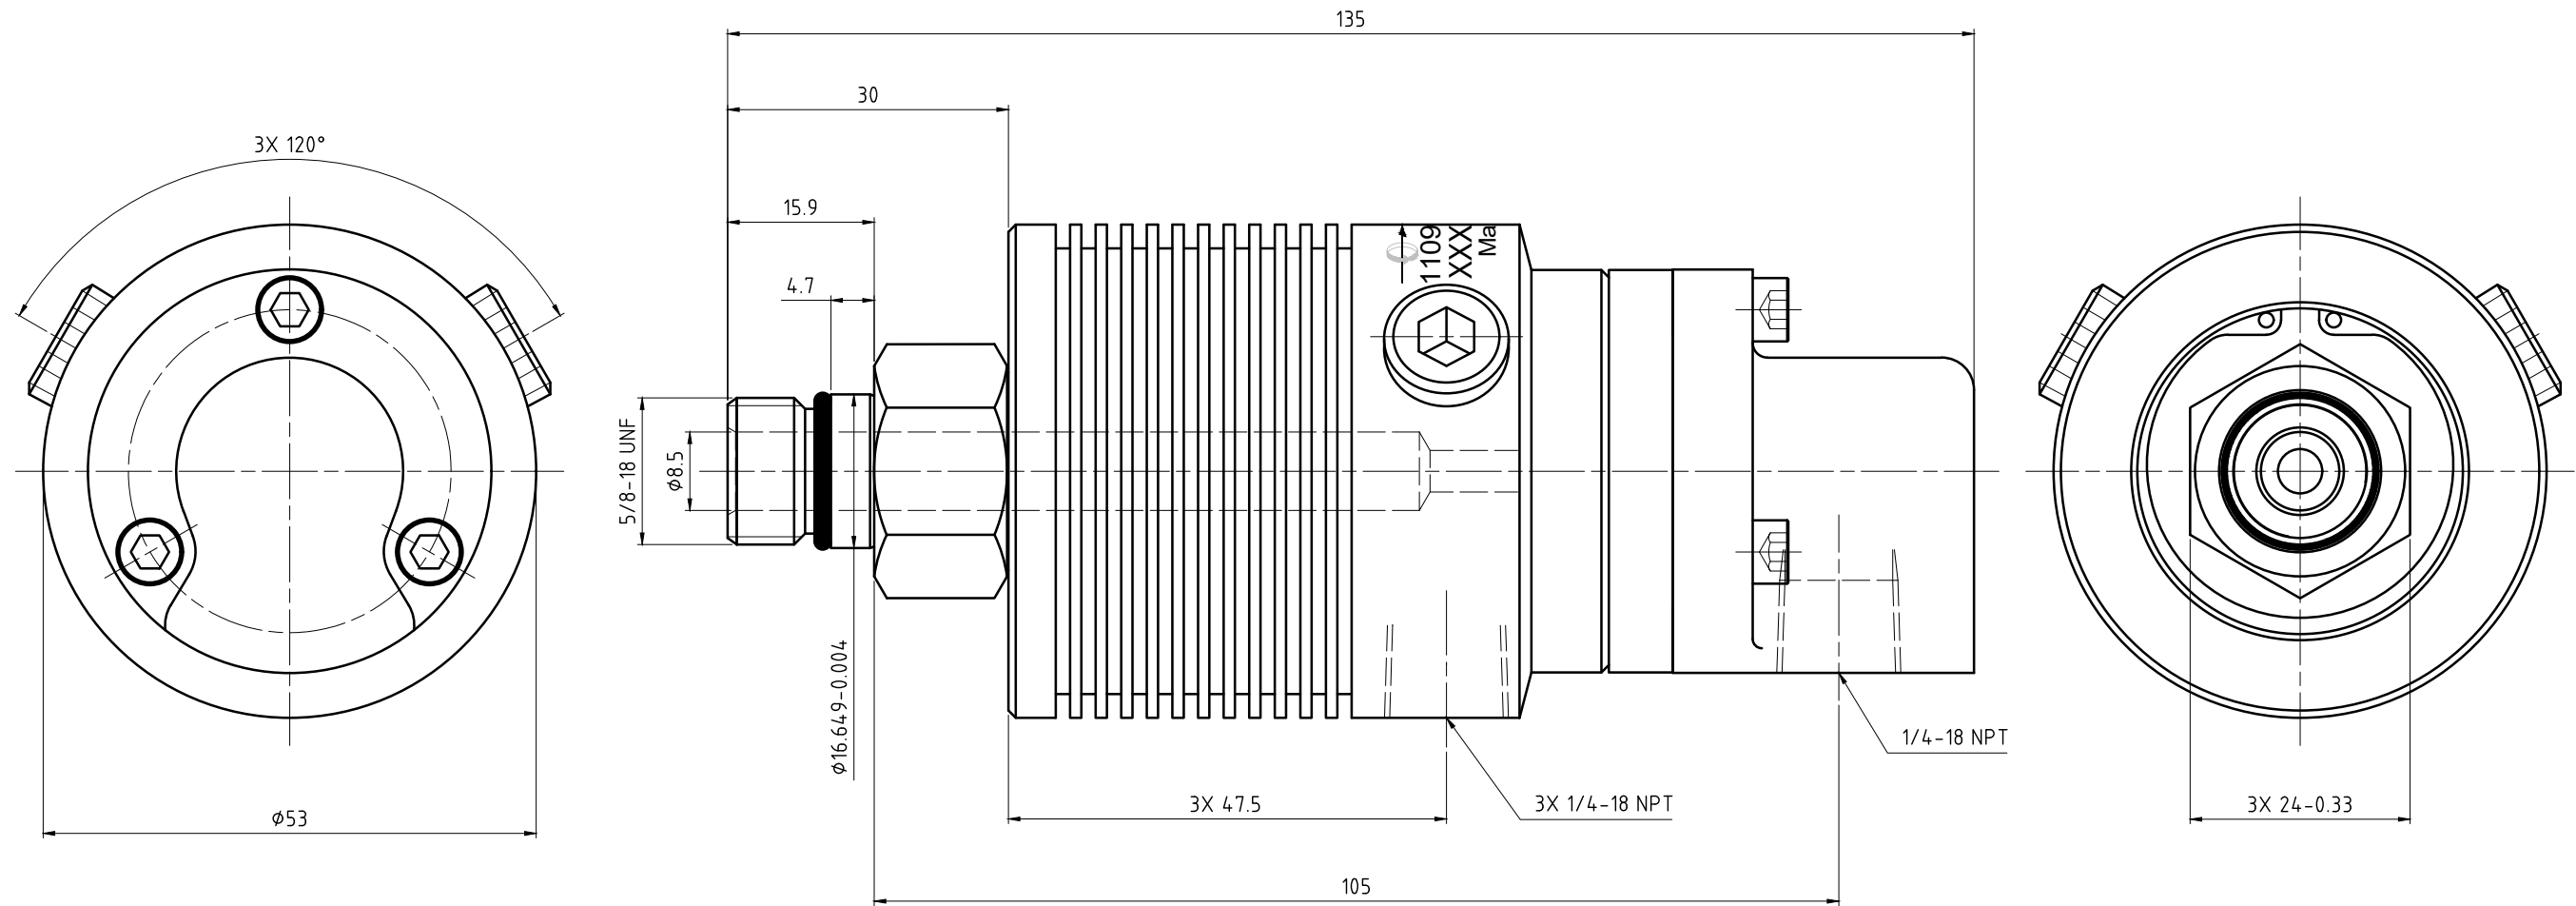


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO
THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH
DEUBLIN COMPANY. ALL RIGHTS RESERVED.



CUSTOMER INTERFACE

OPERATING DATA			
MEDIA		COOLANT	MQL
MEDIA PRESSURE	MAXIMUM	140 bar	10 bar
	MINIMUM	1 bar	1 bar
FLOW RATE	MAXIMUM	24.3 L/min	1128 NL/min
	MINIMUM	1 L/min	160 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
MAXIMUM SPEED		20000 min ⁻¹	20000 min ⁻¹
DRY RUN		UNPRESSURIZED ONLY	
RECOMMENDED FILTRATION		ISO 4406 CLASS 17/15/12	

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1			
							MATERIAL:	INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE:			
					DRN. 11.09.02	Schmid	DEUBLIN UNION			
					ENGR. 11.09.02	Dahl				
					APPD.					
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE					
A	UPDATE DWG	027386	04 / 14	RA				NO.	1109-013-195	SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN						