
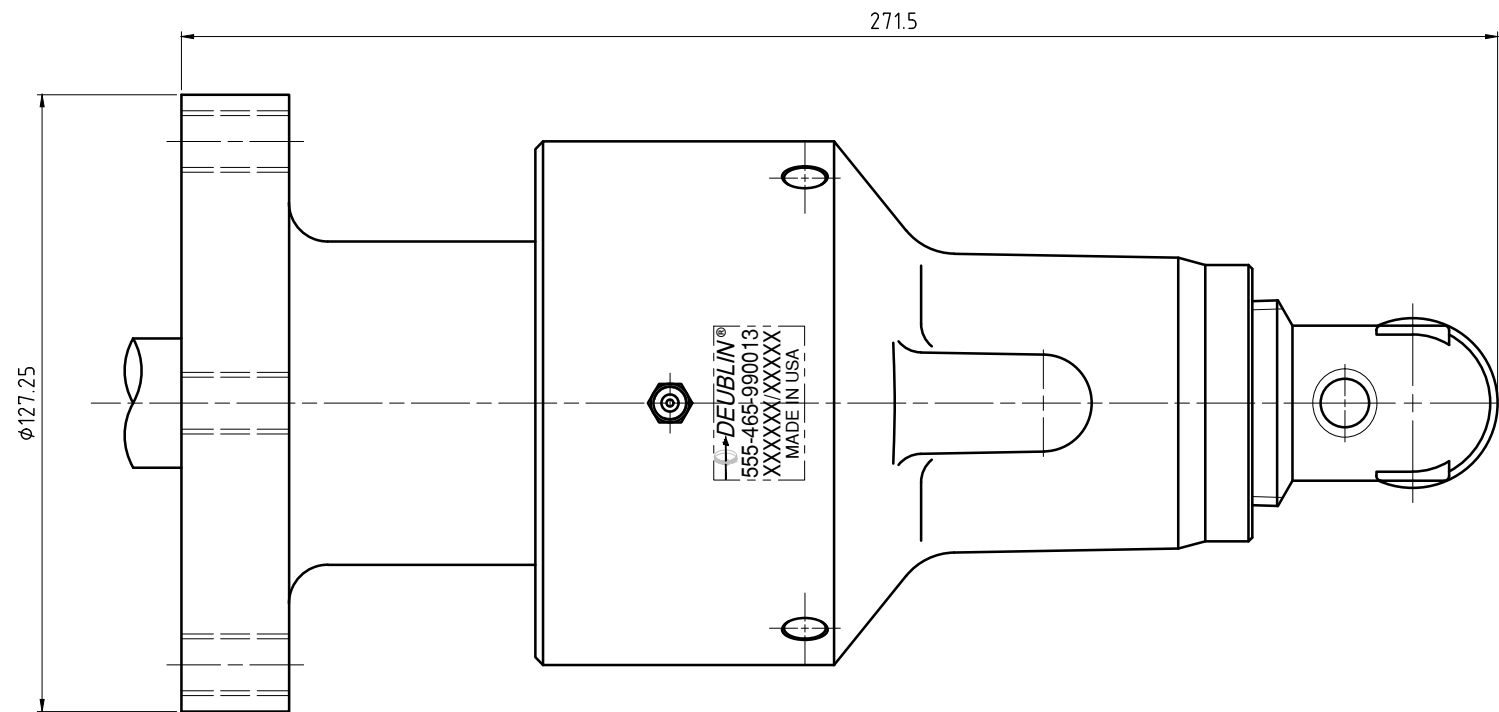
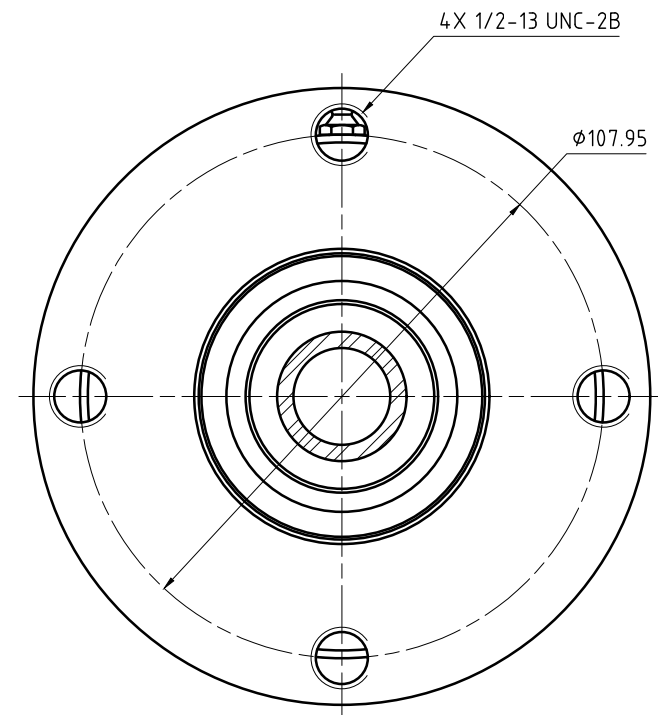


- NOTES:
- 1 - PIPE SUPPLIED BY CUSTOMER.
 - 2 - PIPE LENGTH.
 - 3 - GASKET THICKNESS.

CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

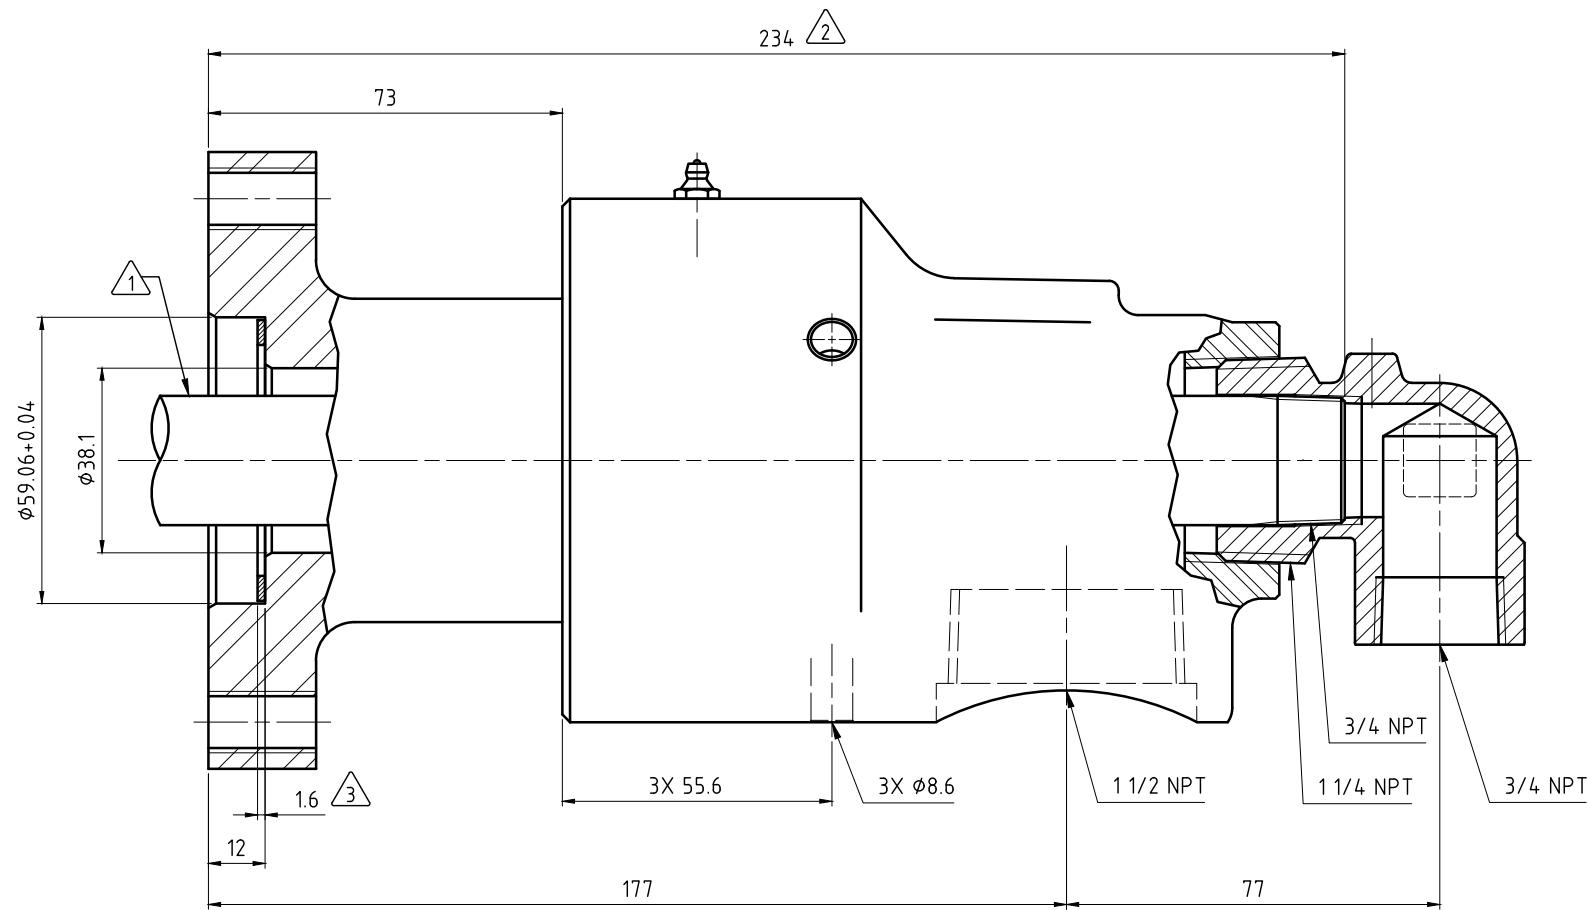

OPERATING DATA			
MEDIA	WATER	SATURATED STEAM (INTERMITTENT)	HOT OIL
PRESSURE MAX.	50 bar	1 bar	6.6 bar
SPEED MAX.	1500 min ⁻¹		
TEMPERATURE MAX.	300 °C		
DRY RUN (WITHOUT ANY MEDIA)	NO		

 DEUBLIN® Engineered for Performance					PROJECTION: 		SCALE: 1:1		MATERIAL: INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE:				
					DRN.	06/10/19	N. Reyna	DEUBLIN UNION			
					ENGR.	06/10/19	T. Wilson				
					APPD.			NO. 555-465-990013			
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						
ISSUE	MODIFICATION	ECO	DATE	SIGN					SHEET A1		