



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

- NOTES:
- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.
 - 2 - USE INSTALLATION INSTRUCTION 040-513.



OPERATING DATA 1					
MEDIA		AIR	HYDRAULIC OIL	VACUUM	WATER
PRESSURE	MAXIMUM	10 bar	204 bar	6.7 kPa	103 bar
	MINIMUM	5 °C	5 °C	5 °C	5 °C
TEMPERATURE		5 °C	5 °C	5 °C	5 °C
SPEED	MAXIMUM	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
	MINIMUM	5 °C	5 °C	5 °C	5 °C

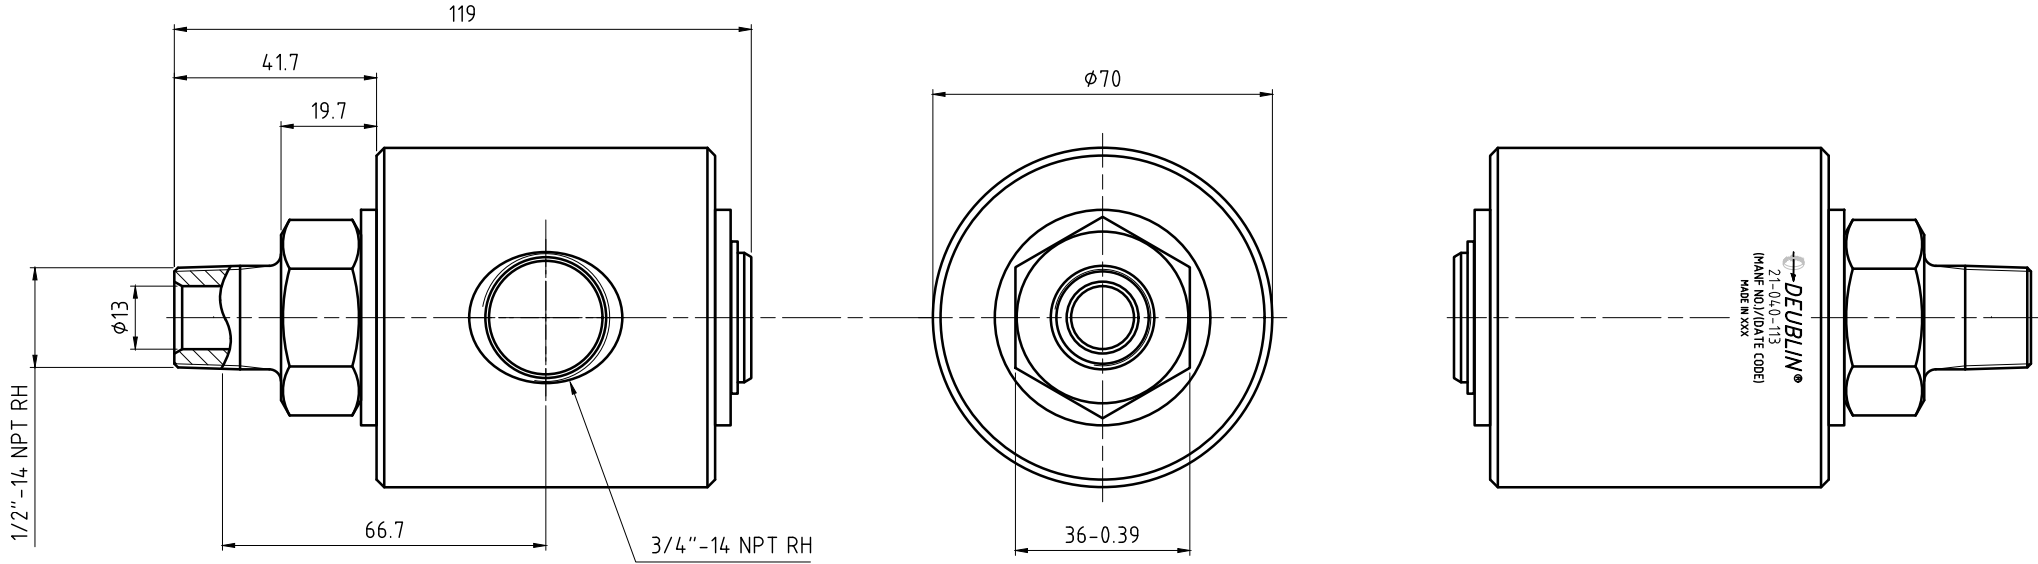

PROJECTION:

SCALE: 1:1

MATERIAL:

DRN.	11/06/2009	galindolm
ENGR.	04/06/2010	eloacker
APPD.		

TITLE: INTERFACE CONTROL DRAWING
UNION, 21, 1/2"-14 NPT RH ROTOR

NO. 21-040-113

SHEET A2

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN