
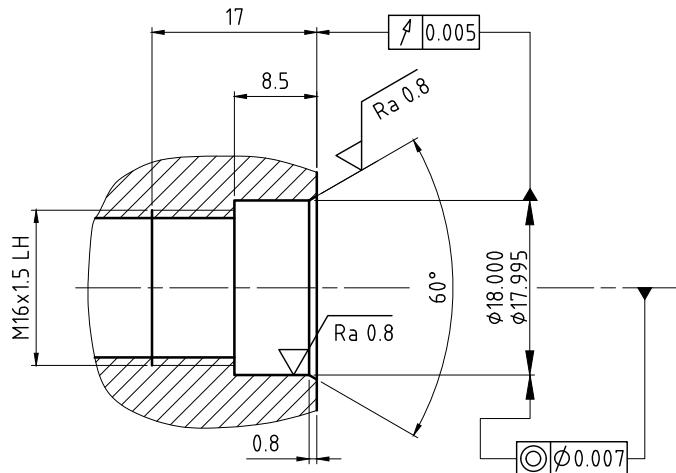


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:


1 - WHEN MOUNTING IN THE HORIZONTAL POSITION A VENT HOLE MUST
BE POSITIONED DOWNWARD (6 O`CLOCK).

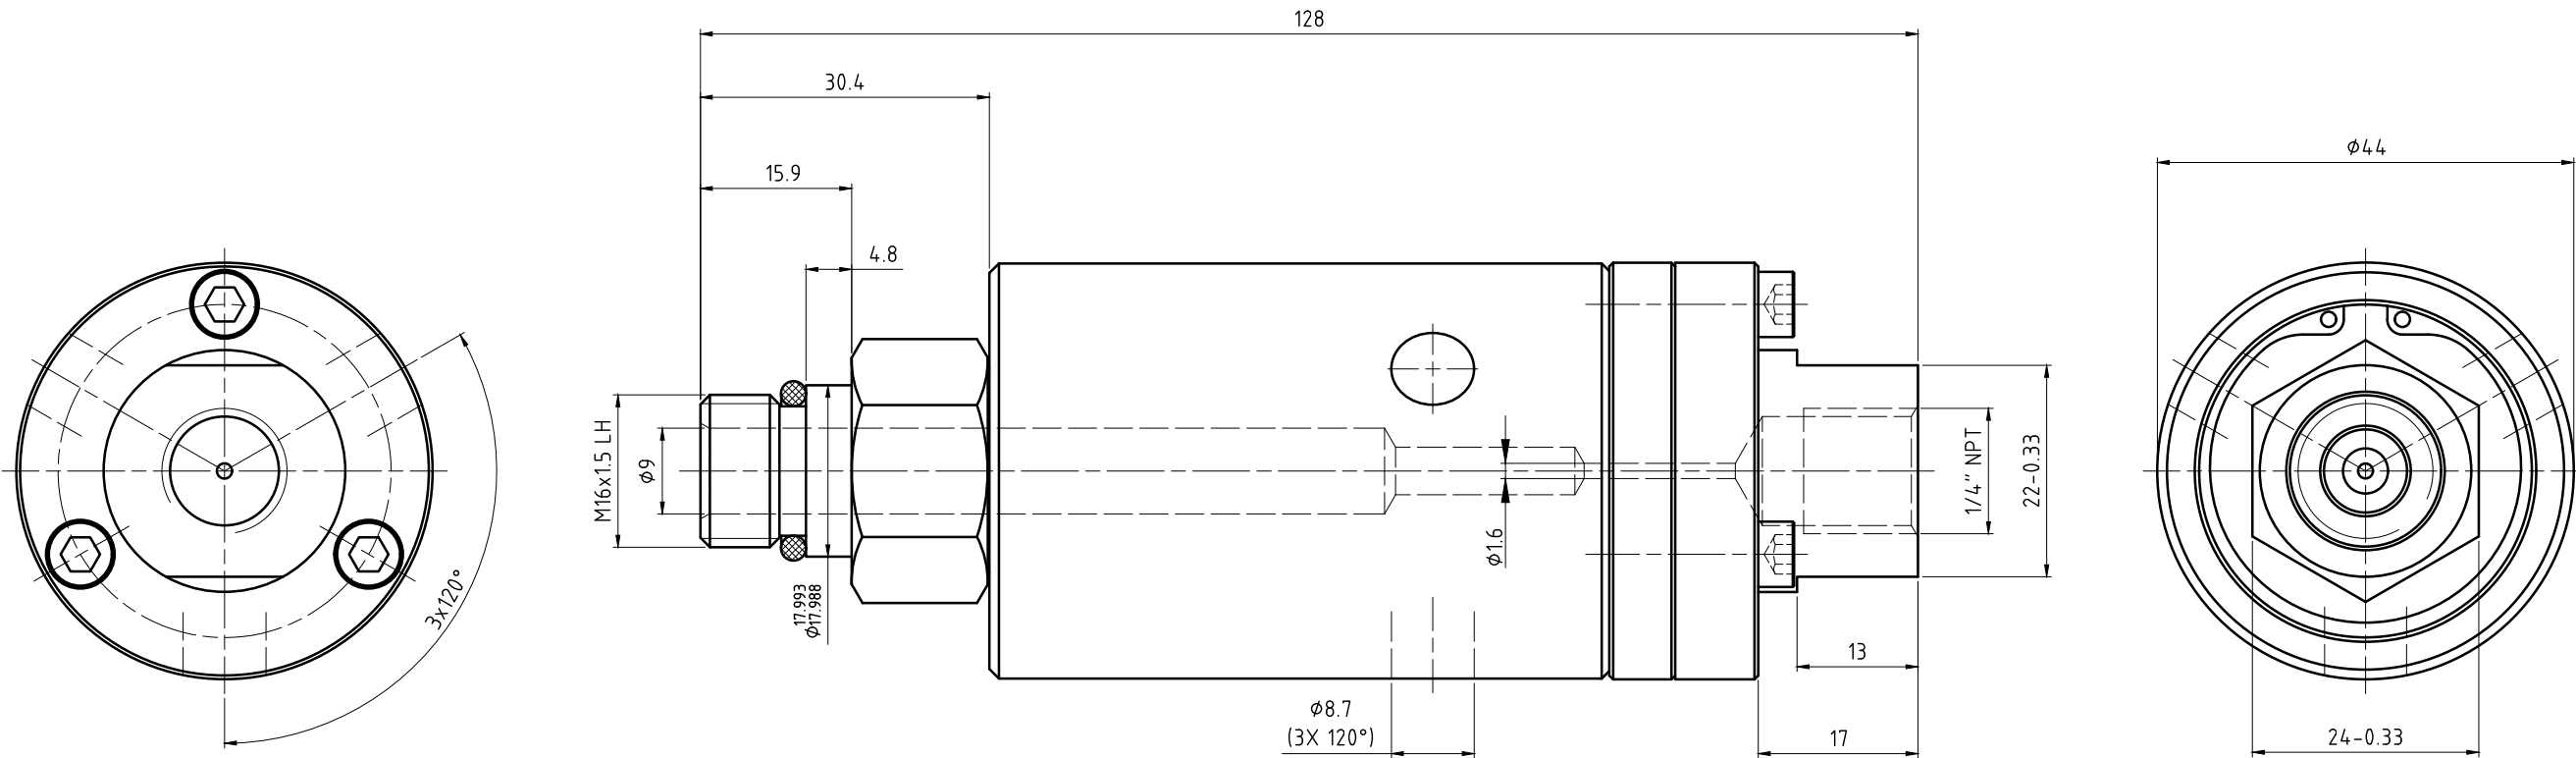

CUSTOMERS SPINDLE END

Operating Data / Betriebsdaten

Media/Medium	cutting oil	Schneidöl
p max.	3000 PSI	210 bar
n max.	20000 RPM	20000 1/min
t max.	160 °F	70 °C
Filtration/Filterung	25 μ m	25 μ m
Dry run/Trockenlauf	max. 5 h	max. 5 h
Q max.	1,06 GPM	4 l/min

 DEUBLIN COMPANY WAUKEGAN, ILLINOIS, U.S.A.					PROJECTION: 		SCALE: 2:1				
							MATERIAL:		INTERFACE CONTROL DRAWING		
					DATE		NAME		TITLE:		
					DRN. 05/08/08		N. Reyna		DEUBLIN UNION		
					ENGR. 05/08/08		T. Wilson				
					APPD.						
									NO.		SHEET A2
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE				1108-093-559		
ISSUE/MODIFICATION					ECO		DATE		SIGN		