CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED SHOULD BE AVOIDED.

2 - USE INSTALLATION INSTRUCTION 040-513.

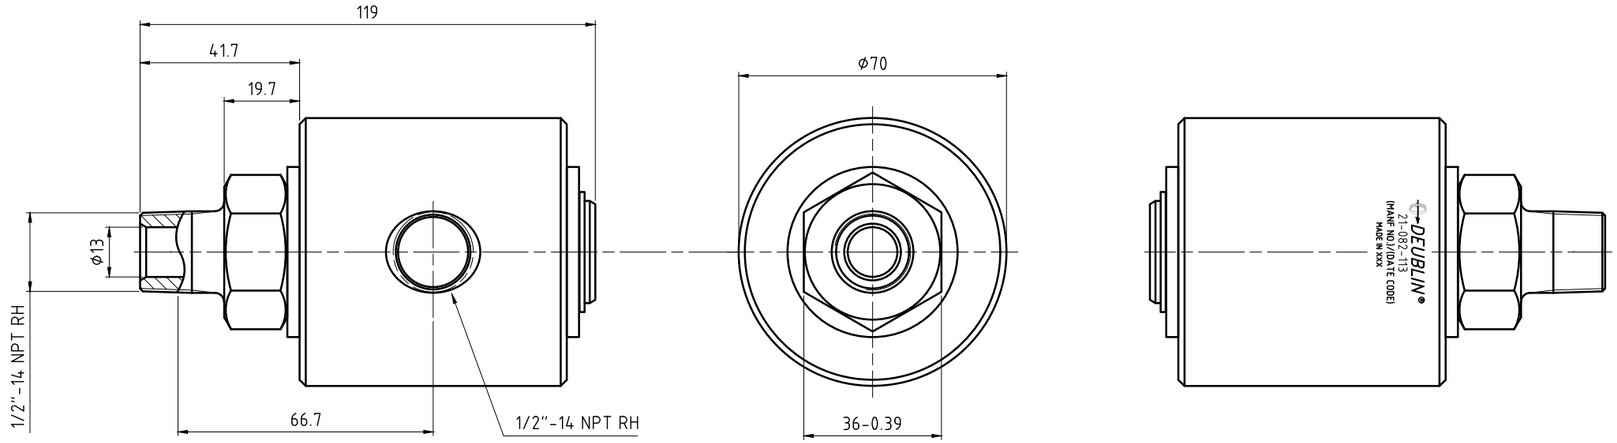

OPERATING DATA 1				
MEDIA		AIR	HYDRAULIC OIL	VACUUM
PRESSURE	MAXIMUM	10 bar	204 bar	6.7 kPa
TEMPERATURE	MAXIMUM	121 °C	121 °C	121 °C
	MINIMUM	5 °C	5 °C	5 °C
SPEED	MAXIMUM	250 min^{-1}	250 min^{-1}	250 min^{-1}

DEUBLIN®
Engineered for Performance

PROJECTION:

SCALE: 1:1

MATERIAL:

	DATE	NAME
DRN.	11/12/2009	galindolm
ENGR.	04/06/2010	eloacker
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

ISSUE	MODIFICATION	ECO	DATE	SIGN

TITLE: INTERFACE CONTROL DRAWING
UNION, 21, 1/2"-14 NPT RH ROTOR

NO. 21-082-113

SHEET A2