CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1. ⚠1 – PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

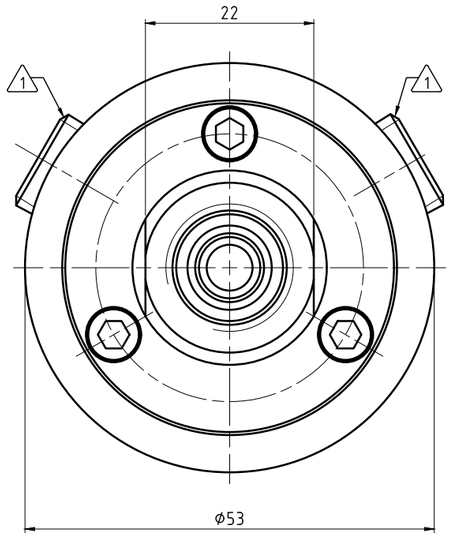

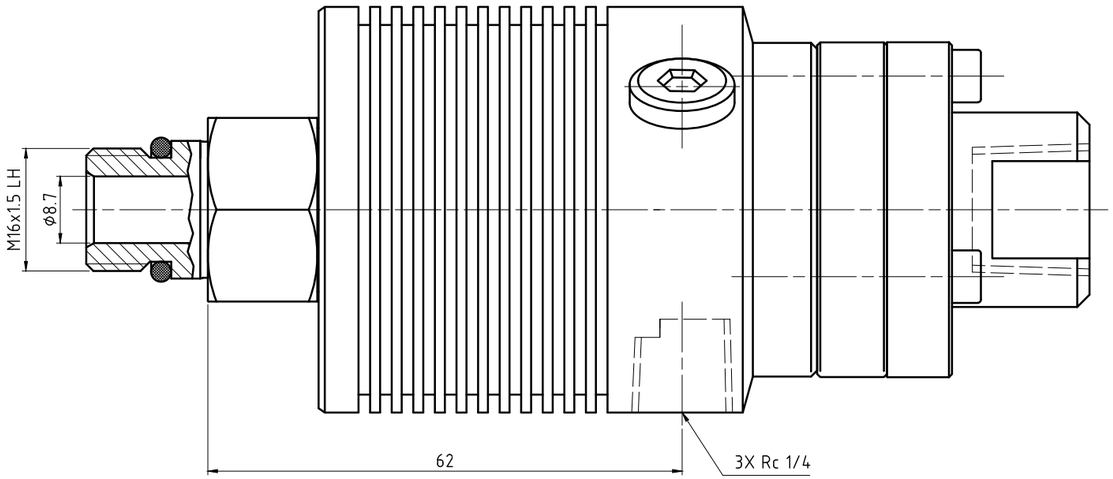

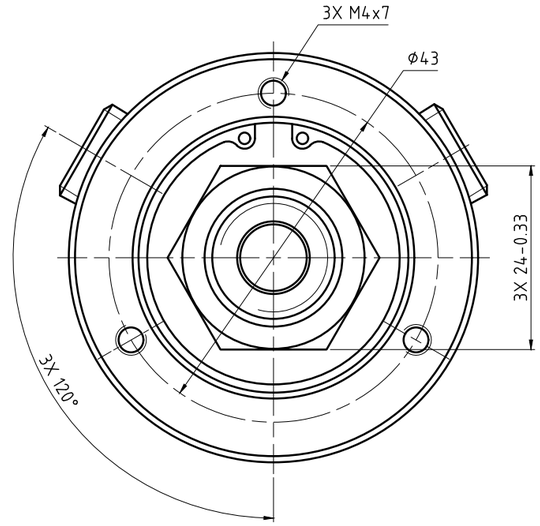

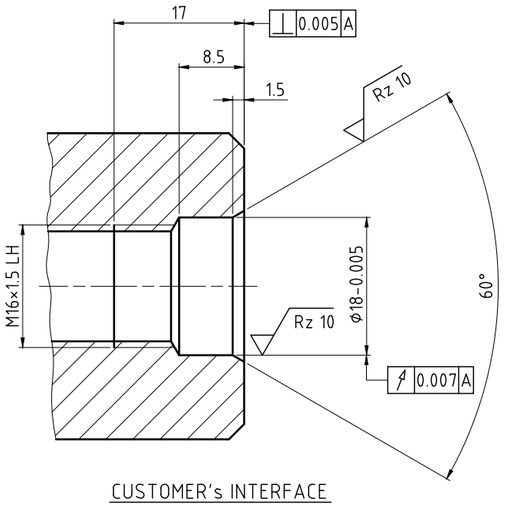

CUSTOMER's INTERFACE

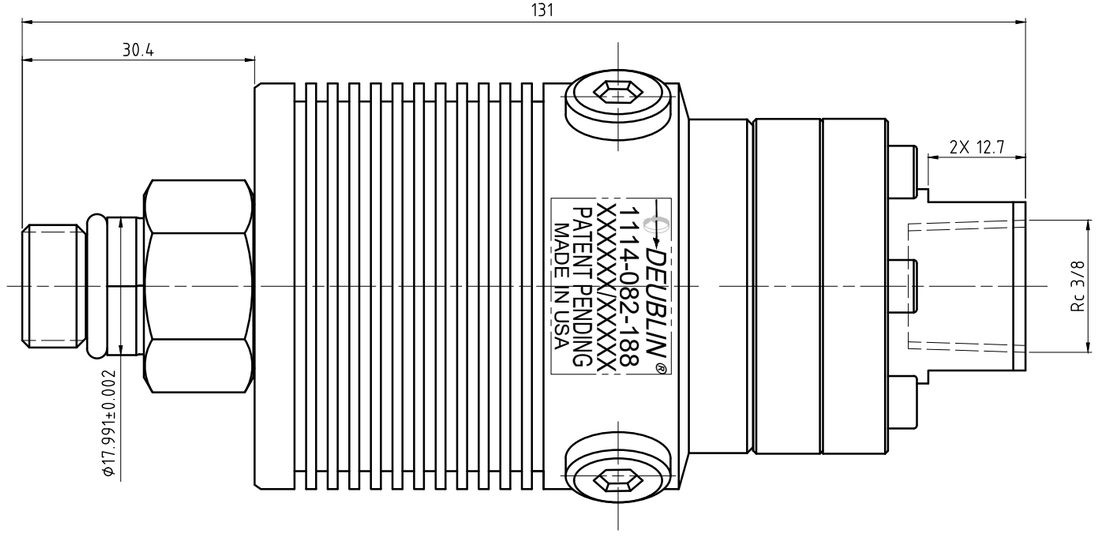

OPERATING DATA		
MEDIA	COOLANT	AIR/MQL
PRESSURE MAX.	105 bar	10 bar
(A) SPEED MAX.	20000 min^{-1}	20000 min^{-1}
TEMPERATURE MAX.	70 °C	70 °C
FLOW RATE MAX.	82 l/min	2550 Nl/min
DRY RUN	UNLIMITED	

DEUBLIN® Engineered for Performance

PROJECTION:

SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN UNION

NO. 1114-082-188

SHEET A2

	DATE	NAME
DRN.	07/26/13	N. Reyna
ENGR.	07/26/13	A. LaCriox
APPD.		

ISSUE	MODIFICATION	ECO	DATE	SIGN
A	WAS 22000 RPM	047095	05/18	CW

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE