
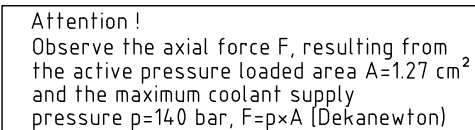
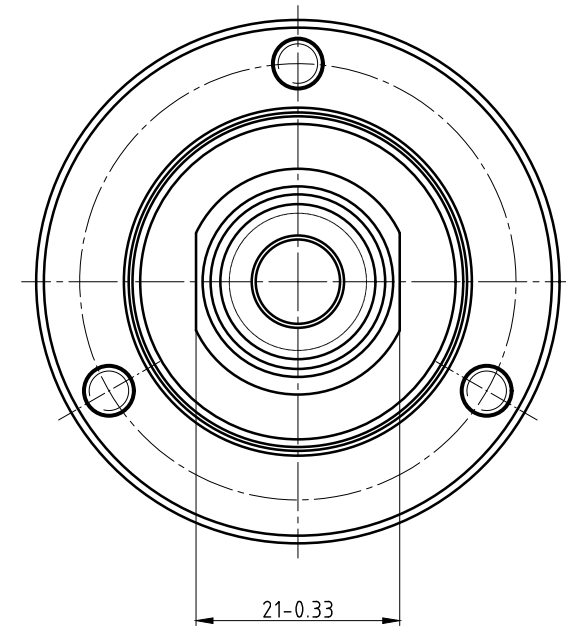


- 1 - USE INSTRUCTION MANUAL 40-558
-  - ROUNDED
-  - 3X HEX. SOCKET HEAD SCREW
DIN 912-M5x20 SUPPLIED BY
THE CUSTOMER
-  - VENT HOLE

Ø18	g4	-0.006	17.994
		-0.011	17.989
Maß	Passung		



OPERATING DATA		
MEDIA	COOLANT	
SPEED MAX./ PRESSURE MAX.	24000 1/min	140 bar
SPEED MAX./ PRESSURE MAX.	40000 1/min	84 bar
TEMPERATURE MAX.	70	°C
FLOW CAPACITY MAX.	28 l/min	
FILTRATION/Filterung	60	µm
RUN WITHOUT MEDIA	possible	

 DEUBLIN GmbH D-65719 HOFHEIM-WALLAU, GERMANY					PROJECTION: 		SCALE: 2:1		A
							MATERIAL:		
					DATE	NAME	TITLE: DEUBLIN BEARINGLESS UNION DEUBLIN Dichtungssatz		
				DRN.	18.04.2008	HJH			
				ENGR.	21.04.2008	CW			
				APPD.					
					NO. 1129-043-345			SHEET A2	
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE									
ISSUE	MODIFICATION	ECO	DATE	SIGN					