
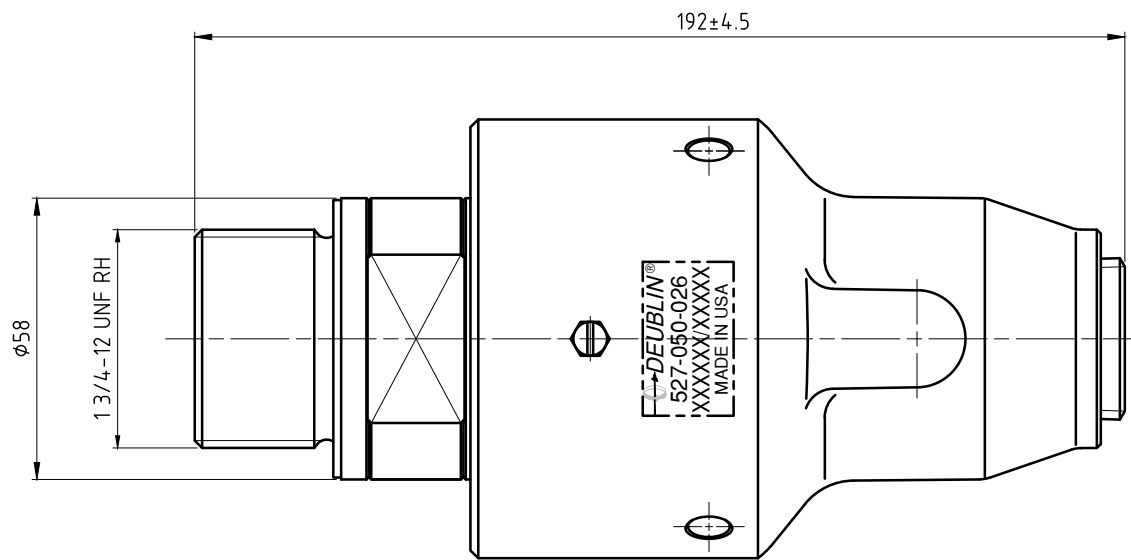
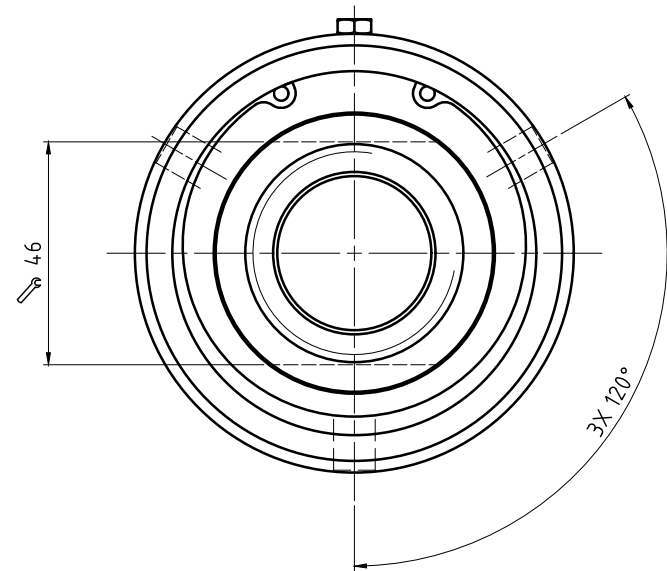
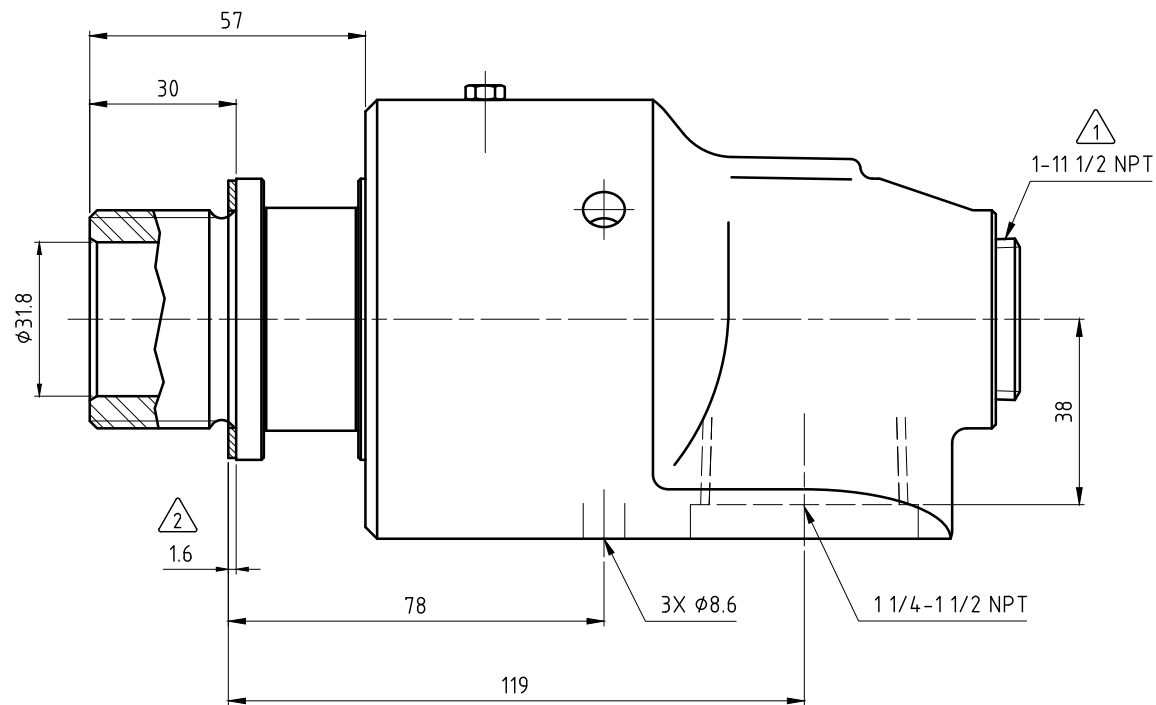


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

- 1 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,
TIGHTEN BEFORE USE.
- 2 - GASKET THICKNESS.

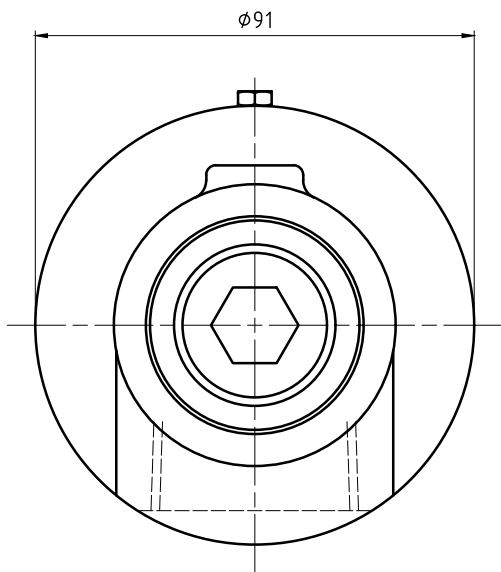

OPERATING DATA / Betriebsdaten

media / Medium	water / Wasser	
p max.	150 PSI	10 bar
t max.	200 °F	90 °C
n max.	2500 RPM	2500 1/min
filtration / Filterung	60 µm	
dry run / Trockenlauf	not possible / nicht möglich	



SCALE: 1:1
MATERIAL: INTERFACE CONTROL DRAWING

DATE	NAME
DRN. 04/07/16	N. Reyna
ENGR. 04/07/16	T. Wilson
APPD.	
UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE	
ISSUE	MODIFICATION
ECO	DATE
SIGN	

TITLE: DEUBLIN ROTATING UNION
DEUBLIN Drehdurchführung

NO. 527-050-026

SHEET
A3