



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

- 1 - OPERATION AT MAXIMUM PRESSURE COMBINED WITH MAXIMUM SPEED
SHOULD BE AVOIDED.
- 2 - USE INSTALLATION INSTRUCTION 040-513.

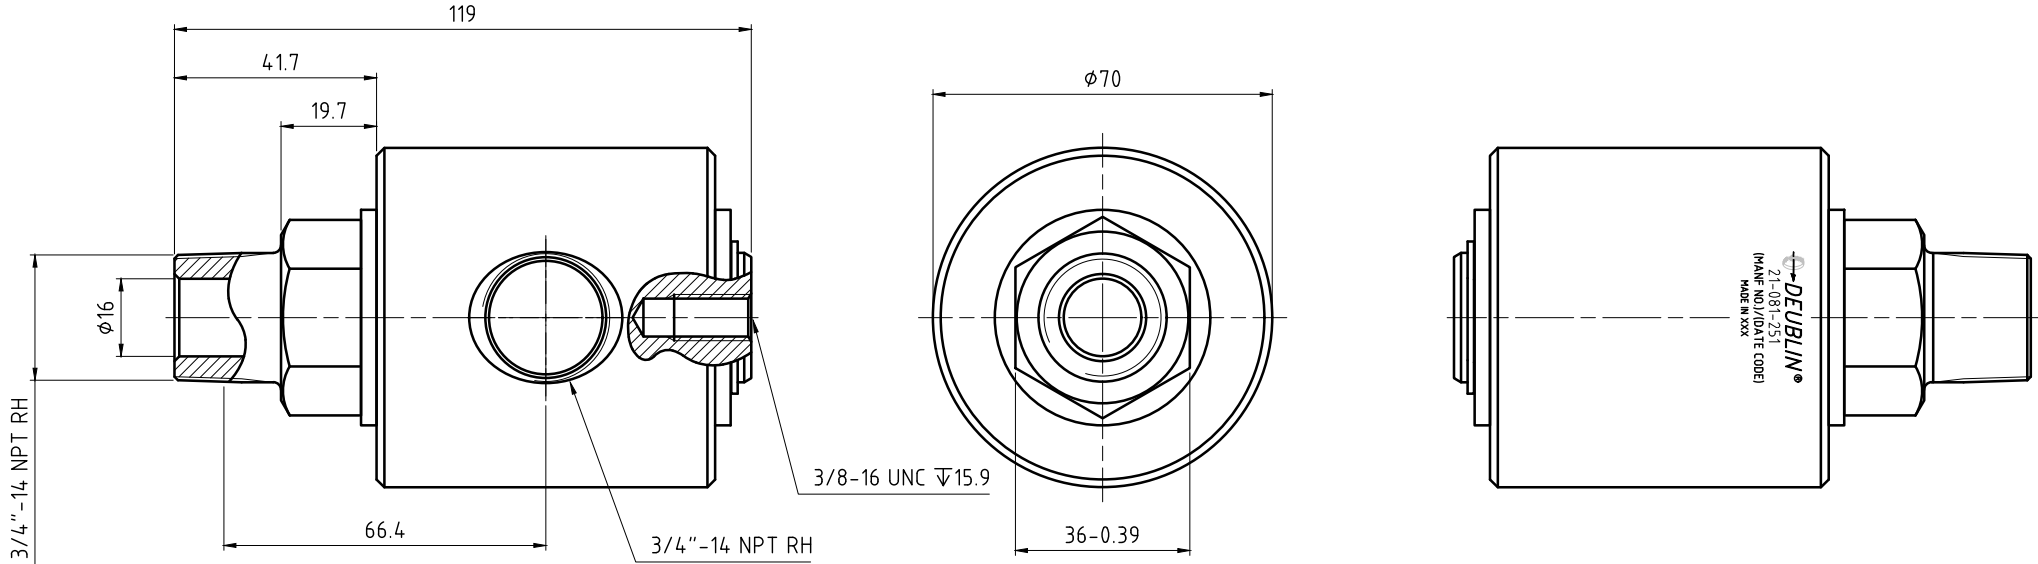

OPERATING DATA 1					
MEDIA		AIR	HYDRAULIC OIL	VACUUM	WATER
PRESSURE	MAXIMUM	10 bar	204 bar	6.7 kPa	103 bar
	MINIMUM	121 °C	121 °C	121 °C	121 °C
TEMPERATURE	MAXIMUM	5 °C	5 °C	5 °C	5 °C
	MINIMUM	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹
SPEED	MAXIMUM	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹	250 min ⁻¹

 DEUBLIN [®] <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 1:1		
							MATERIAL:		
					DATE	NAME	TITLE: INTERFACE CONTROL DRAWING UNION, 21, 3/4" NPT RH ROTOR		
					DRN. 11/12/2009	galindolm			
					ENGR. 04/06/2010	eloacker			
					APPD.				
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE			NO. 21-081-101	SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN					