NOTES:
1 – WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 1115–319.

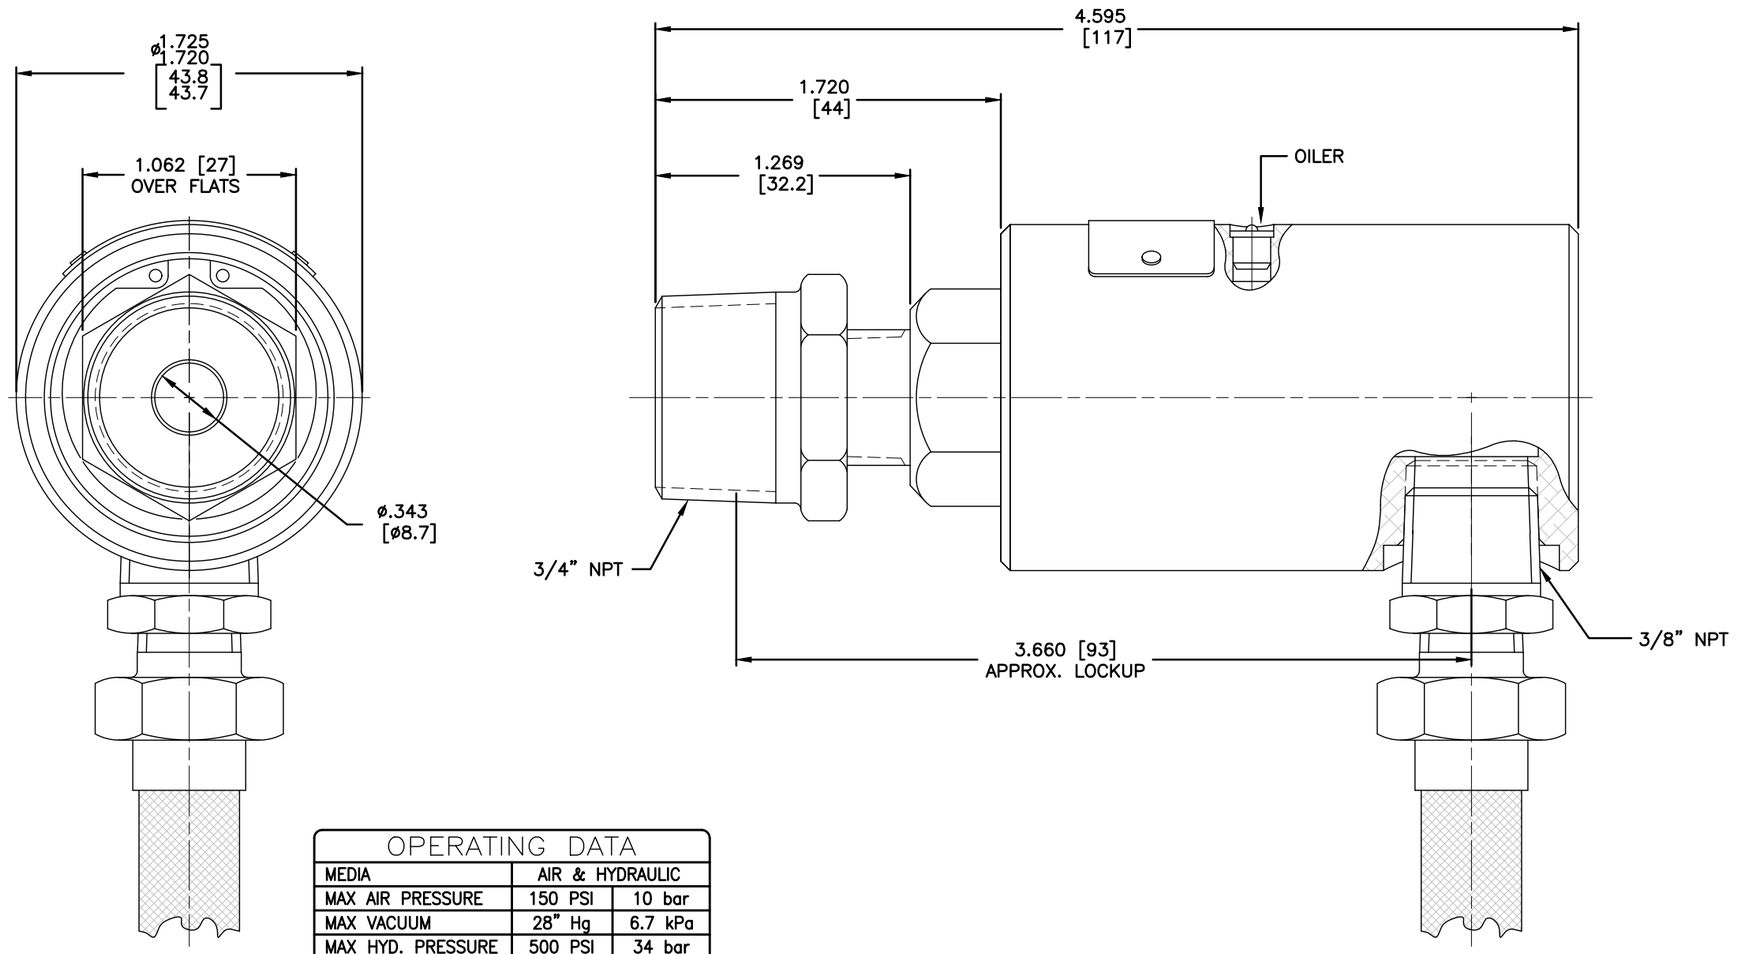

OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX VACUUM	28" Hg	6.7 kPa
MAX HYD. PRESSURE	500 PSI	34 bar
MAX SPEED	1500 RPM	1500/min
MAX TEMPERATURE	250°F	121°C

CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF THE DEUBLIN COMPANY.

LET.	REVISION	ECO	DATE	SIGN

EQUIPMENT REF:

ASSY/TEST FIXTURES REQUIRED:

UNLESS OTHERWISE SPECIFIED TOLERANCES ±.010.
DIMENSIONS IN [ ] ARE IN MILLIMETERS.

SCALE	2:1	DWG SIZE	C
DRN	LG	06/03/03	
ENGR	LG	06/03/03	
APPD			

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

TITLE: INTERFACE CONTROL DRAWING FOR UNION 1115–319

NO. 1115–319–IC
C.A.D DRAWING