


NOTES:

- 1 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 250-979-017.
 2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

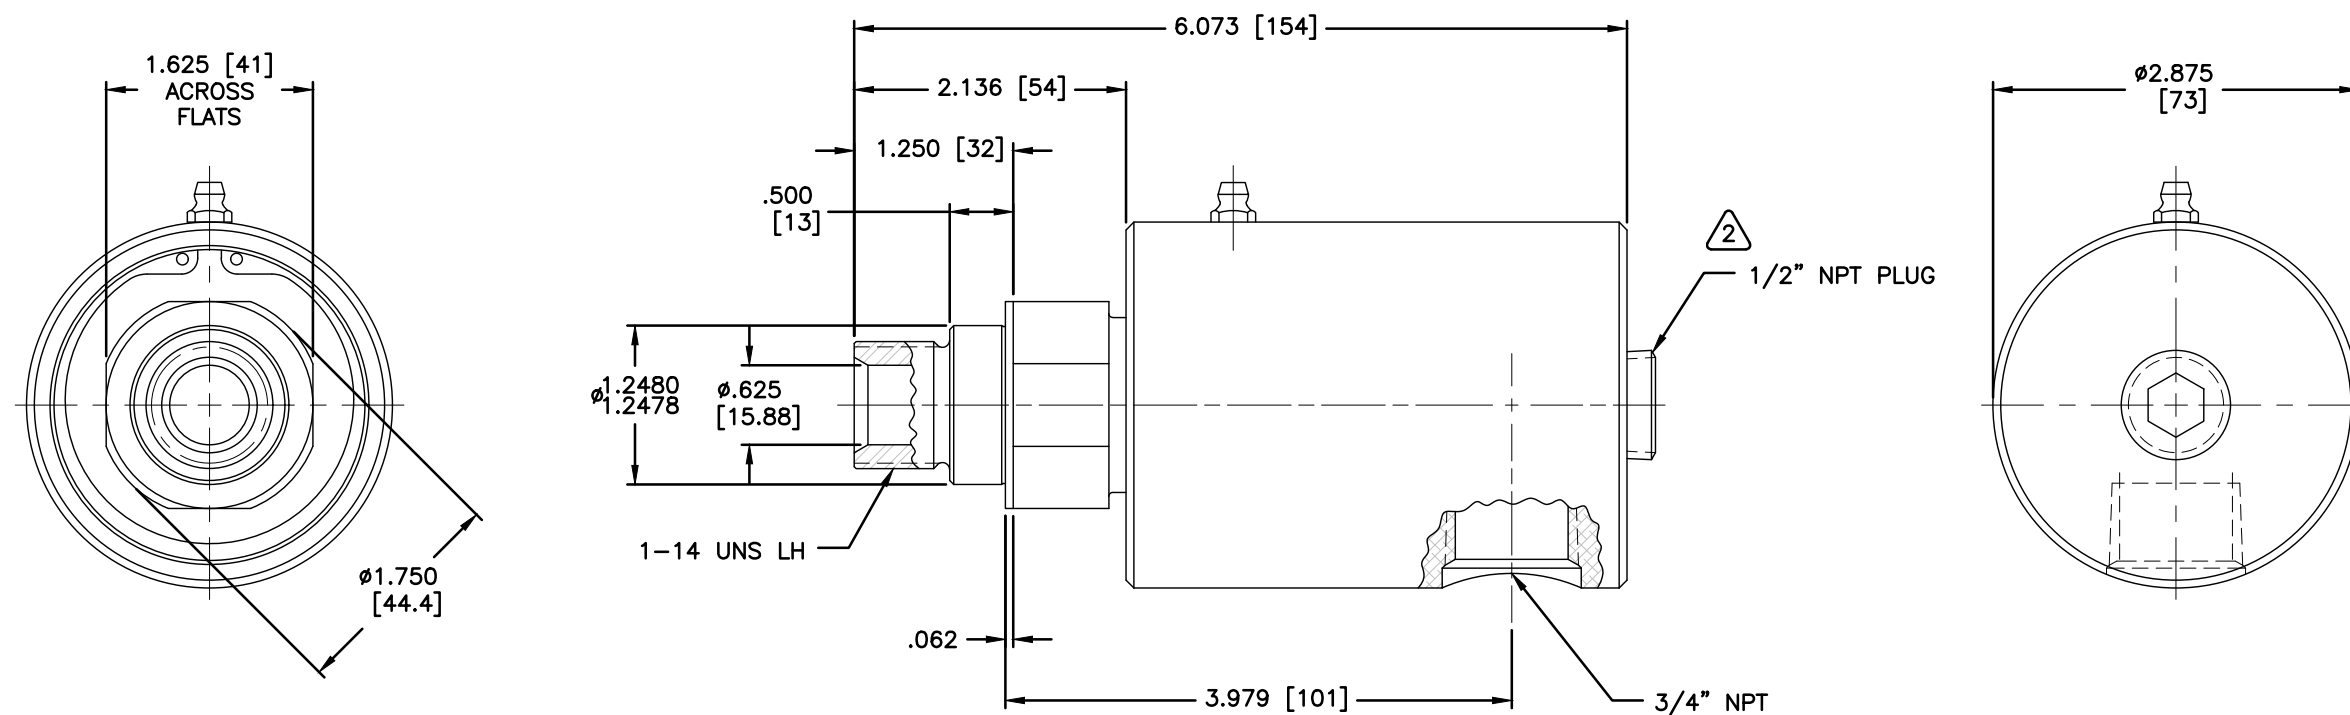

OPERATING DATA		
MEDIA	AIR & HYDRAULIC	
MAX AIR PRESSURE	150 PSI	10 bar
MAX VACUUM	28" Hg	6.7 kPa
MAX HYD. PRESSURE	1000 PSI	70 bar
MAX SPEED	3500 RPM	3500/min
MAX TEMPERATURE	250°F	121°C

CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION
AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED
OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PER-
MISSION OF THE DEUBLIN COMPANY.



DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

2	TITLE:	INTERFACE CONTROL DRAWING FOR UNION 250-979-017
---	--------	---

NO.	C.A.D DRAWING
250-979-017-1C	

LET.	REVISION	ECO	DATE	SIG

EQUIPMENT REF:

	ASSY/TEST FIXTURES REQUIRED:
--	---------------------------------

SCALE	FULL	DWG SIZE	C
DRN	RM	10/08/0	
ENGR	RC	10/08/0	
APPD	ARS	10/08/0	

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ± 0.10 .
DIMENSIONS IN []
ARE IN MILLIMETERS.