



NOTES:

1 - CONTACT DEUBLIN OR VISIT [WWW.DEUBLIN.COM](http://WWW.DEUBLIN.COM)  
FOR INSTRUCTION MANUAL: 040-550

2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED,  
TIGHTEN BEFORE USE.

3 - ACROSS FLATS.

CONFIDENTIAL  
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY  
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,  
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT  
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR  
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

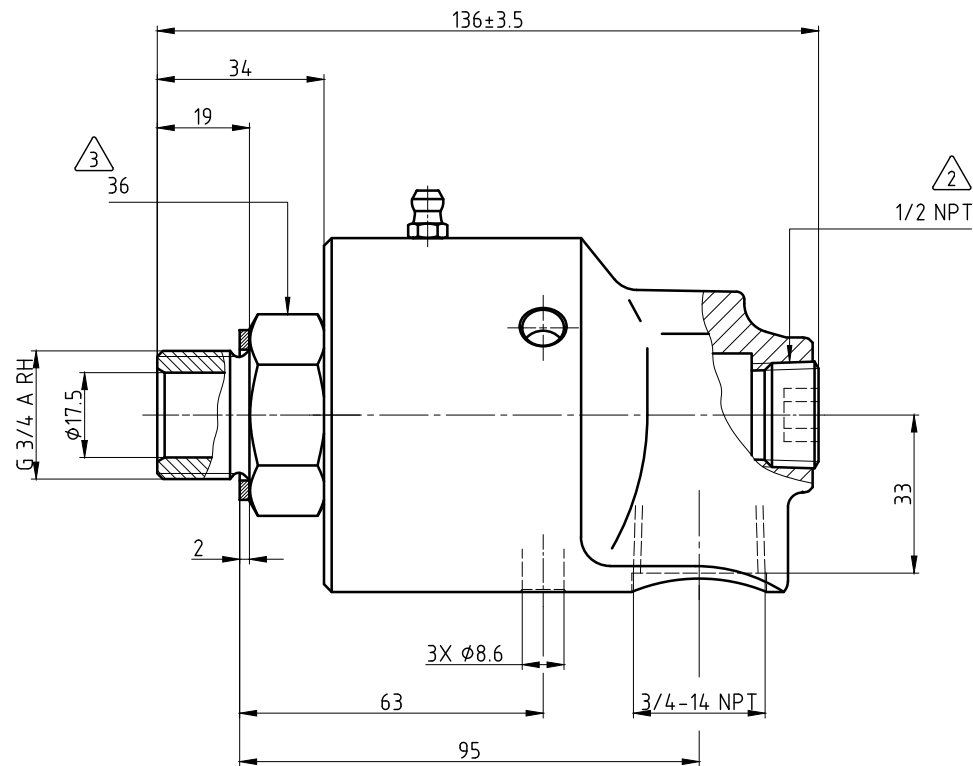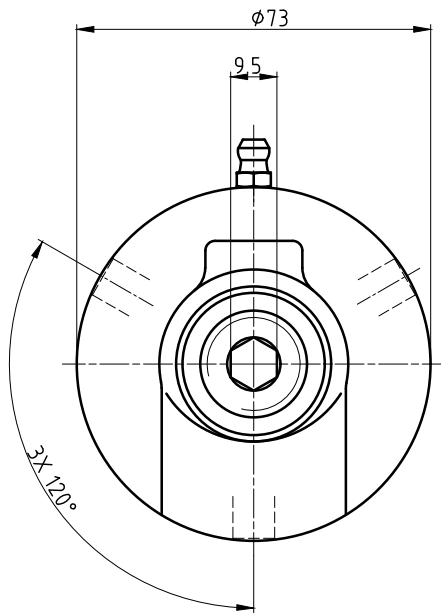

| OPERATING DATA              |                        |
|-----------------------------|------------------------|
| MEDIA                       | WATER                  |
| PRESSURE MAX.               | 10 bar                 |
| SPEED MAX.                  | 3500 min <sup>-1</sup> |
| TEMPERATURE MAX.            | 90 °C                  |
| DRY RUN (WITHOUT ANY MEDIA) | NO                     |



SCALE: 1:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN ROTATING UNION  
DEUBLIN Drehdurchführung

NO. 255-052-445

SHEET  
A2

| DATE             | NAME |
|------------------|------|
| DRN. 10.06.2015  | HS   |
| ENGR. 10.06.2015 | FD   |
| APPD.            |      |

| ISSUE | MODIFICATION | ECO | DATE | SIGN |
|-------|--------------|-----|------|------|
|       |              |     |      |      |

UNLESS SPECIFICALLY TOLERANCED, ALL  
DIMENSIONS ARE CONSIDERED REFERENCE