
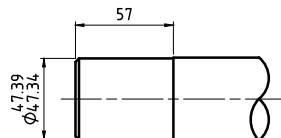

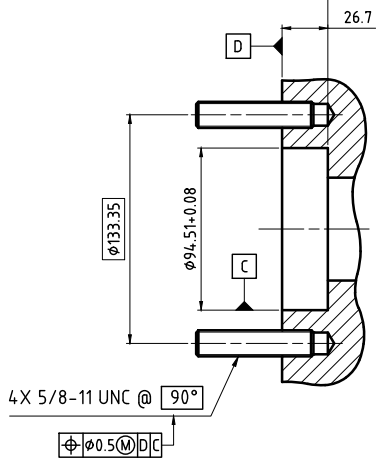
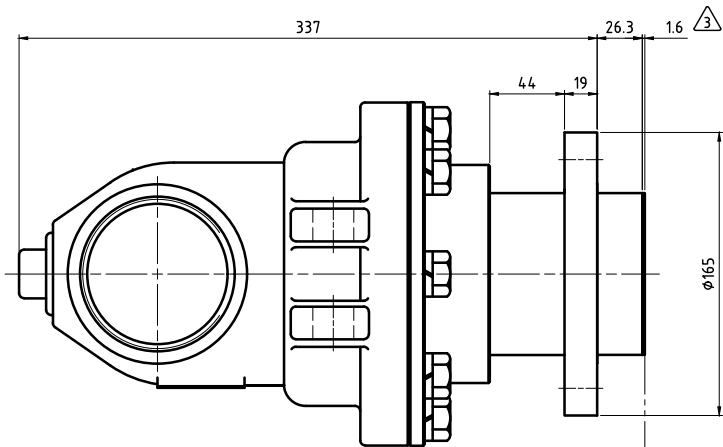
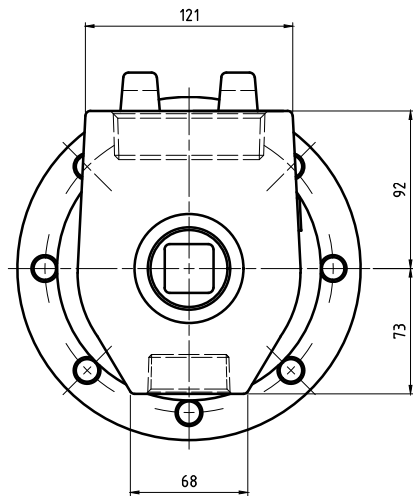
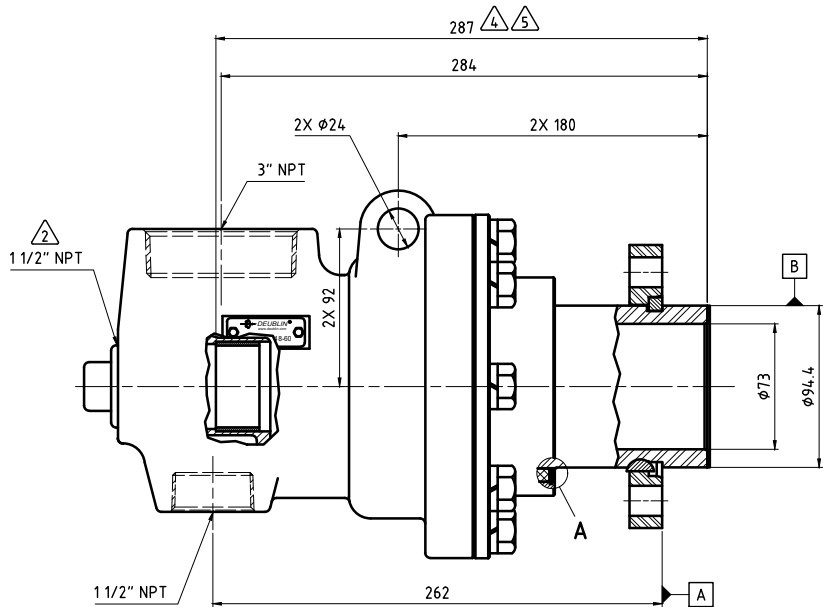


- NOTES:
- 1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.
 - 2 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.
 - 3 - GASKET THICKNESS.
 - 4 - PIPE LENGTH.
 - 5 - PIPE SUPPLIED BY CUSTOMER.

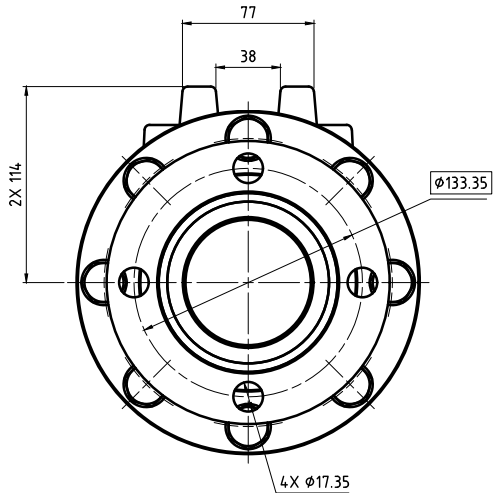

PIPE DETAIL

OPERATING DATA		
MEDIA	THERMAL OIL	
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	350 min ⁻¹
DRY RUN	NO	

		PROJECTION: 		SCALE: 1:2	MATERIAL: INTERFACE CONTROL DRAWING	
		DATE: NAME		TITLE: UNION TYPE C MONOFLOW HOT OIL NPT PORTS 3" CF RTR FLANGE INCLUDED		
		DRN: 02/22/18 N. Reyna				
		ENGR: 02/22/18 T. Wilson				
		APPD:				
		UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE				SHEET A2
ISSUE	MODIFICATION	ECO	DATE	SIGN		