



NOTES:

- (A) 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-561
- (A) 2 - FITTING TO BE ASSEMBLED HAND-TIGHT.
- (A) 3 - TORQUE LUG PROVIDED FOR ANTI-ROTATION. DO NOT RESTRICT MOVEMENT OF UNION.
- (A) 4 - O-RING SIZE: 2-353
SUGGESTED O-RING MATERIAL: FKM
- (A) 5 - PIPE SUPPLIED BY CUSTOMER. PIPE SIZE: 2"
- (A) 6 - PIPE LENGTH.
- (A) 7 - SURFACE FINISH APPLIES WITHIN INDICATED AREA ONLY.

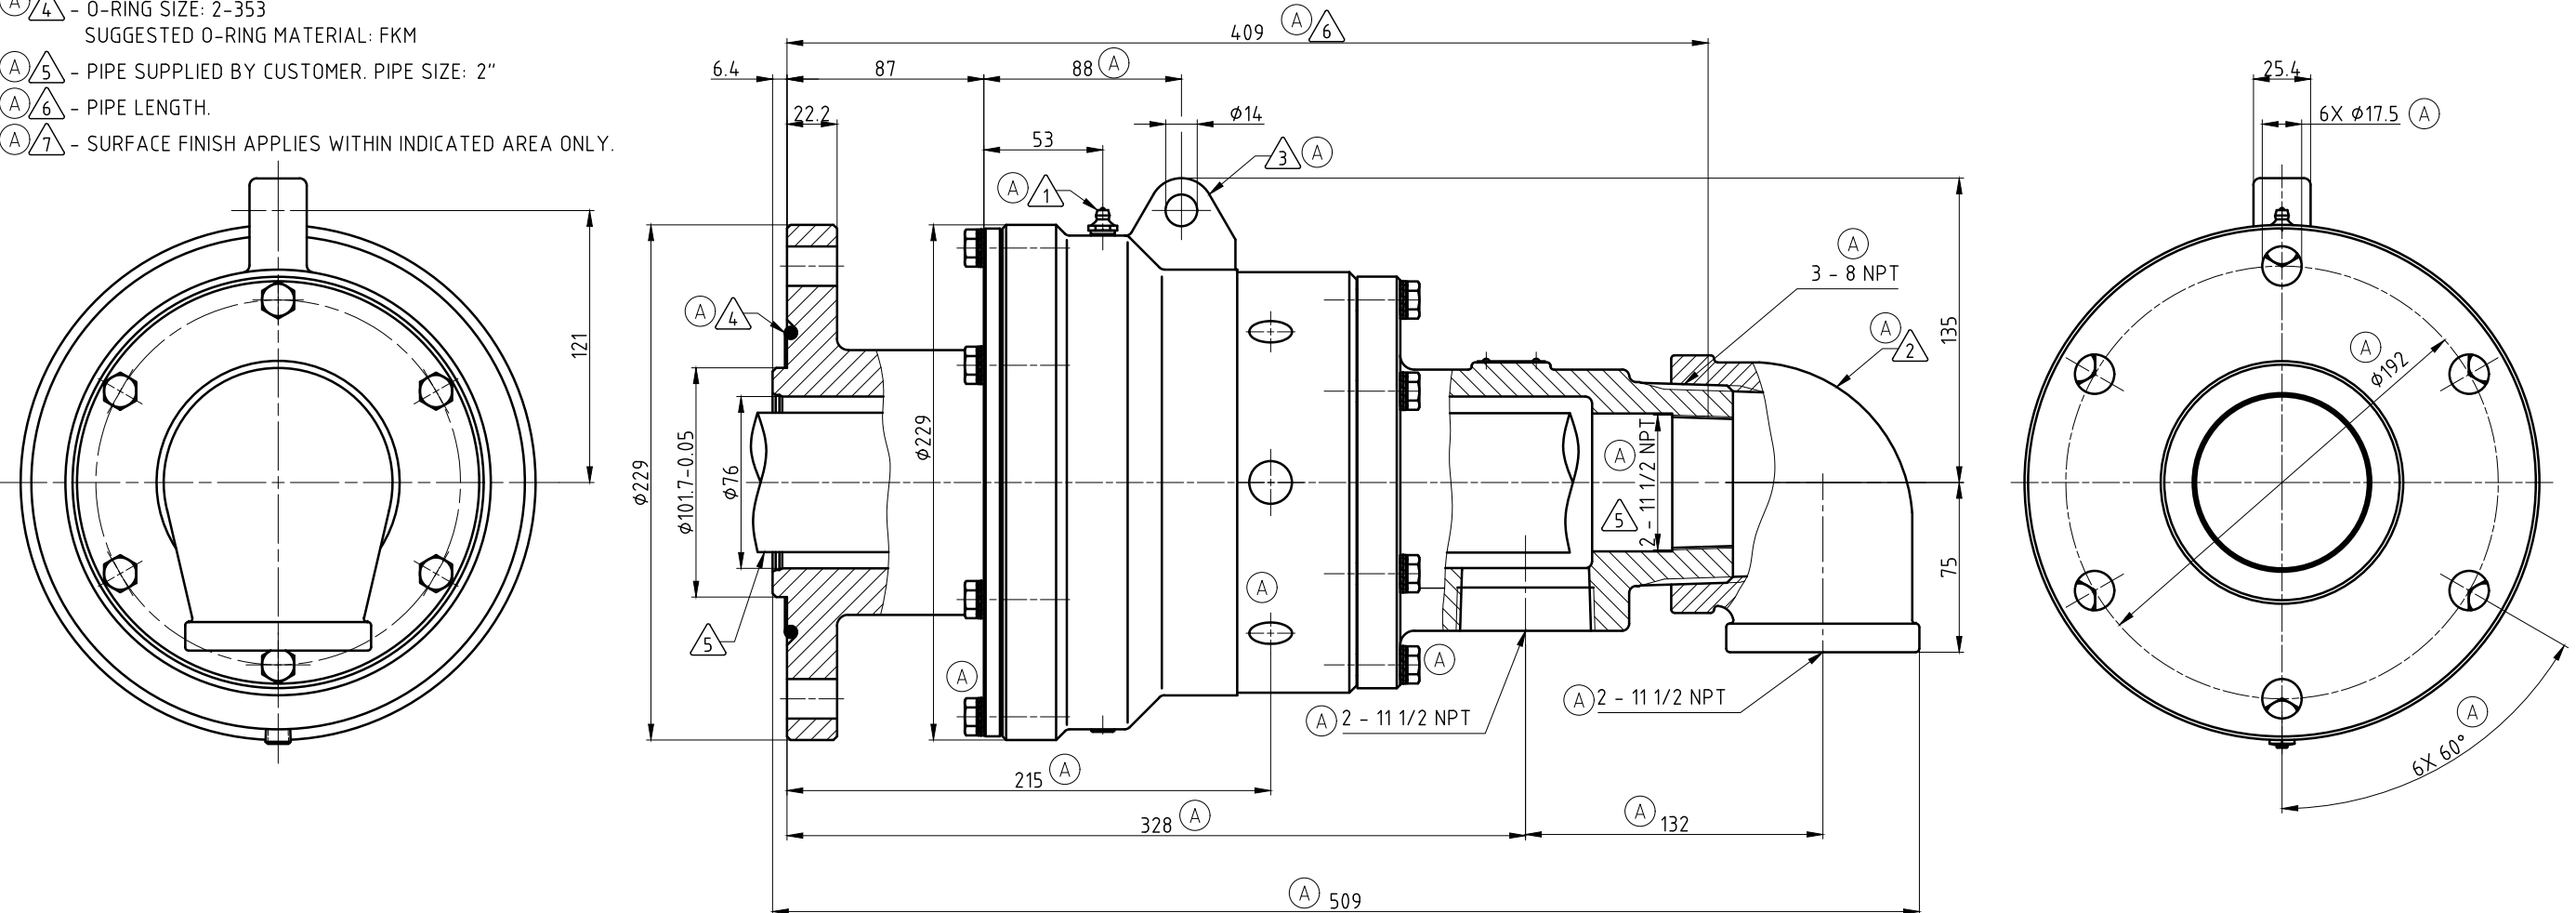

CUSTOMER INTERFACE (A)

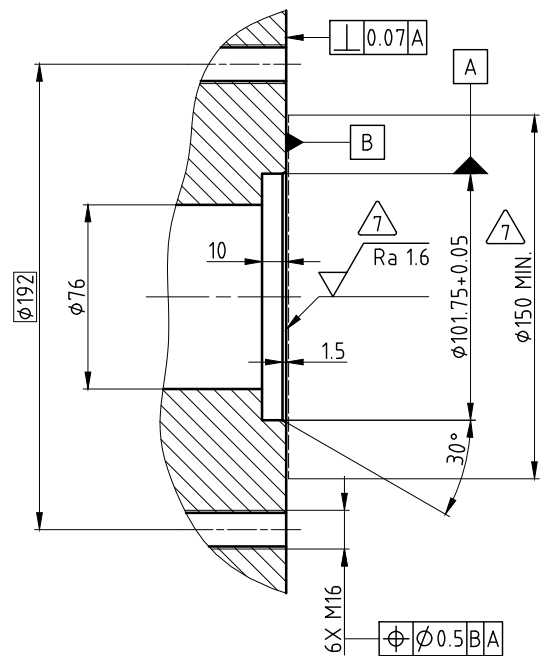

OPERATING DATA	
MEDIA	WATER
PRESSURE MAX.	10 bar
SPEED MAX.	750 min ⁻¹
TEMPERATURE MAX.	121 °C
DRY RUN (WITHOUT ANY MEDIA)	NO
RECOMMENDED FILTRATION	60 micron
FLOW MAX	681 L/min
TORQUE	10.9 Nm

		PROJECTION:	SCALE: 1:2
		MATERIAL:	INTERFACE CONTROL DRAWING
		TITLE:	DEUBLIN UNION
		NO.	6300-006-103
		SHEET	A2
A	SEE CO	62551	07/22
ISSUE	MODIFICATION	ECO	DATE
		MTS	SIGN
		UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE	