
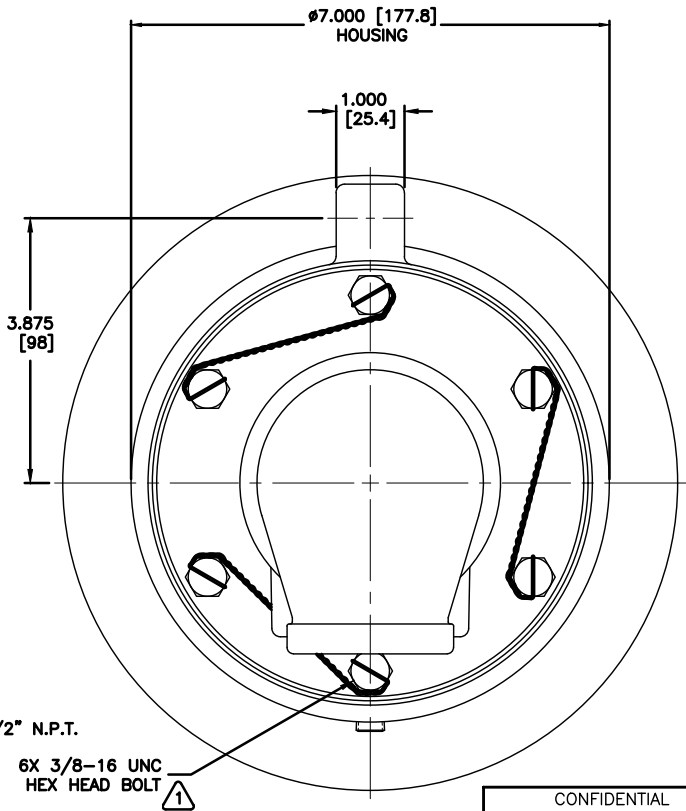
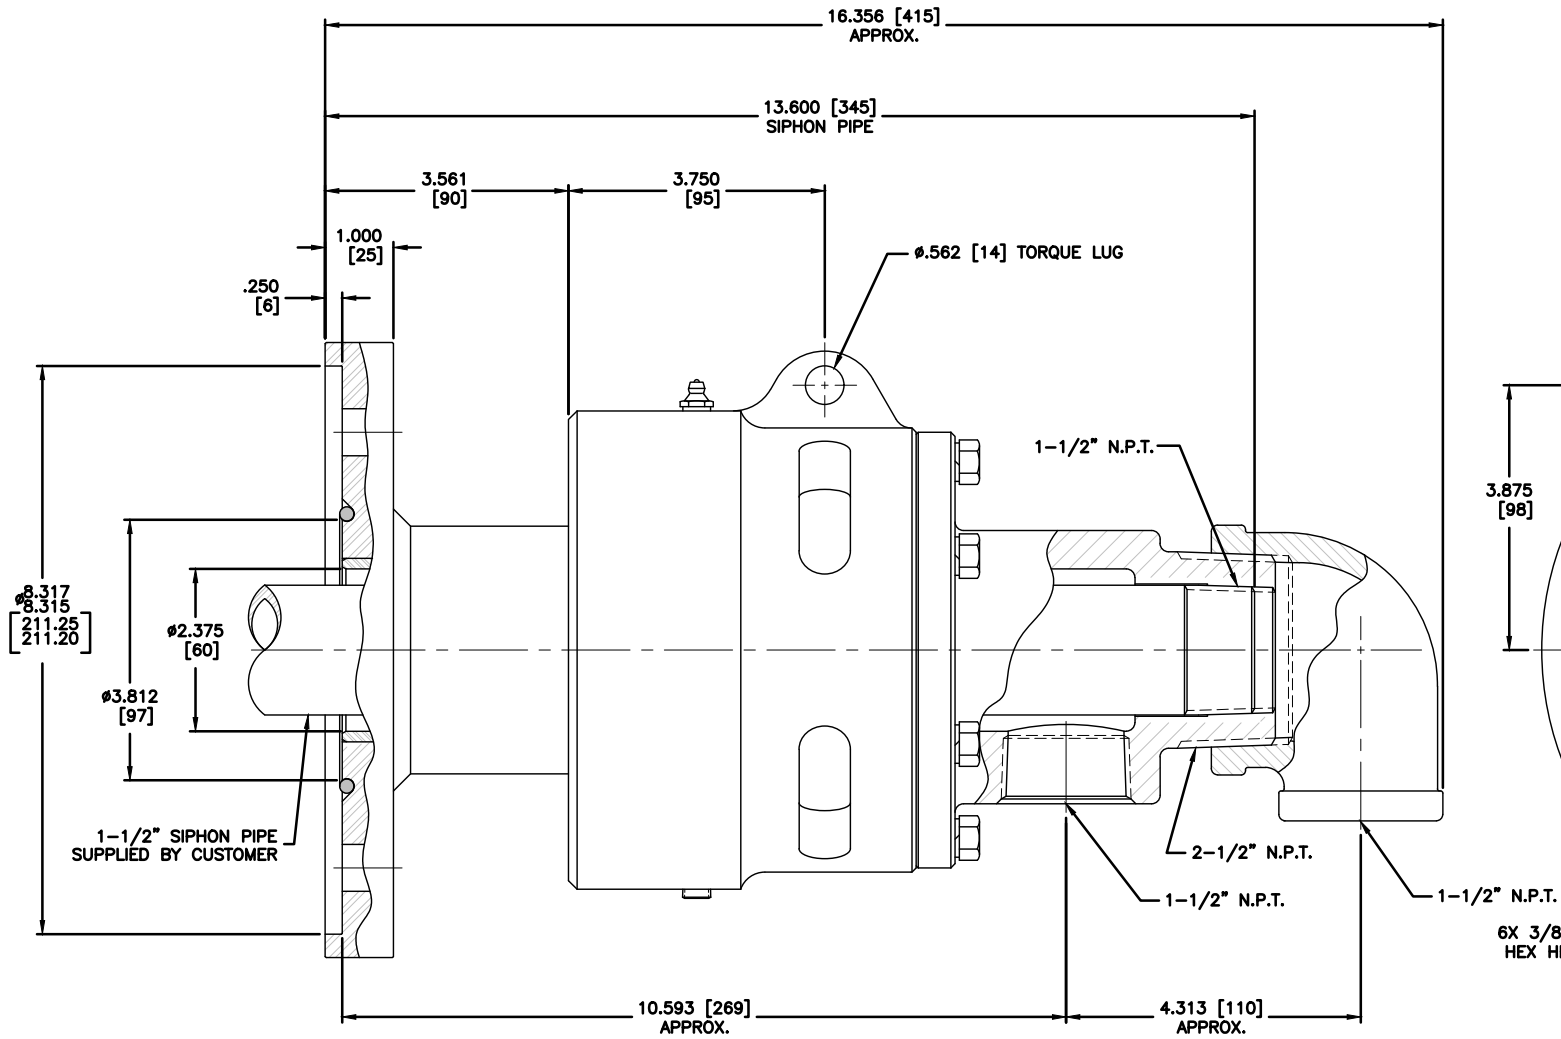
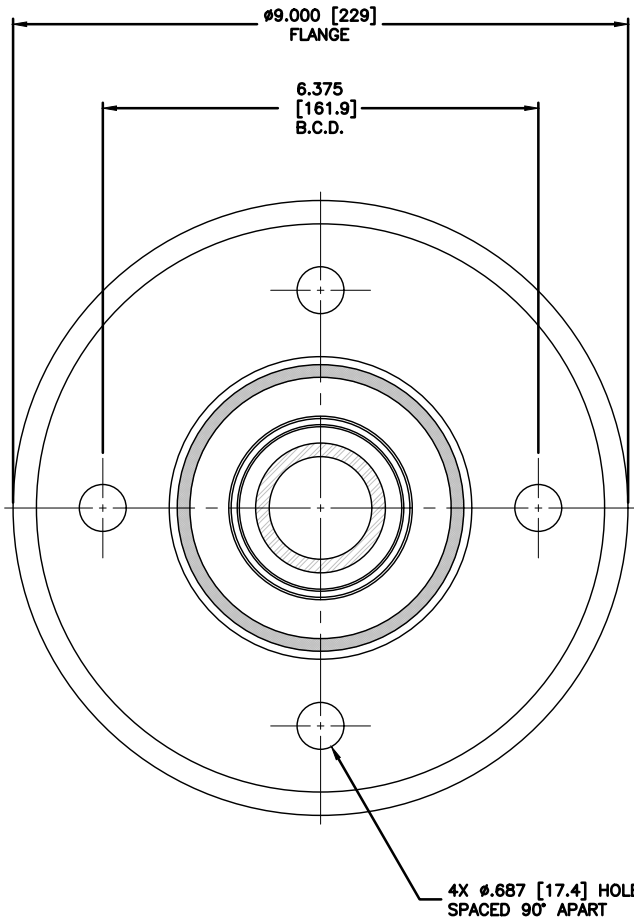


NOTES:
⚠ - TORQUE BOLTS TO 20-30 FT-LBS (27-41 Nm) AND SAFETY WIRE.
2 - WHEN ORDERING FROM DEUBLIN USE PART NUMBER: 6250-006-300.

DWG. NO. 6250-006-300-IC

OPERATING DATA:

WATER SERVICE
150 P.S.I. (10 bar) MAX. PRESSURE
750 R.P.M. (750/MIN) MAX. SPEED
250°F (121°C) MAX. TEMPERATURE
90 G.P.M. (341 L/min) MAX FLOW

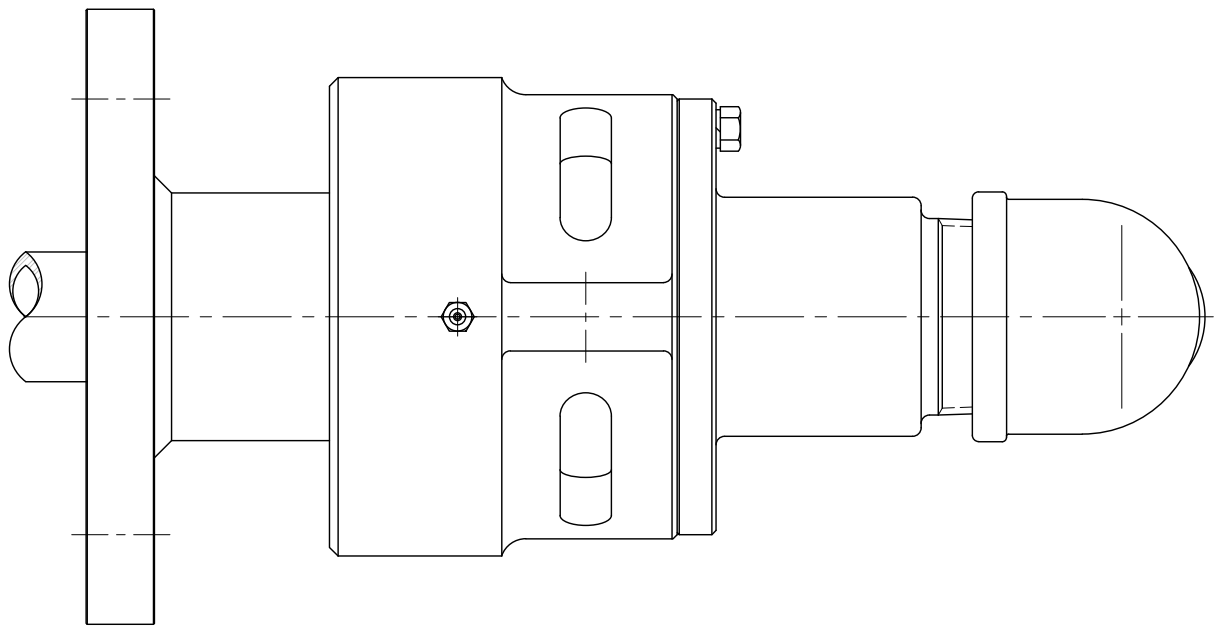

				SCALE	3/4	D
REV	RM	04/28/04		REV	RM	04/28/04
REV	TW	04/28/04		REV	TW	04/28/04
REV	AMS	04/28/04		REV	AMS	04/28/04
				PART NO. 6250-006-300		
				CUSTOMER		
LET.	REVISION	ECO	DATE	SIGN		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE REFERENCE

DIMENSIONS IN [] ARE IN MILLIMETERS.

CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

DEUBLIN COMPANY
WAUKEGAN, ILLINOIS, U.S.A.

WILD INTERFACE CONTROL
DRAWING FOR DEUBLIN
UNION 6250-006-300

DWG. NO. 6250-006-300-IC