CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-553

2 - ROUNDED

3 - SCREW SUPPLIED BY CUSTOMER. SCREW SIZE: DIN912-M5x20

4 - VENT HOLE

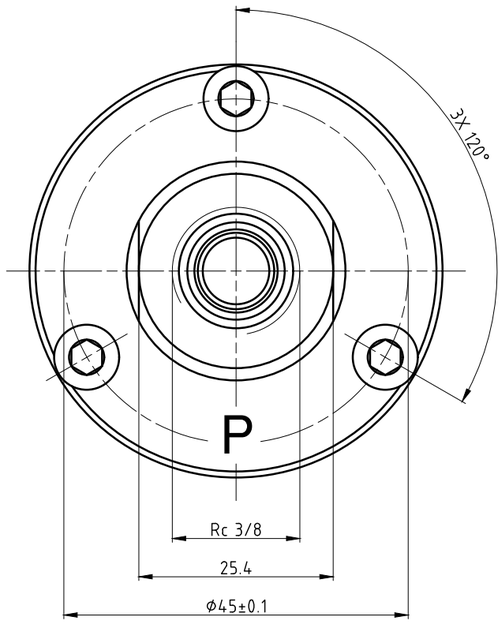

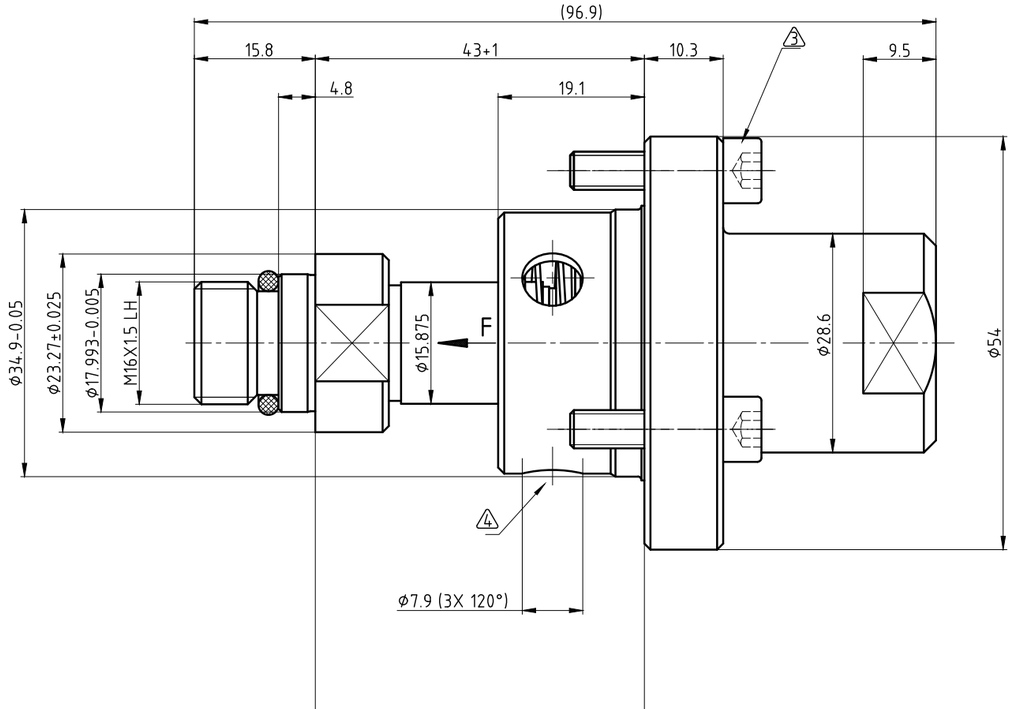

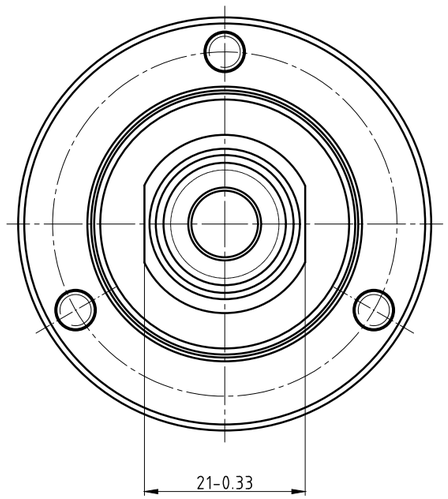

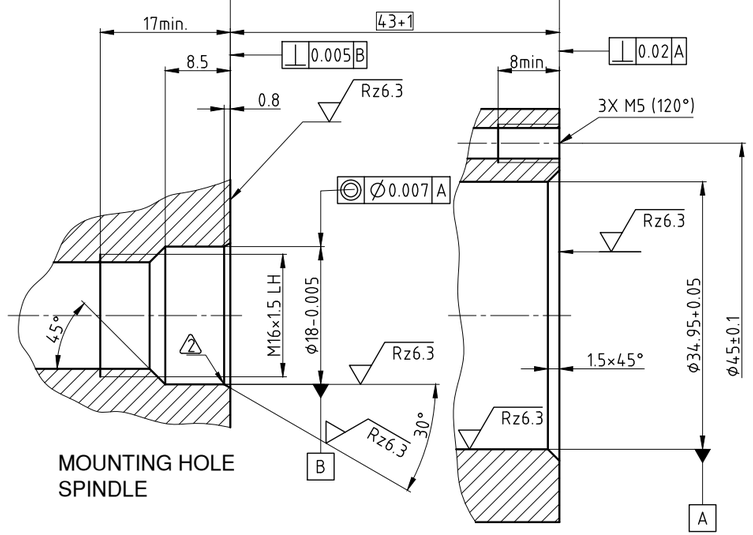

OPERATING DATA			
MEDIA		COOLANT	MQL
PRESSURE	MAXIMUM	140 bar	10 bar
	MINIMUM	-	-
FLOW RATE	MAXIMUM	24.7 L/min	9.9 NL/sec
	MINIMUM	-	-
TEMPERATURE	MAXIMUM	71° C	71° C
	MINIMUM	-	-
DRY RUN		UNLIMITED	UNLIMITED
AXIAL FORCE F		12.7 N/bar	12.7 N/bar
MAXIMUM SPEED		40000 min^{-1}	40000 min^{-1}

DEUBLIN®
Engineered for Performance

PROJECTION:

ISSUE	MODIFICATION	ECO	DATE	SIGN

	DATE	NAME
DRN.	21.03.2012	HS
ENGR.	21.03.2012	CW
APPD.		

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE

SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN BEARINGLESS UNION
DEUBLIN Dichtungssatz

NO. 1129-036-345

SHEET A2