



CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

NOTES:


- 1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-552
2 - SPINDLE BEARING ARRANGEMENT
3 - DRAIN HOLE
4 - 2X CLAMPING DEVICE & 2X SCREW SUPPLIED BY THE CUSTOMER
5 - FOR POSSIBLE DRY RUN SEE 040-734

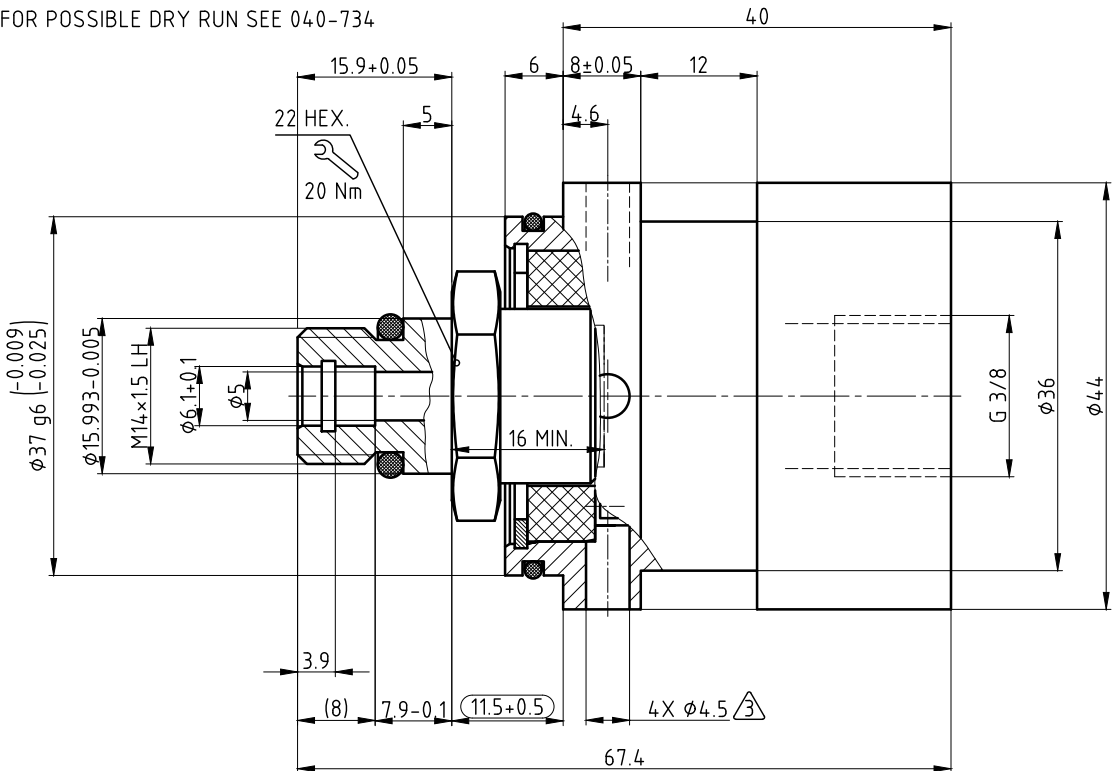

CUSTOMER'S INTERFACE

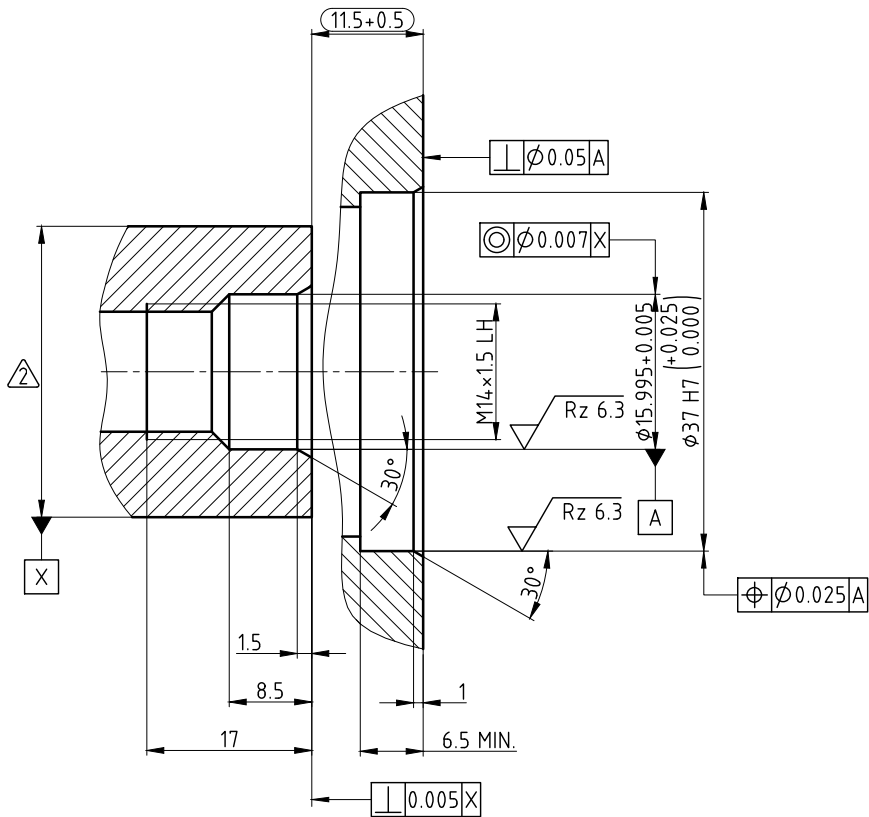

BEARINGLESS UNION, INSTALLED

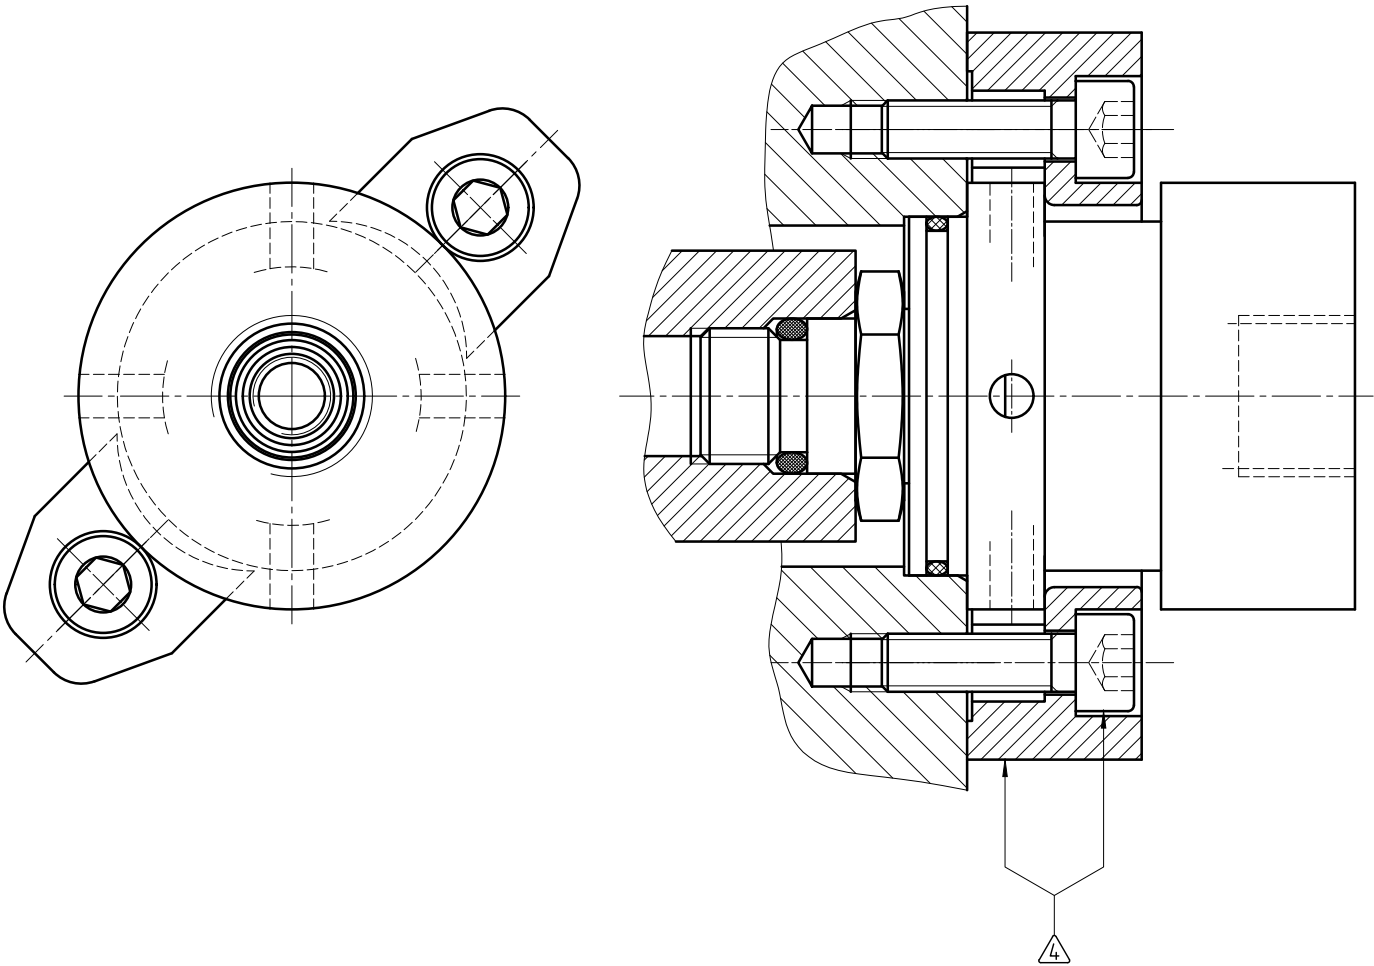

OPERATING DATA

MEDIA		COOLANT	MQL
PRESSURE	MAXIMUM	70 bar	10 bar
	MINIMUM	-- bar	-- bar
MAXIMUM SPEED		20000 min ⁻¹	20000 min ⁻¹
FLOW RATE	MAXIMUM	32.5 l/min	800 Nl/min
	MINIMUM	-- l/min	-- Nl/min
TEMPERATURE	MAXIMUM	71 °C	71 °C
	MINIMUM	5 °C	5 °C
AXIAL FORCE		12.7 N/bar	12.7 N/bar
DRY RUN		SEE 040-734	NO



SCALE: 2:1

MATERIAL: INTERFACE CONTROL DRAWING

TITLE: DEUBLIN BEARINGLESS UNION
DEUBLIN Dichtungssatz

NO. 1117-628-573

SHEET
A2

ISSUE MODIFICATION ECO DATE SIGN

UNLESS SPECIFICALLY TOLERANCED, ALL
DIMENSIONS ARE CONSIDERED REFERENCE