


CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION OF DEUBLIN COMPANY. COPYING, USE,
TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT
TO THE TERMS AND CONDITIONS CONTAINED IN YOUR
AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.


NOTES:

1 - CONTACT DEUBLIN OR VISIT WWW.DEUBLIN.COM
FOR INSTRUCTION MANUAL: 040-502


2 - 2X PIPE PLUG G 1/4

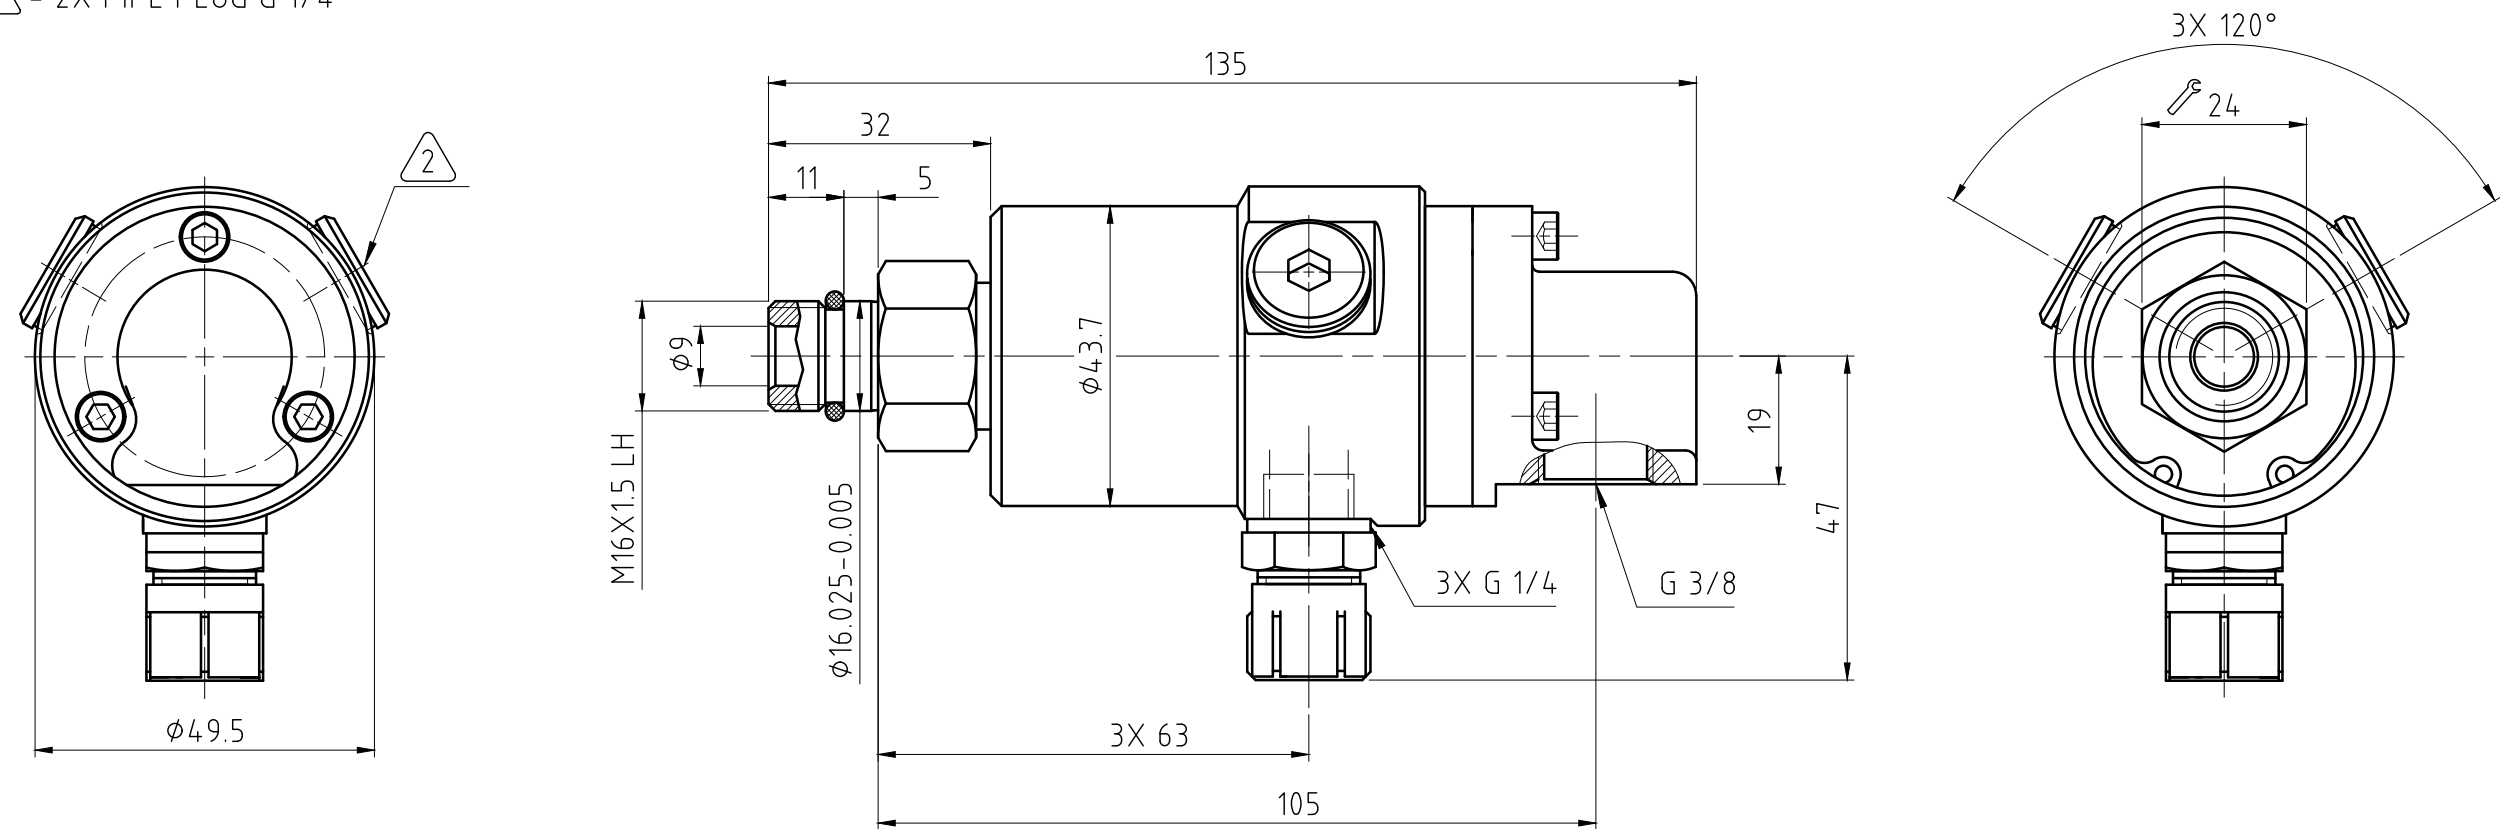

CUSTOMER INTERFACE

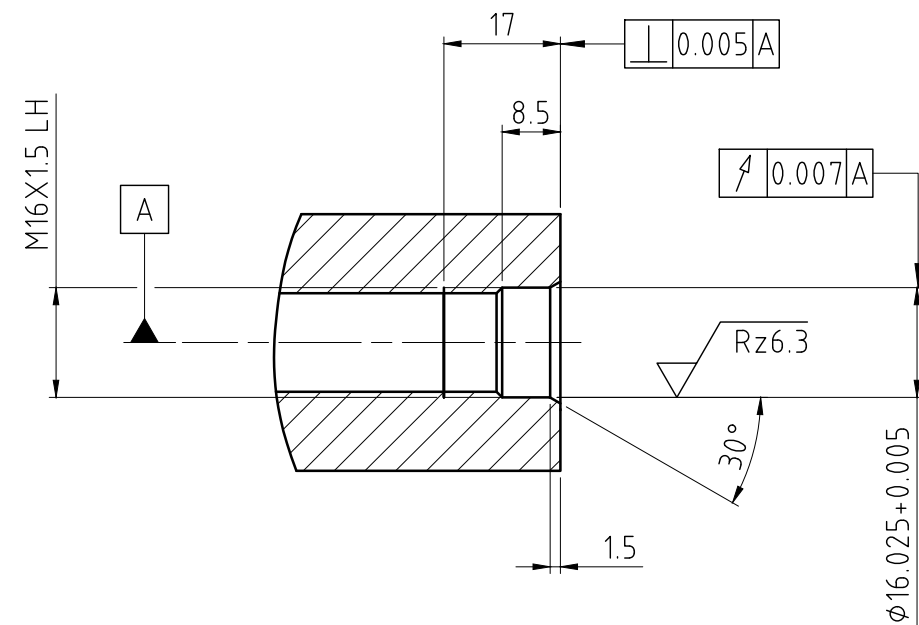

OPERATING DATA			
MEDIA		COOLANT	MQL
PRESSURE	MAXIMUM	70 bar	10 bar
	MINIMUM	0.5 bar	0.5 bar
MAXIMUM SPEED		12000 min ⁻¹	12000 min ⁻¹
FLOW RATE		82 l/min	2550 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	MINIMUM	5 °C	5 °C
DRY RUN		UNPRESSURIZED ONLY	

 DEUBLIN® <i>Engineered for Performance</i>							SCALE: 1:1		MATERIAL: INTERFACE CONTROL DRAWING		
					DATE	NAME	TITLE: DEUBLIN ROTATING UNION DEUBLIN Drehdurchführung				
					DRN.	13.11.2015			MV		
					ENGR.	16.11.2015			CW		
					APPD.			NO. 902-120-192		SHEET A3	
					UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCE						
ISSUE	MODIFICATION	ECO	DATE	SIGN							