

CONFIDENTIAL





THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF DEUBLIN COMPANY. COPYING, USE, TRANSMISSION, DISTRIBUTION, AND DISCLOSURE ARE SUBJECT TO THE TERMS AND CONDITIONS CONTAINED IN YOUR AGREEMENT WITH DEUBLIN COMPANY. ALL RIGHTS RESERVED.

1 - SEAL MUST BE REPLACED WHEN "X" DIMENSION EXCEEDS 6.3 mm. CONTACT DEUBLIN FOR APPROPRIATE SERVICE KIT.


 - PIPE LENGTH.

 - PIPE SUPPLIED BY CUSTOMER.

4 - PLUG INSTALLED HAND TIGHT FROM FACTORY. IF PORT IS NOT UTILIZED, TIGHTEN BEFORE USE.

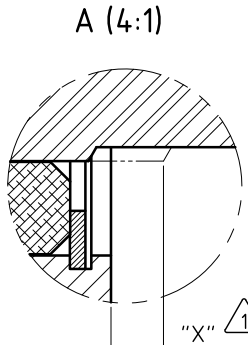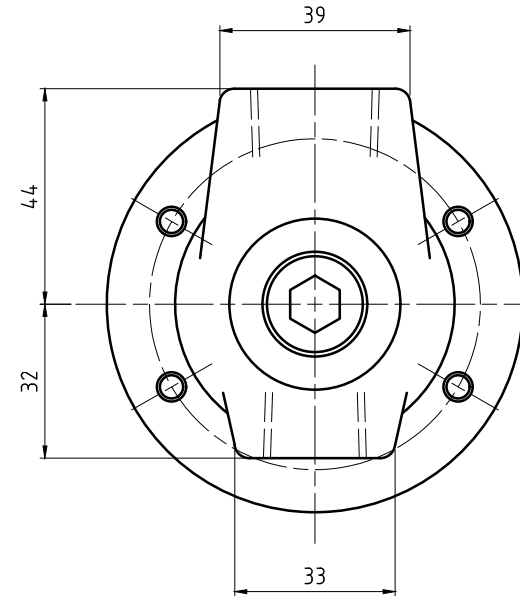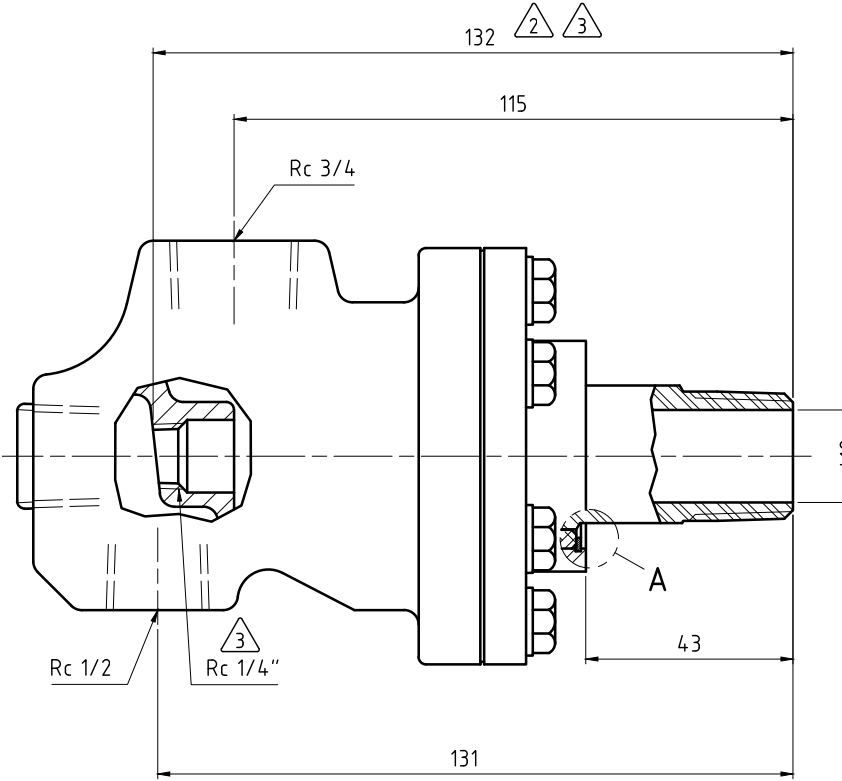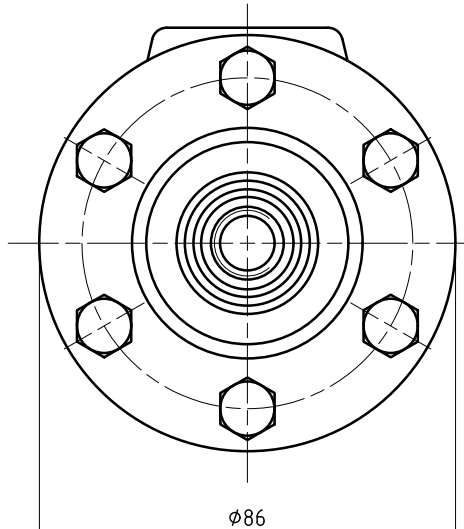

"X" SEAL WEAR DETAIL

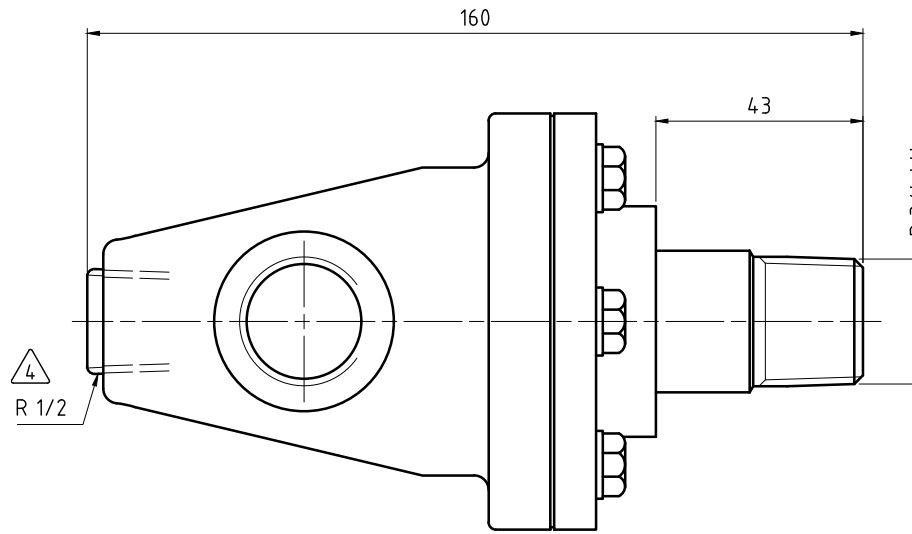

OPERATING DATA		
MEDIA		THERMAL OIL
PRESSURE	MAXIMUM	6.9 bar
TEMPERATURE	MAXIMUM	232 °C
SPEED	MAXIMUM	400 min ⁻¹
DRY RUN		NO



PROJECTION

SCALE: 1:1

MATERIAL:	INTERFACE CONTROL DRAWING
-----------	---------------------------

	DATE
--	------

NAME _____

TITLE:	DEUBLIN UNION
--------	---------------

D.	
----	--

--	--

BC-54000-12-21B

SHEET
A2

ISSUE	MODIFICATION	ECO	DATE	SIG

UNLESS SPECIFICALLY TOLERANCED, ALL DIMENSIONS ARE CONSIDERED REFERENCED TO THE SURFACE UNLESS OTHERWISE SPECIFIED.